

Product Environmental Profile

FIX RJ45 FOR S-ONE DPM






General information

Representative product	FIX RJ45 FOR S-ONE DPM - VDIR380006
Description of the product	The main function of RJ45 DPM connectors is to provide local area networking which is used to connect different type of devices like a switch, hub, PC, router, firewall to each other.
Functional unit	To protect, link, splice or connect a connection point during 10 years with a 17% use rate for a LAN: residential application.



Constituent materials

Reference product mass	49.5 g including the product, its packaging.
------------------------	--

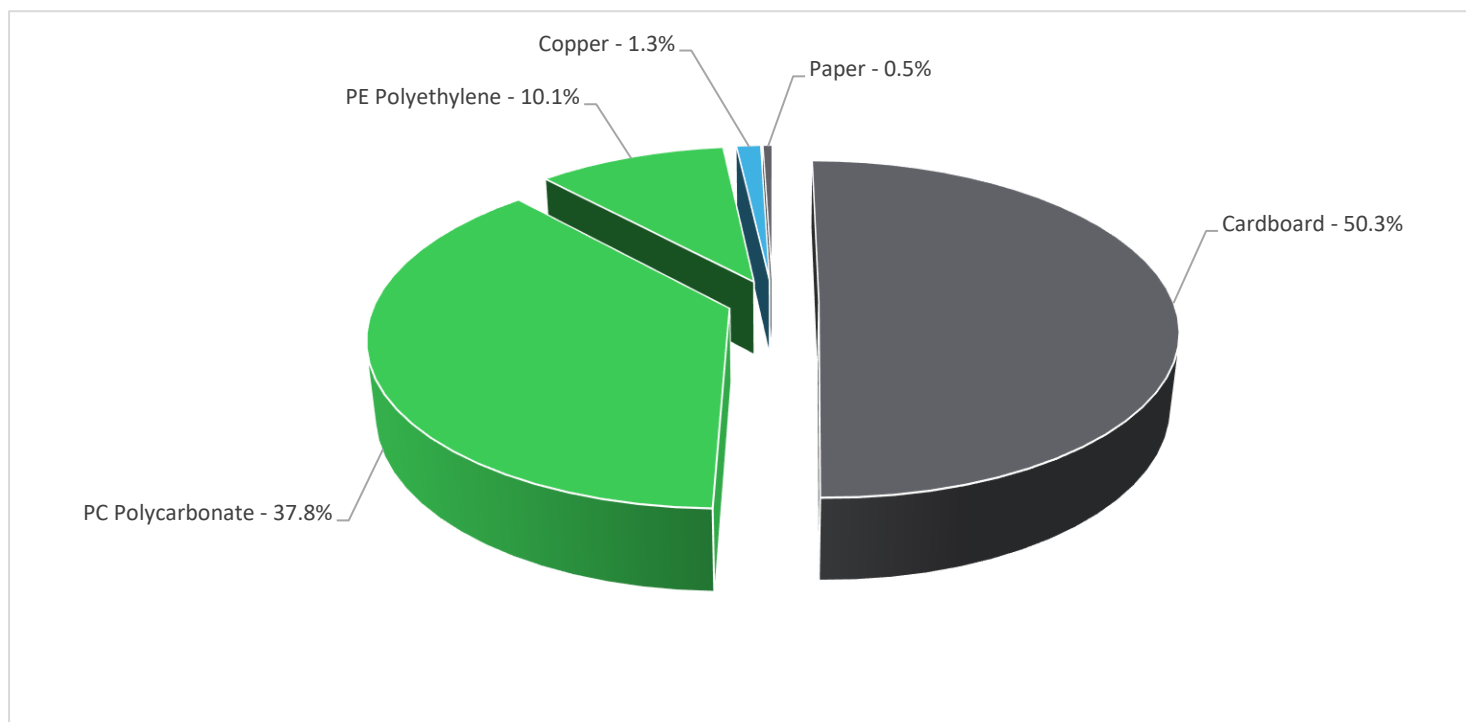

Plastics	47.9%
Metals	1.3%
Others	50.8%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The FIX RJ45 FOR S-ONE DPM presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 30 g, consisting of cardboard (82.58%), PE film (16.51%), paper (0.89%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 4% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	10 years			
Product category	Copper telecom accessory			
Installation elements	No special components needed			
Use scenario	Product dissipation is 0.004927 W @ 100% load rate and 0.004927 W @ Load rate: 100% of In & Use rate: 17% of the RLT			
Geographical representativeness	Europe			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
Energy model used	Manufacturing	Installation	Use	End of life
	Manufacturing plant: CHASSENEUIL, France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		FIX RJ45 FOR S-ONE DPM - VDIR380006					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.03E-06	1.02E-06	0*	0*	3.12E-09	0*
Contribution to the soil and water acidification	kg SO ₂ eq	6.47E-04	4.74E-04	9.23E-06	7.59E-06	1.50E-04	6.29E-06
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	9.15E-04	8.98E-04	2.14E-06	3.30E-06	9.05E-06	2.06E-06
Contribution to global warming	kg CO ₂ eq	2.19E-01	1.75E-01	1.95E-03	1.85E-03	3.59E-02	4.72E-03
Contribution to ozone layer depletion	kg CFC11 eq	1.68E-08	1.43E-08	3.95E-12	1.40E-11	2.34E-09	1.53E-10
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	5.53E-05	4.52E-05	6.65E-07	5.72E-07	8.24E-06	6.29E-07
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	1.31E-01	8.33E-04	0*	0*	1.30E-01	0*
Total Primary Energy	MJ	3.87E+00	3.07E+00	2.76E-02	2.34E-02	7.18E-01	2.93E-02

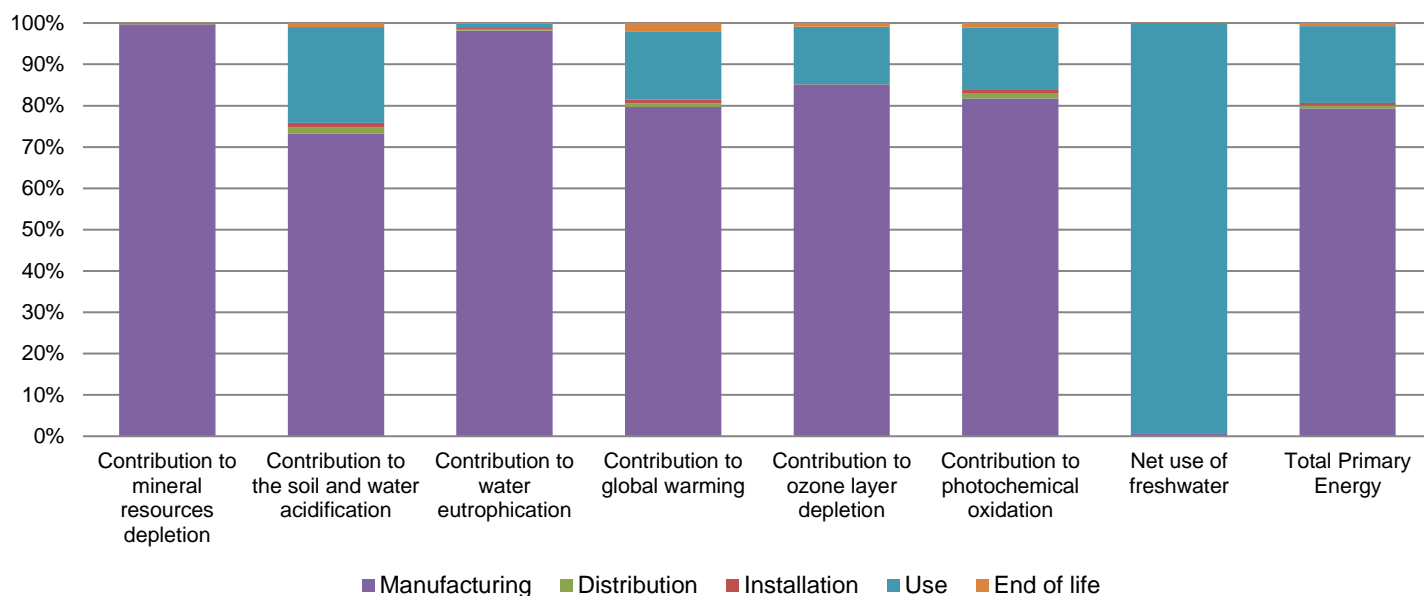

Optional indicators		FIX RJ45 FOR S-ONE DPM - VDIR380006					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.91E+00	2.43E+00	2.74E-02	2.27E-02	4.08E-01	2.36E-02
Contribution to air pollution	m³	1.30E+01	1.10E+01	8.99E-02	1.08E-01	1.55E+00	2.18E-01
Contribution to water pollution	m³	4.08E+01	3.85E+01	3.21E-01	2.65E-01	1.48E+00	2.96E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.36E-02	2.36E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.00E-01	1.09E-01	3.68E-05	1.46E-04	9.13E-02	3.21E-05
Total use of non-renewable primary energy resources	MJ	3.67E+00	2.96E+00	2.76E-02	2.32E-02	6.27E-01	2.93E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.21E-01	2.98E-02	3.68E-05	1.46E-04	9.13E-02	3.21E-05
Use of renewable primary energy resources used as raw material	MJ	7.91E-02	7.91E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.71E+00	2.00E+00	2.76E-02	2.32E-02	6.27E-01	2.93E-02
Use of non renewable primary energy resources used as raw material	MJ	9.60E-01	9.60E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.15E-01	7.66E-02	0*	0*	1.87E-05	3.87E-02
Non hazardous waste disposed	kg	5.30E-01	3.91E-01	6.93E-05	4.16E-03	1.34E-01	8.93E-05
Radioactive waste disposed	kg	2.12E-04	1.22E-04	4.94E-08	1.74E-07	8.95E-05	1.45E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3.18E-02	4.68E-03	0*	2.63E-02	0*	7.95E-04
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	9.40E-04	0*	0*	0*	0*	9.40E-04
Exported Energy	MJ	7.92E-05	7.51E-06	0*	7.17E-05	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators) except indicator NUFW is mostly in Use phase.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2102019_V1-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	02/2021	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2102019_V1-EN

© 2019 - Schneider Electric – All rights reserved

02/2021