
Product Environmental Profile

Twinbus IP Door Station






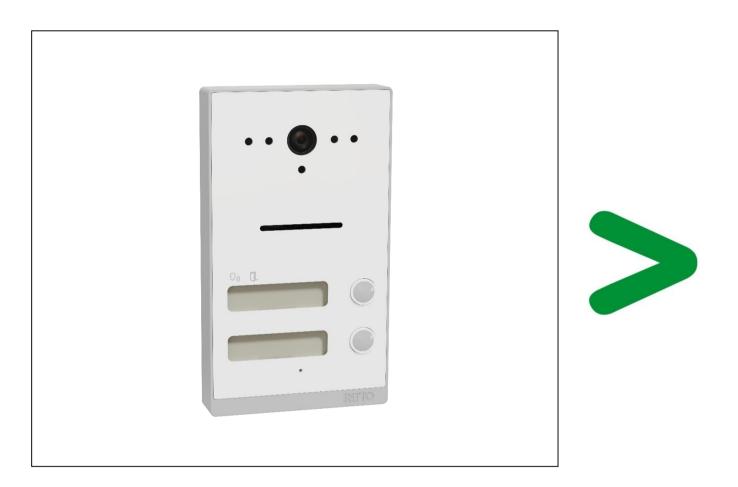

General information

Representative product	Twinbus IP Door Station - RGE2015200					
Description of the product	The TwinBus IP door station is a video door station for a maximum of 2 residenti al units.					
Functional unit	The TwinBus IP door station is a video door station. The door station is available for surface-mounted or flush-mounted installation. The function unit is accordance with the following technical: - Input voltage (Bus):SELV DC 24 V - Current consumption:<1.2 A - Rated voltage:DC 12 V - Ambient temperature:-25 °C ~55 °C - IP55					

Constituent materials

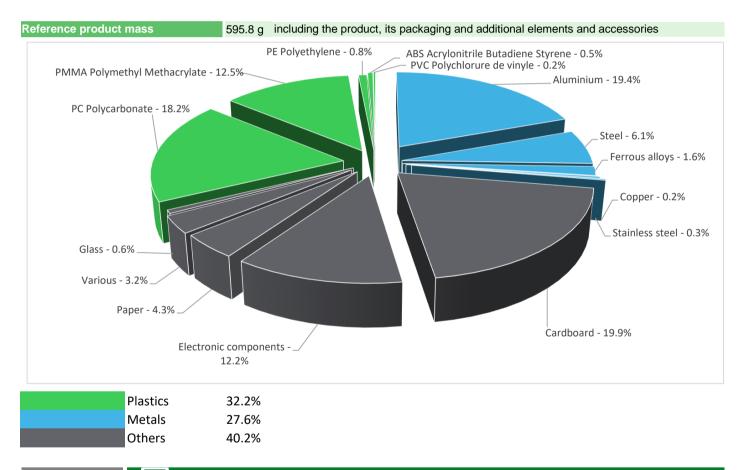

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate – BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

The Twinbus IP Door Station presents the following relevent environmental aspects								
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified							
	Weight and volume of the packaging optimized, based on the European Union's packaging directive							
Distribution	Packaging weight is 148.8 g, consisting of cardboard (80.0%), paper (17.3%), PE (2.7%)							
	Product distribution optimised by setting up local distribution centres							
Installation	Ref RGE2015200 does not require any installation operations.							
Use	The product does not require special maintenance operations.							
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials							
	This product contains Electronic card (75.3g) that should be separated from the stream of waste so as to optimize end-of-life treatment.							
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website							
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page							
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 36% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).							

Environmental impacts

Reference life time	10 years						
Product category	Other equipments - Active product						
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.						
Use scenario	The product is in active mode 2% of the time with a power use of 4.3W, in stand-by mode 1% of the time with a power use of 3.4W and in sleep mode 97% of the time with a power use of 2.1W, for 10 years.						
Geographical representativeness	Europe						
Technological representativeness	The TwinBus IP door station is a video door station for a maximum of 2 residenti al units.						
	Manufacturing	Installation	Use	End of life			
Energy model used	Energy model used: China	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU- 27			

Compulsory indicators	Twinbus IP Door Station - RGE2015200						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.07E-03	1.07E-03	0*	0*	5.08E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	8.79E-01	3.51E-02	3.51E-04	0*	8.44E-01	1.70E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3.85E-02	6.73E-03	8.08E-05	9.48E-06	3.16E-02	6.62E-05
Contribution to global warming	kg CO ₂ eq	1.25E+02	1.35E+01	7.69E-02	0*	1.12E+02	1.79E-01
Contribution to ozone layer depletion	kg CFC11 eq	2.89E-05	1.81E-06	0*	0*	2.71E-05	6.48E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	4.27E-02	2.82E-03	2.50E-05	0*	3.99E-02	1.58E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.25E+00	9.55E-01	0*	0*	2.91E-01	0*
Total Primary Energy	MJ	2.44E+03	1.76E+02	1.09E+00	0*	2.26E+03	7.71E-01

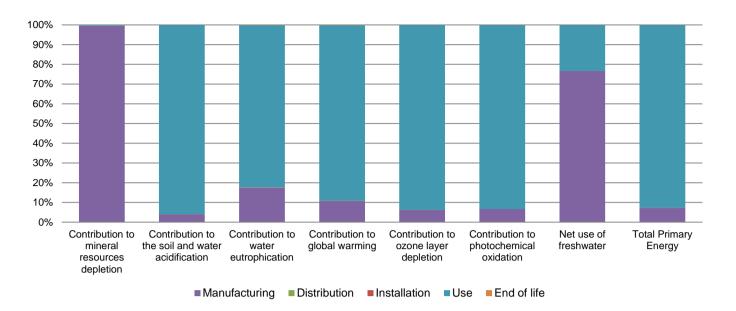

Optional indicators	Twinbus IP Door Station - RGE2015200						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.29E+03	1.34E+02	1.08E+00	0*	1.15E+03	6.26E-01
Contribution to air pollution	m³	6.02E+03	1.23E+03	3.27E+00	0*	4.78E+03	5.60E+00
Contribution to water pollution	m³	6.51E+03	1.81E+03	1.26E+01	1.24E+00	4.68E+03	9.30E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.14E-01	1.14E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.68E+02	6.49E+00	0*	0*	1.62E+02	0*
Total use of non-renewable primary energy resources	MJ	2.27E+03	1.69E+02	1.09E+00	0*	2.10E+03	7.71E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.67E+02	5.70E+00	0*	0*	1.62E+02	0*
Use of renewable primary energy resources used as raw material	MJ	7.91E-01	7.91E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.26E+03	1.62E+02	1.09E+00	0*	2.10E+03	7.71E-01
Use of non renewable primary energy resources used as raw material	MJ	7.39E+00	7.39E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.99E+01	1.91E+01	0*	0*	0*	8.16E-01
Non hazardous waste disposed	kg	4.25E+02	7.89E+00	0*	0*	4.17E+02	0*
Radioactive waste disposed	kg	3.45E-01	4.65E-03	0*	0*	3.40E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3.58E-01	5.34E-02	0*	1.45E-01	0*	1.60E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	4.26E-02	0*	0*	0*	0*	4.26E-02
Exported Energy	MJ	4.58E-04	4.30E-05	0*	4.15E-04	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2020-12 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

ENVPEP2201024_V1 - Product Environmental Profile - Twinbus IP Door Station

Registration number	ENVPEP2201024_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	02/2022	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS
Country Customer Care Center

http://www.schneider-electric.com/contact

35, rue Joseph Monier CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439 Capital social 896 313 776 €

<u>www.schneider-electric.com</u> Published by Schneider Electric

ENVPEP2201024_V1 © 2019 - Schneider Electric – All rights reserved 02/2022