

DEVICE RATING					
DEVICE	RATING	TYPE	MAKE	MODEL	ACCESSORIES
QB	400AF, 480/277VAC	3P MCCB	Schneider Electric	LJF34400WU33X	---
Q1	600AF, 480/277VAC	3P MCCB	Schneider Electric	LJF34600WU33X	1 AUX. SWITCH (SPDT TYPE)
Q2	400AF, 480/277VAC	4P MCCB	Schneider Electric	LJF44400WU33X	1 AUX. SWITCH (SPDT TYPE)
Q3	400AF, 480/277VAC	4P MCCB	Schneider Electric	LJF44400WU33X	1 AUX. SWITCH (SPDT TYPE)
QSF	400AF, 600VAC	3P MCCB	Schneider Electric	LJF36400CU33X	1 AUX. SWITCH (SPDT TYPE)

**LEGEND:**

----- AC CABLE - PROVIDED BY OTHERS

----- DC CABLE - PROVIDED BY OTHERS

- NOTES:**
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES. THE GROUNDING SYSTEM SHALL BE INSTALLED AS A SEPARATELY DERIVED SYSTEM IN ACCORDANCE WITH LOCAL AND NATIONAL CODES.
  - REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
  - DRAWING DEPICTS POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF PHYSICAL LAYOUT, PLEASE REFER TO MECHANICAL DRAWINGS FOR PHYSICAL LAYOUT.
- △ 4. MAXIMUM AVAILABLE FAULT CURRENT IS 65kAIC.
- △ 5. AC SOURCE TO BE 480VAC 3PH 3 WIRE+GROUND (CONTACT Schneider Electric, IF OTHER). REFER TO SHEET-3 FOR RECOMMENDED OCPD RATINGS.
- △ 6. AC CABLING TO BE 600V RATED, 3 WIRE+GROUND.
- △ 7. THE GROUNDING ELECTRODE CONDUCTOR (GEC) SHALL BE PROVIDED BY OTHERS.
- △ 8. SINGLE MAINS CONFIGURATION IS A DEFAULT. REFER TO SHEET-2 FOR DUAL MAINS.
- △ 9. DISTRIBUTION MODULES ARE NOT PART OF PDPM100G6F-M, CAN BE PURCHASED SEPARATELY FROM Schneider Electric.
- △ 10. SEE INSTALLATION MANUAL FOR RECOMMENDED SETTINGS.
- △ 11. REFER TO SHEET-3 FOR RECOMMENDED OCPD RATINGS
- △ 12. FOR PROPER INSTALLATION OF EPO, MIB BREAKER MUST BE INTERRUPTED UPON OF THE EPO BUTTON. A SHUNT TRIP COIL MAY THEREFORE BE NECESSARY FOR THIS PURPOSE. FOR MORE DETAILS, SEE EPO SECTION IN THE INSTALLATION MANUAL.

UPS SYSTEM OUTPUT 100kVA 208V 3PH

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.




TITLE: SYMMETRA PX100 - NO BATTERY  
 INPUT: 480V 3PH, SINGLE MAINS  
 OUTPUT: 208V 100KW  
 BOTTOM FEED WITH PDU & XFMR  
 SYSTEM ONE LINE DIAGRAM - SINGLE MAINS

DWG NO: SY100K100G6F1BPD-NB-SD  
 DRAWN: JAYAPRAKASH 18-JAN-16  
 ENGINEER: A WARNER 18-JAN-16  
 APPROVED: N BOBBITT 18-JAN-16

REV. 1  
 ANGLE PROJECTION  
 N.A.

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 3

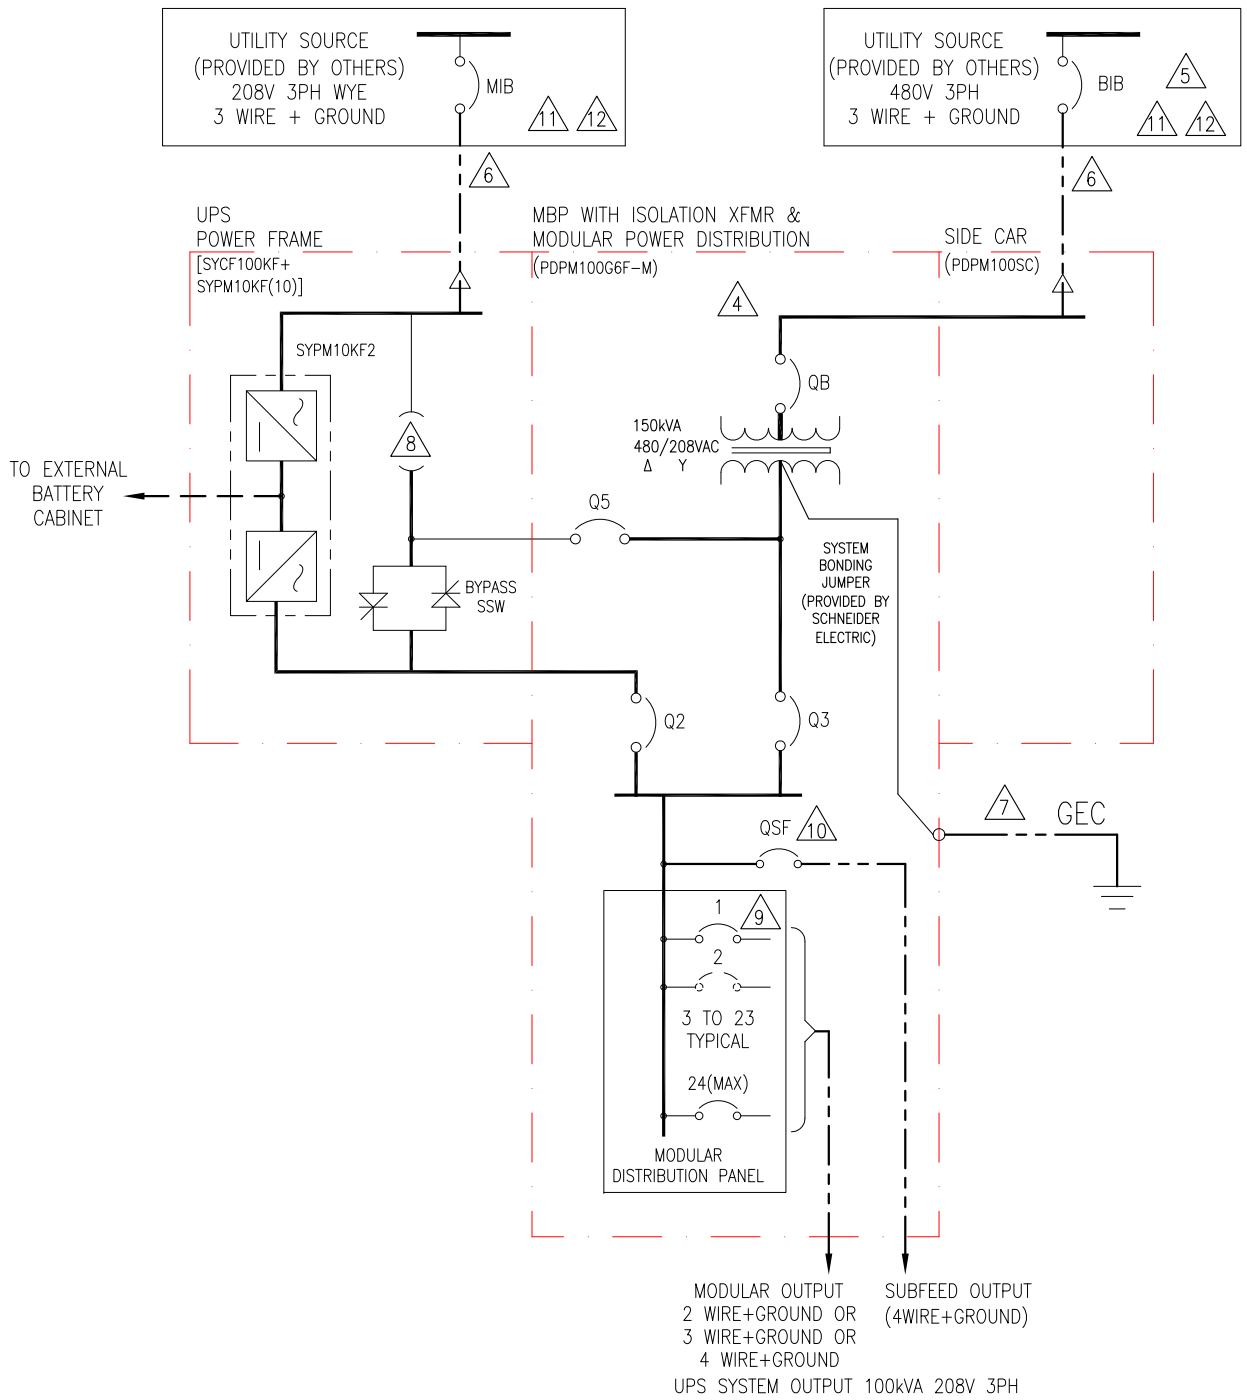

DEVICE RATING					
DEVICE	RATING	TYPE	MAKE	MODEL	ACCESSORIES
QB	400AF, 480/277VAC	3P MCCB	Schneider Electric	LJF34400WU33X	---
Q5	600AF, 480/277VAC	3P MCCB	Schneider Electric	LJF34600WU33X	1 AUX SWITCH (SPDT TYPE)
Q2	400AF, 480/277VAC	4P MCCB	Schneider Electric	LJF44400WU33X	1 AUX SWITCH (SPDT TYPE)
Q3	400AF, 480/277VAC	4P MCCB	Schneider Electric	LJF44400WU33X	1 AUX SWITCH (SPDT TYPE)
QSF	400AF, 600VAC	3P MCCB	Schneider Electric	LJF36400CU33X	1 AUX SWITCH (SPDT TYPE)

**LEGEND:**

----- AC CABLE - PROVIDED BY OTHERS

----- DC CABLE - PROVIDED BY OTHERS

- NOTES:**
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
  - REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
  - DRAWING DEPICTS POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF PHYSICAL LAYOUT, PLEASE REFER TO MECHANICAL DRAWINGS FOR PHYSICAL LAYOUT.
  - MAXIMUM AVAILABLE FAULT CURRENT IS 65kAIC.
  - AC SOURCE TO BE 480VAC 3PH 3 WIRE+GROUND (CONTACT Schneider Electric, IF OTHER).
  - AC CABLING TO BE 600V RATED, 3 WIRE+GROUND.
  - THE GROUNDING ELECTRODE CONDUCTOR (GEC) SHALL BE PROVIDED BY OTHERS.
  - SINGLE MAINS CONFIGURATION IS A DEFAULT.  
FOR DUAL MAINS CONFIGURATION REMOVE THE 3 SHORTING STRAPS/WIRES.
  - DISTRIBUTION MODULES ARE NOT PART OF PDPM100G6F-M, CAN BE PURCHASED SEPARATELY FROM Schneider Electric.
  - SEE INSTALLATION MANUAL FOR RECOMMENDED SETTINGS.
  - REFER TO SHEET-3 FOR RECOMMENDED OCPD RATINGS.
  - FOR PROPER INSTALLATION OF EPO, MIB BREAKER MUST BE INTERRUPTED UPON OF THE EPO BUTTON. A SHUNT TRIP COIL MAY THEREFORE BE NECESSARY FOR THIS PURPOSE. FOR MORE DETAILS, SEE EPO SECTION IN THE INSTALLATION MANUAL.

MODULAR OUTPUT  
2 WIRE+GROUND OR  
3 WIRE+GROUND OR  
4 WIRE+GROUND

SUBFEED OUTPUT  
(4WIRE+GROUND)

UPS SYSTEM OUTPUT 100kVA 208V 3PH

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SYMMETRA PX100 - NO BATTERY  
INPUT: 480V 3PH, DUAL MAINS  
OUTPUT: 208V 100KW  
BOTTOM FEED WITH PDU & XFMR  
SYSTEM ONE LINE DIAGRAM - DUAL MAINS

PROJECT: SUBMITTAL DRAWINGS SHEET 2 OF 3

DWG NO: SY100K100G6F2BPD-NB-SD

DRAWN: JAYAPRAKASH 18-JAN-16

ENGINEER: A WARNER 18-JAN-16

APPROVED: N BOBBITT 18-JAN-16

REV. 1

ANGLE PROJECTION

N.A.

# Symmetra® PX 100K UPS Frame Submittal Data - w/ Modular PDU - w/480V Transformer

UPS Rating			Rectifier AC Input MIB Dual Feed <sup>1</sup>									Transformer AC Input MIB Single Feed or BIB Dual Feed <sup>4</sup>								External Battery System <sup>5</sup>					AC Output	
			Voltage		Current		Recommendations <sup>3, 9, 10</sup>					Voltage	Currents		Recommendations <sup>3, 9</sup>				Nominal VDC	Battery kW	Current @ Nom. VDC	Recommendations <sup>3, 9</sup>		Current		
UPS Frame Rating	Qty of 10kW Power Modules <sup>8</sup>	kVA	kW	Input <sup>1</sup>	Output <sup>2</sup>	Full Load	Max. <sup>6</sup>	100% OCPD	100% Cable	80% OCPD	80% Cable	Input	NOM.	Max. <sup>7</sup>	100% OCPD	100% Cable	80% OCPD	80% Cable							100% OCPD	100% Cable
<b>100kVA/100kW 100K Frame</b>	1	10	10	208	208	33	36	40A	1x 8	45A	1x 8	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	11	28	30A	1x 8	28	35	
	2	20	20	208	208	66	72	80A	1x 4	90A	1x 4	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	22	56	60A	1x 6	56	70	
	3	30	30	208	208	100	108	110A	1x 2	125A	1x 1	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	32	84	90A	1x 4	84	105	
	4	40	40	208	208	133	144	150A	1x 1/0	175A	1x 2/0	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	43	113	125A	1x 2	112	140	
	5	50	50	208	208	166	180	200A	1x 3/0	225A	1x 4/0	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	54	141	150A	1x 1/0	140	175	
	6	60	60	208	208	199	216	225A	1x 4/0	250A	1x 250	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	65	169	175A	1x 2/0	168	210	
	7	70	70	208	208	232	252	300A	1x 250	300A	1x 350	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	76	197	200A	1x 3/0	196	245	
	8	80	80	208	208	266	288	300A	1x 350	350A	1x 400	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	86	225	225A	1x 4/0	224	280	
	9	90	90	208	208	299	324	350A	1x 400	400A	1x 500	480	N/A	N/A	N/A	N/A	N/A	N/A	2x 192	97	253	300A	1x 250	252	315	
	10 <sup>8</sup>	<b>100</b>	<b>100</b>	<b>208</b>	<b>208</b>	<b>332</b>	<b>360</b>	<b>400A</b>	<b>1x 500</b>	<b>450A</b>	<b>2x 4/0</b>	<b>480</b>	<b>165A</b>	<b>N/A</b>	<b>175A</b>	<b>1x 3/0</b>	<b>225A</b>	<b>1x 4/0</b>	<b>2x 192</b>	<b>108</b>	<b>282</b>	<b>300A</b>	<b>1x 300</b>	<b>278</b>	<b>347</b>	

[APC Symmetra® PX](#)

Notes. 480 V Modular PDU: PDPM100G6F-M

1. The rectifier Input source for dual feed must be 208V Wye 3-wire + Ground. Contact Schneider Electric if other.
2. Output is either 208V Wye 3-wire + Ground or 4-wire + GROUND.
3. Recommended cables are THHN AWG/kcmil minimum requirement in raceway, sized for 30°C environment, 75°C terminations, PFC load, and three (3) current carrying conductors per circuit. All cabling must comply with installation site conditions and any applicable Local or National Codes.
4. The transformer input source must be 480V 3-wire + Ground, and the OCPD must be capable of supporting a inrush current of 1750A.
5. Contact Schneider Electric for assistance with all external battery designs. Maximum allowed DC cabling voltage drop is 1 VDC.
6. Electronic Input Current Limit
7. This is the UPS short time rating of 125% Overload for 10 minutes. Actual short time performance may be limited by the overcurrent protective device selected.
8. For maximum scalability or future expansion it is recommended that the UPS frames be installed at their full ratings - see bold highlighted data
9. All OCPD's and cabling are by others.
10. Dual feed only for mains 1 input. See Bypass AC Input for mains 2 input.
11. OCPD = Over Current Protective Device
12. Final selections are responsibility of Engineer of record based on installed conditions and SCC/ Selective co-ordination/ arc-flash analysis.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SYMMETRA PX100 - NO BATTERY  
 INPUT: 480V 3PH  
 OUTPUT: 208V 100KW  
 WITH PDU & XFMR  
 SITE PLANNING DATA

DWG NO: SY100K100G6FBPD-NB-SPD REV. 0

DRAWN: JAYAPRAKASH 08-OCT-15

ENGINEER: A WARNER 15-OCT-15

APPROVED: N BOBBITT 15-OCT-15

PROJECT: SUBMITTAL DRAWINGS SHEET 3 OF 3

ANGLE PROJECTION N.A