

# Product Environmental Profile

**Lexium BCH18 Servo Motor 400W**

**Servo systems**






## General information

<b>Representative product</b>	Lexium BCH18 Servo Motor 400W - BCH18MD04332A5C
<b>Description of the product</b>	The main purpose of the BCH18 servo motor is together with Lexium18 drive as well as a comprehensive portfolio of options and accessories to achieve a high performance drive solution.
<b>Description of the range</b>	This range consists of products BCH18 servo motor, with power from 50w to 3000w for operation on 220V AC control supply  The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
<b>Functional unit</b>	During the 10 years, Lexium BCH18 servo motor is to provide our customer a coordinated and synchronised motion control with a nominal torque of 1.27NM & a nominal speed of 3000rpm in 220V power supply.



## Constituent materials

<b>Reference product mass</b>	1310 g including the product, its packaging and additional elements and accessories
-------------------------------	---

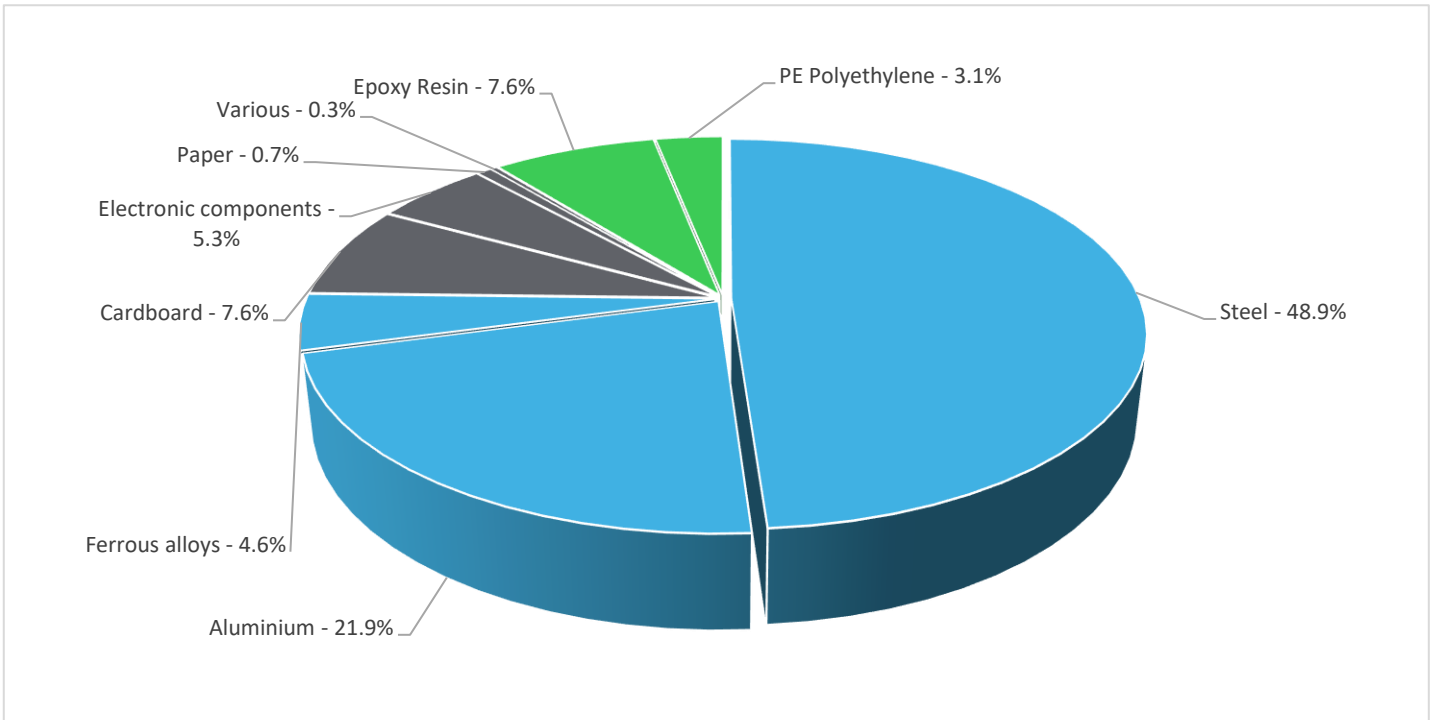

Plastics	10.7%
Metals	75.4%
Others	13.9%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>



## Additional environmental information

The Lexium BCH18 Servo Motor 400W presents the following relevant environmental aspects

<b>Design</b>	Products are designed to be "Green Premium"
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 150 g, consisting of Cardboard 100g (66.67%), EPE 41g(27.33%), paper 9g (6.00%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains Electronic Board (Communication) (34.25g) Cable(36g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>82%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




## Environmental impacts

<b>Reference life time</b>	10 years			
<b>Product category</b>	Other equipments - Active product			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	The product is in active mode 80% of the time with a power use of 46W and in stand-by mode 20% of the time with a power use of 1.5W, for 10 years.			
<b>Geographical representativeness</b>	China			
<b>Technological representativeness</b>	The main purpose of the BCH18 servo motor is together with Lexium18 drive as well as a comprehensive portfolio of options and accessories to achieve a high performance drive solution.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN

### Compulsory indicators

### Lexium BCH18 Servo Motor 400W - BCH18MD04332A5C

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.10E-03	1.08E-03	0*	0*	1.45E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	3.63E+00	4.28E-02	7.72E-04	0*	3.58E+00	3.71E-04
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	9.55E-01	8.57E-03	1.78E-04	0*	9.46E-01	1.03E-04
Contribution to global warming	kg CO <sub>2</sub> eq	3.32E+03	1.53E+01	0*	0*	3.31E+03	0*
Contribution to ozone layer depletion	kg CFC11 eq	5.65E-05	3.02E-05	0*	0*	2.63E-05	1.00E-08
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	4.27E-01	3.48E-03	5.51E-05	0*	4.23E-01	0*
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	3.96E+00	2.68E-01	0*	0*	3.69E+00	0*
Total Primary Energy	MJ	5.43E+04	2.27E+02	0*	0*	5.41E+04	0*

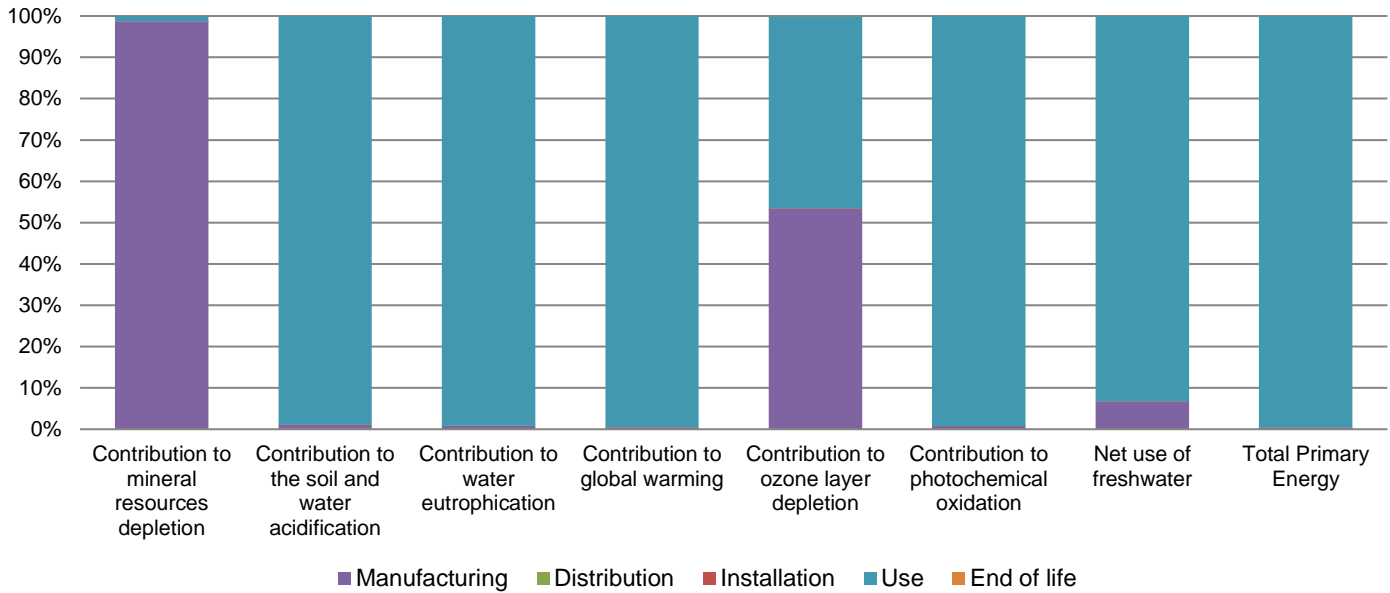

Optional indicators		Lexium BCH18 Servo Motor 400W - BCH18MD04332A5C						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Contribution to fossil resources depletion	MJ	5.01E+04	1.38E+02	0*	0*	5.00E+04	0*	
Contribution to air pollution	m <sup>3</sup>	3.45E+05	2.43E+03	0*	0*	3.43E+05	0*	
Contribution to water pollution	m <sup>3</sup>	1.66E+05	1.99E+03	2.78E+01	0*	1.64E+05	5.37E+01	
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Use of secondary material	kg	9.42E-02	9.42E-02	0*	0*	0*	0*	
Total use of renewable primary energy resources	MJ	2.78E+03	6.15E+00	0*	0*	2.77E+03	0*	
Total use of non-renewable primary energy resources	MJ	5.15E+04	2.21E+02	0*	0*	5.13E+04	0*	
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.78E+03	5.70E+00	0*	0*	2.77E+03	0*	
Use of renewable primary energy resources used as raw material	MJ	4.51E-01	4.51E-01	0*	0*	0*	0*	
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.15E+04	2.14E+02	0*	0*	5.13E+04	0*	
Use of non renewable primary energy resources used as raw material	MJ	6.92E+00	6.92E+00	0*	0*	0*	0*	
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Hazardous waste disposed	kg	1.78E+02	6.96E+01	0*	0*	1.07E+02	1.45E+00	
Non hazardous waste disposed	kg	6.13E+02	1.30E+01	0*	0*	6.00E+02	0*	
Radioactive waste disposed	kg	2.85E-02	8.77E-03	4.28E-06	0*	1.98E-02	9.36E-06	
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	
Materials for recycling	kg	1.20E+00	1.21E-01	0*	1.20E-01	0*	9.60E-01	
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	
Materials for energy recovery	kg	1.99E-02	0*	0*	0*	0*	1.99E-02	
Exported Energy	MJ	3.45E-04	3.24E-05	0*	3.12E-04	0*	0*	

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.4, database version 2022-01 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

According to this environmental analysis, all the impacts (excepted "Mineral resources depletion") of other products in this family may be proportionally extrapolated by energy consumption values.

For "Mineral resources depletion", the impacts may be proportionally extrapolated by the products weights.

*Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.*

<i>Registration number</i>	ENVPEP2301011_V1	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	03/2023	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
<i>Internal</i>	X	<i>External</i>	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center

<http://www.se.com/contact>

35, rue Joseph Monier

CS 30323

FR- 92500 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP2301011\_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

03/2023