Product Environmental Profile

APC Smart-UPS RT 1000VA, 220V






General information							
Reference product	APC Smart-UPS RT 1000VA, 220V - SURT1000XLI-CH						
Description of the product	The Smart-UPS products provide high density, true double-conversion on-line power protection for various applications.						
	APC Smart-UPS RT 1-3KVA (220V)						
Description of the range	The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.						
Functional unit	To protect the load of 900 Watts against input power failure during 5 years and provide a backup time of 159 minutes in case of a power outage						

Constituent materials


Reference product mass

25400 g including the product, its packaging and additional elements and accessories

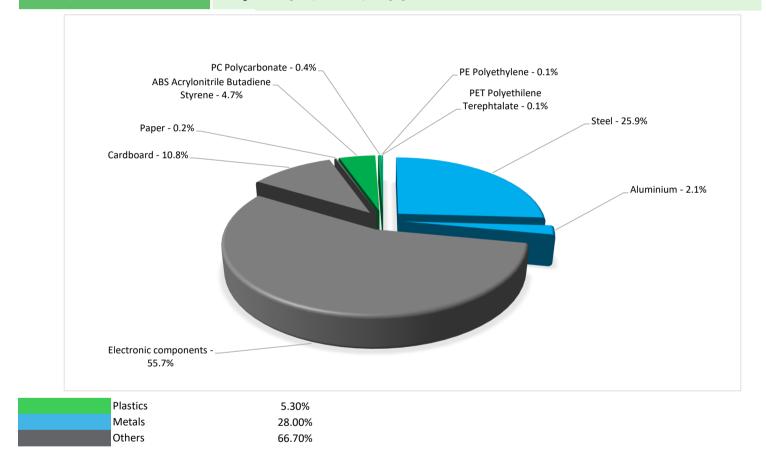

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

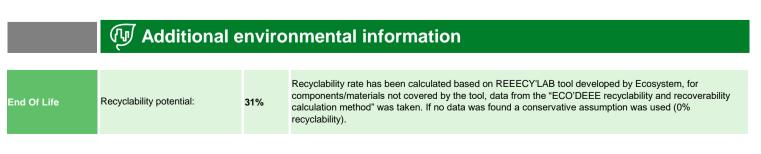

\mathcal{O} Environmental impacts

Reference service life time	5 years					
Installation elements	Ref SURT1000XLI-CH does not require any installation operations, the disposal of the packaging materials are accounted for 11.2% during the installation phase (including transport to disposal).					
Use scenario	Power consumption conforms to the requirements in PSR0010 where it is modeled to operate 50% load for 30% of the time, 75% load for 40% of the time, and 100% load for 30% of the time. The UPS is modeled to operate in normal mode (average efficiency of 91.1% and annual use of 514.9kWh) 75% of the time and in ECO mode (average efficiency of 95.6% and annual use of 246.22kWh) 25% of the time					
Technological representativeness	The means of material production, processing and transport modeled are representative of the technologies used in production.					
Geographical representativeness	China					
	[A1 - A3]	[A5]	[B6]	[C1 - C4]		
Energy model used	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN		

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators	APC Smart-UPS RT 1000VA, 220V - SURT1000XLI-CH							
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
	Onit	Total	[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	2.32E+03	3.26E+02	7.32E+00	4.98E+00	1.95E+03	2.39E+01	-3.84E+01
Contribution to climate change-fossil	kg CO2 eq	2.32E+03	3.25E+02	7.32E+00	4.76E+00	1.95E+03	2.39E+01	-3.79E+01
Contribution to climate change-biogenic	kg CO2 eq	1.38E+00	8.61E-01	0*	2.21E-01	2.80E-01	1.70E-02	-4.78E-01
Contribution to climate change-land use and land use change	kg CO2 eq	8.51E-07	5.48E-07	0*	3.04E-07	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	6.78E-05	4.89E-05	6.46E-06	3.31E-07	1.12E-05	9.52E-07	-4.89E-06
Contribution to acidification	mol H+ eq	1.74E+01	2.65E+00	3.18E-02	1.98E-02	1.46E+01	9.78E-02	-2.22E-01
Contribution to eutrophication, freshwater	kg (PO4)³⁻eq	1.21E-03	7.54E-04	8.57E-07	3.73E-05	4.13E-04	9.77E-06	-1.29E-04
Contribution to eutrophication marine	kg N eq	1.89E+00	2.85E-01	1.46E-02	5.24E-03	1.56E+00	2.48E-02	-2.56E-02
Contribution to eutrophication, terrestrial	mol N eq	2.11E+01	2.96E+00	1.58E-01	3.96E-02	1.77E+01	2.05E-01	-2.72E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	6.36E+00	1.00E+00	5.19E-02	1.06E-02	5.23E+00	7.20E-02	-8.91E-02
Contribution to resource use, minerals and metals	kg Sb eq	7.26E-02	7.26E-02	0*	0*	2.51E-05	0*	-7.68E-03
Contribution to resource use, fossils	MJ	3.79E+04	4.75E+03	8.89E+01	5.17E+01	3.16E+04	1.39E+03	-7.18E+02
Contribution to water use	m3 eq	3.02E+02	9.17E+01	3.71E-01	2.20E+00	8.62E+01	1.21E+02	-1.54E+01

Inventory flows Indicators			APC Smart-UPS RT 1000VA, 220V - SURT1000XLI-CH					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.44E+03	9.17E+01	0*	3.77E+00	3.34E+03	5.61E-01	2.03E+01
Contribution to use of renewable primary energy resources used as raw material	MJ	5.35E+01	5.35E+01	0*	0*	0*	0*	-4.91E+01
Contribution to total use of renewable primary energy resources	MJ	3.49E+03	1.45E+02	0*	3.77E+00	3.34E+03	5.61E-01	-2.88E+01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.77E+04	4.58E+03	8.89E+01	5.17E+01	3.16E+04	1.39E+03	-7.16E+02
Contribution to use of non renewable primary energy resources used as raw material	MJ	1.75E+02	1.75E+02	0*	0*	0*	0*	-2.59E+00
Contribution to total use of non-renewable primary energy resources	MJ	3.79E+04	4.75E+03	8.89E+01	5.17E+01	3.16E+04	1.39E+03	-7.18E+02
Contribution to use of secondary material	kg	4.44E-04	4.44E-04	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	7.35E+00	2.14E+00	8.65E-03	5.13E-02	2.01E+00	3.15E+00	-3.58E-01
Contribution to hazardous waste disposed	kg	9.51E+02	8.58E+02	0*	0*	5.93E+01	3.41E+01	-6.07E+02
Contribution to non hazardous waste disposed	kg	5.27E+02	1.68E+02	0*	1.62E+01	3.40E+02	1.87E+00	-1.03E+02
Contribution to radioactive waste disposed	kg	6.85E-02	5.04E-02	1.46E-03	2.17E-03	1.39E-02	5.11E-04	-2.23E-02
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	9.60E+00	2.22E-02	0*	2.78E+00	0*	6.79E+00	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report

and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2304006 V1	Drafting rules	PEP-PCR-ed4-2021 09 06				
Verifier accreditation N°	0	Supplemented by	PSR-0010-ed1-2014 02 11				
Date of issue	2023/06/07	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016							
nternal X External							
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)							
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019							
The elements of the present PEP cannot be compared with elements from another program.							

Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »

Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.se.com

SCHN-00001-V01.01-EN

Published by Schneider Electric ©2023 - Schneider Electric – All rights reserved

2023/06/07