



CURRENT IN MULTIPLES OF I_r ($I_r = \text{LONG-TIME SETTING} \times I_n$)

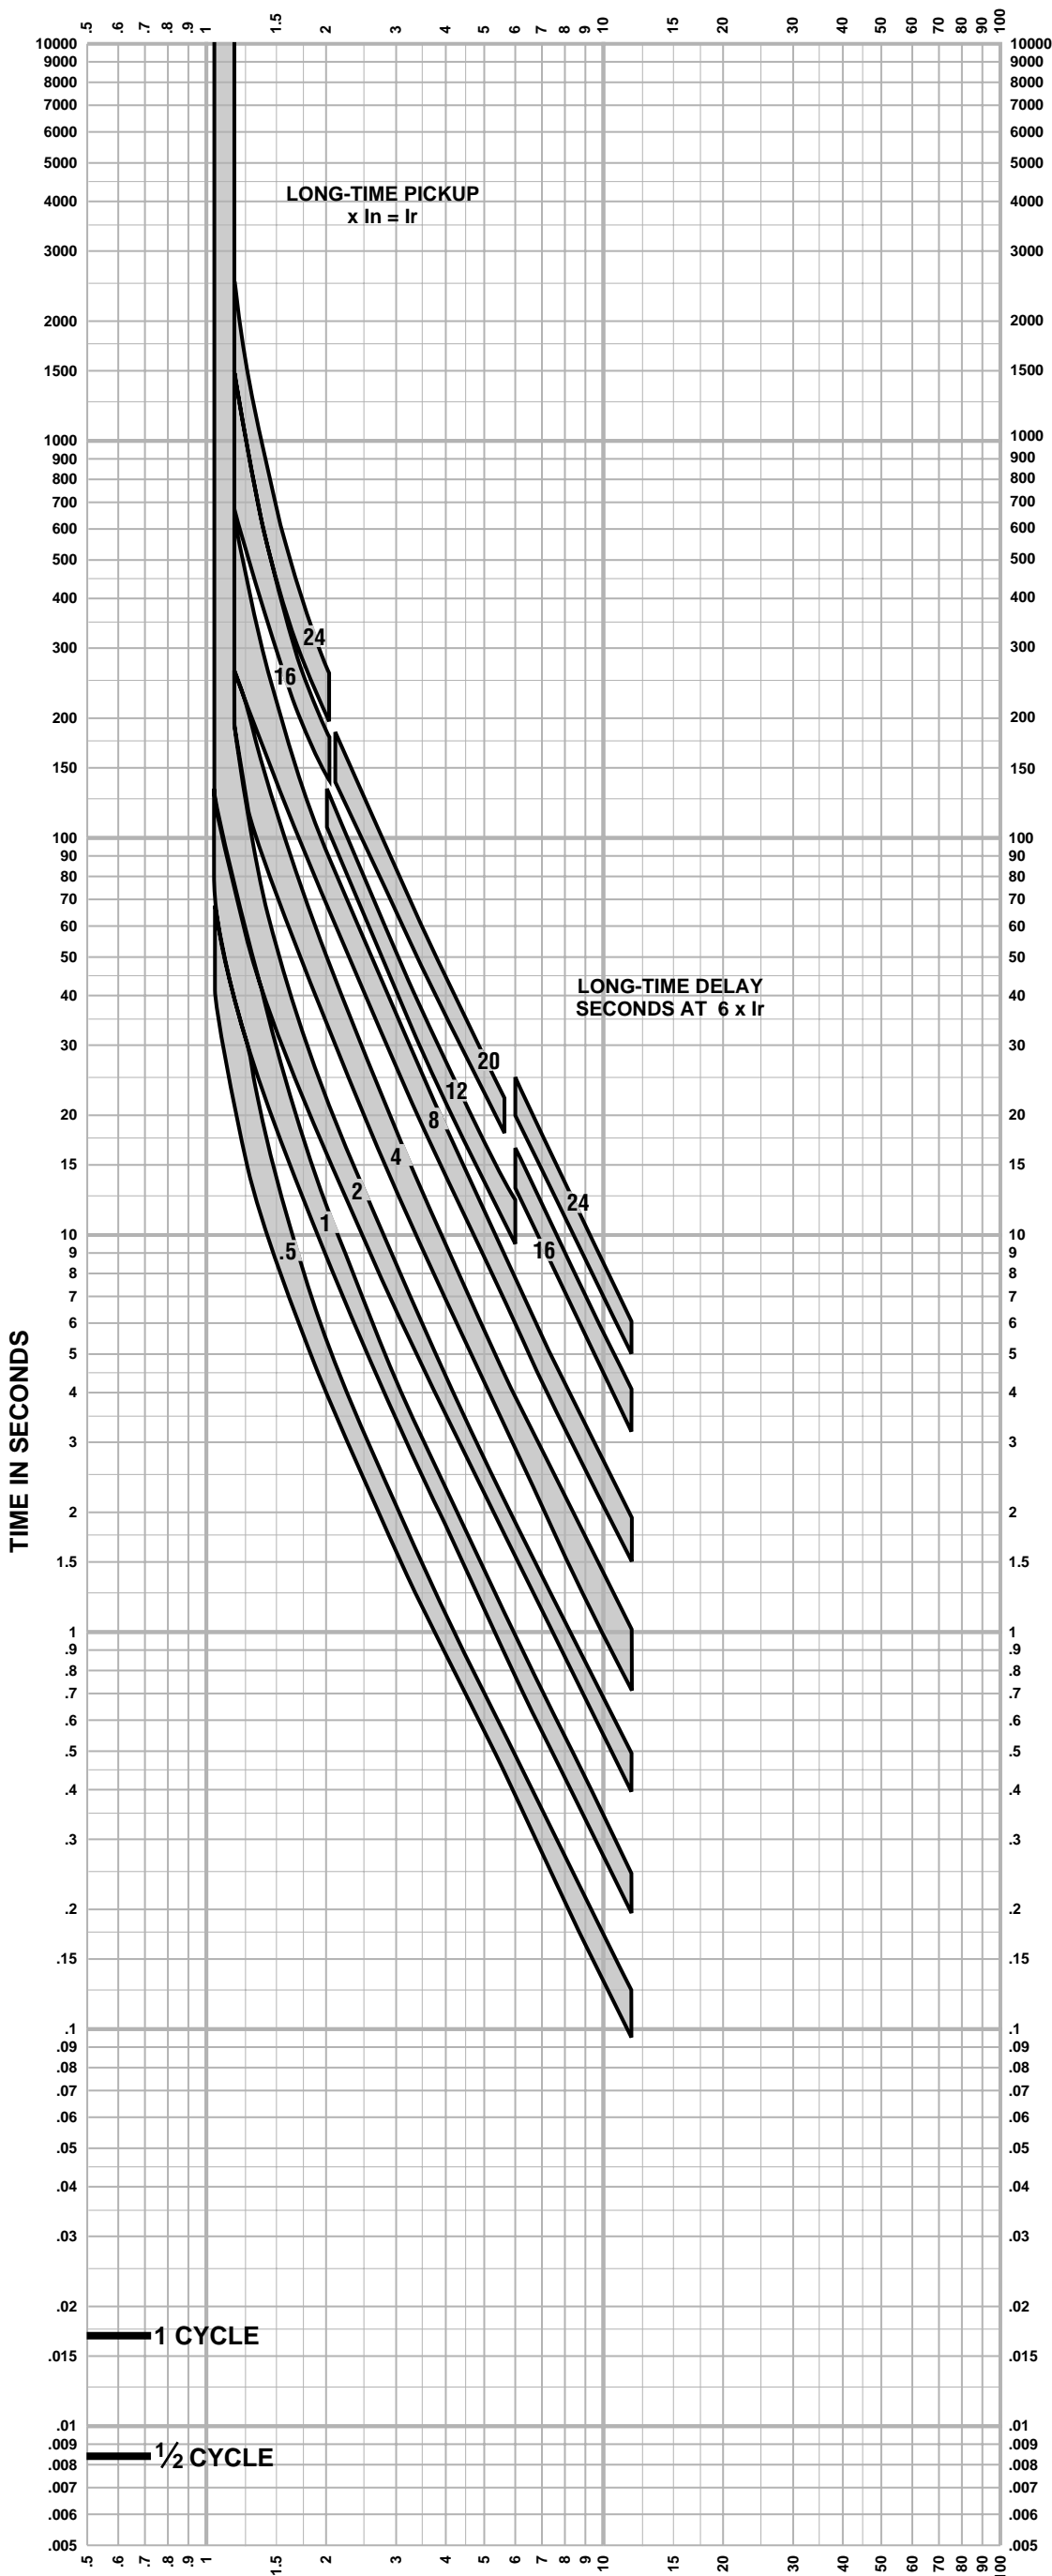

CURRENT IN MULTIPLES OF I_r
($I_r = \text{LONG-TIME SETTING} \times I_n$)

- Merlin Gerin
- Modicon
- Square D
- Telemecanique
- Federal Pioneer
- Federal Pacific

Schneider Electric Brands

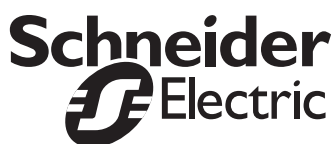

© 2000 Schneider Electric all rights reserved

**MICROLOGIC® 3.0 A TRIP UNIT
CHARACTERISTIC TRIP CURVE NO. 613-6**

Long-time Pickup and Delay

The time-current curve information is to be used for application and coordination purposes only.

Curves apply from -30°C to +60°C ambient temperature.

Notes:

1. There is a thermal-imaging effect that can act to shorten the long-time delay. The thermal-imaging effect comes into play if a current above the long-time delay pickup value exists for a time and then is cleared by the tripping of a downstream device or the circuit breaker itself. A subsequent overload will cause the circuit breaker to trip in a shorter time than normal. The amount of time delay reduction is inverse to the amount of time that has elapsed since the previous overload. Approximately 20 minutes is required between overloads to completely reset thermal-imaging.
2. The end of the curve is determined by the instantaneous setting.
3. Total clearing times shown include the response times of the trip unit, the circuit breaker opening, and the extinction of the current.
4. See 613-8 for instantaneous pickup trip curve.