

# Product Environmental Profile

**Modbus Glass door panel with number**




## General information

Reference product	Modbus Glass door panel with number - SLGM03DP
Description of the product	This product is a doorbell for hotel rooms. The bell will ring when pressing bell button in the door panel, except when DND is enabled that the bell will not ring.
Functional unit	The door panel with DND and MUR indicators, and there are come with RGB LED backlight, the RGB backlight have Room Number, each one can be configured separately with a different colour. The function unit is accordance with the following technical data: -IP20 -Supply voltage:24 V DC; -Power consumption (Full loaded) : 30 mA; -Temperature tolerance:± 0.5° C / ±0.9° F -Operating temperature:0 to 45° C / 32° to 113° F -Operating humidity:10% - 95% RH, non-condensing

## Constituent materials

Reference product mass	317.26 g including the product, its packaging and additional elements and accessories
------------------------	---

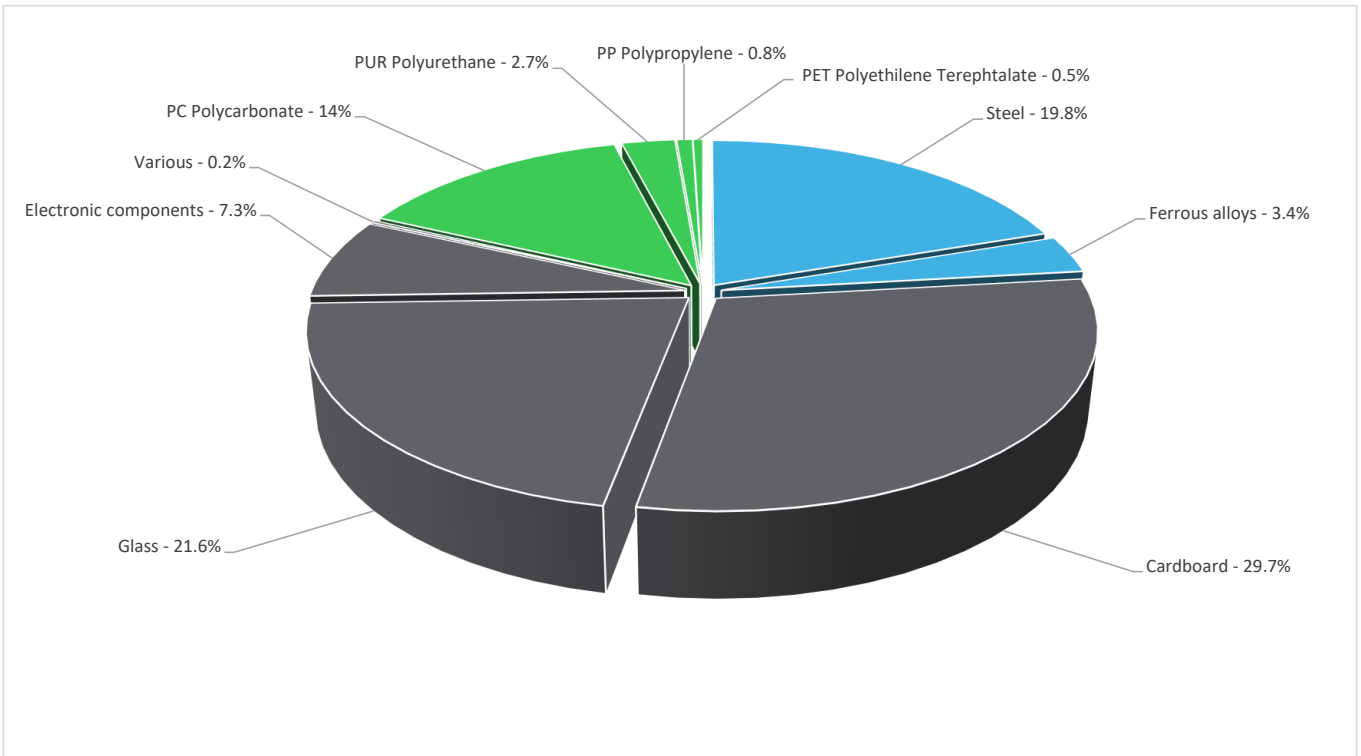

Plastics	18.00%
Metals	23.20%
Others	58.80%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <https://www.se.com/ww/en/work/support/green-premium/>



## Additional environmental information

End Of Life	Recyclability potential:	34%	Recyclability rate has been calculated based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	--



## Environmental impacts

Reference service life time	10 years			
Product category	Other equipments - Active product			
Installation elements	The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal).			
Use scenario	The product is in active mode 10% of the time with a power use of 0.624W and in stand-by mode 90% of the time with a power use of 0.39W, for 10 years.			
Technological representativeness	This product is a doorbell for hotel rooms. The bell will ring when pressing bell button in the door panel, except when DND is enabled that the bell will not ring.			
Geographical representativeness	China			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN	Electricity Mix; Production mix; Low voltage; CN

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			Modbus Glass door panel with number - SLGM03DP					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	4.60E+01	1.37E+01	9.15E-02	1.75E-01	3.16E+01	3.59E-01	-6.43E-01
Contribution to climate change-fossil	kg CO2 eq	4.60E+01	1.37E+01	9.15E-02	1.67E-01	3.16E+01	3.59E-01	-6.35E-01
Contribution to climate change-biogenic	kg CO2 eq	2.37E-02	1.15E-02	0*	7.74E-03	4.53E-03	0*	-7.49E-03
Contribution to climate change-land use and land use change	kg CO2 eq	8.87E-08	2.02E-08	0*	6.85E-08	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.20E-06	1.92E-06	8.07E-08	1.19E-08	1.80E-07	1.66E-09	-1.09E-07
Contribution to acidification	mol H+ eq	3.26E-01	8.75E-02	3.97E-04	6.99E-04	2.37E-01	7.89E-04	-3.42E-03
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	3.38E-05	2.55E-05	1.07E-08	1.57E-06	6.67E-06	3.82E-08	-3.30E-06
Contribution to eutrophication marine	kg N eq	3.55E-02	9.67E-03	1.83E-04	1.86E-04	2.53E-02	1.52E-04	-4.68E-04
Contribution to eutrophication, terrestrial	mol N eq	3.94E-01	1.02E-01	1.98E-03	1.42E-03	2.87E-01	1.70E-03	-4.74E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.21E-01	3.44E-02	6.49E-04	3.80E-04	8.45E-02	5.83E-04	-1.60E-03
Contribution to resource use, minerals and metals	kg Sb eq	1.54E-03	1.54E-03	0*	0*	4.05E-07	0*	-1.07E-04
Contribution to resource use, fossils	MJ	6.93E+02	1.63E+02	1.11E+00	1.80E+00	5.11E+02	1.54E+01	-1.08E+01
Contribution to water use	m3 eq	4.99E+00	3.41E+00	4.64E-03	9.17E-02	1.39E+00	9.18E-02	-3.18E-01

Additional indicators for the French regulation are available as well

Inventory flows Indicators			Modbus Glass door panel with number - SLGM03DP					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.85E+01	4.32E+00	0*	1.43E-01	5.41E+01	0*	7.15E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	1.88E+00	1.88E+00	0*	0*	0*	0*	-1.31E+00
Contribution to total use of renewable primary energy resources	MJ	6.04E+01	6.20E+00	0*	1.43E-01	5.41E+01	0*	-5.99E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6.90E+02	1.61E+02	1.11E+00	1.80E+00	5.11E+02	1.54E+01	-1.03E+01
Contribution to use of non renewable primary energy resources used as raw material	MJ	2.44E+00	2.44E+00	0*	0*	0*	0*	-4.74E-01
Contribution to total use of non-renewable primary energy resources	MJ	6.93E+02	1.63E+02	1.11E+00	1.80E+00	5.11E+02	1.54E+01	-1.08E+01
Contribution to use of secondary material	kg	3.30E-06	3.30E-06	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.16E-01	7.93E-02	1.08E-04	2.14E-03	3.25E-02	2.14E-03	-7.40E-03
Contribution to hazardous waste disposed	kg	2.63E+01	2.51E+01	0*	0*	9.60E-01	2.60E-01	-8.29E+00
Contribution to non hazardous waste disposed	kg	1.28E+01	6.71E+00	0*	5.62E-01	5.51E+00	4.92E-02	-2.18E+00
Contribution to radioactive waste disposed	kg	2.17E-03	1.85E-03	1.82E-05	7.61E-05	2.25E-04	2.88E-06	-2.22E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.80E-01	1.01E-03	0*	1.07E-01	0*	7.23E-02	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2308001_V1	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°		Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	2023/08/04	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.se.com](http://www.se.com)

ENVPEP2308001\_V1

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

2023/08/04

