
Product Environmental Profile

COIL MN 200/250VDC AC FOR FIXED MTZ





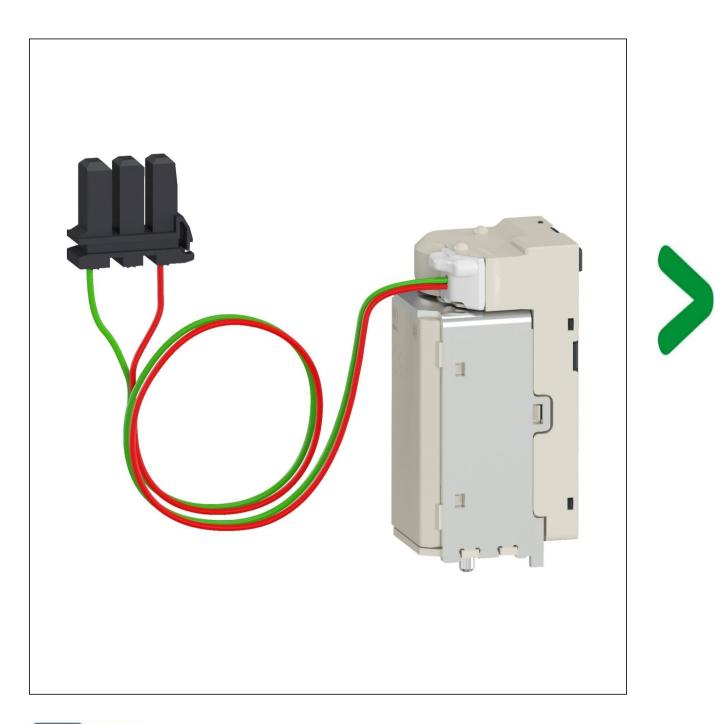

General information

| Reference product | COIL MN 200/250VDC AC FOR FIXED MTZ - LV847383 |
|----------------------------|--|
| Description of the product | The MN undervoltage release is an auxiliary device used as voltage release for emergency off or remote opening applications. The MN release instantaneously opens the circuit breaker when its supply voltage drops to a value below 35% of its rated voltage. |
| Functional unit | To trip the circuit breaker when the control voltage drops below 35% of its rated voltage. Between 35% and 70% of the rated voltage opening is possible but not ensured. This function is provided for 10 years. It complies with IEC 60947-2 standard. |

Constituent materials

Reference product mass 172 g including the product, its packaging and additional elements and accessories Various - 1.8% Cardboard - 6.9% Paper - 0.6% Electronic components - 9.6% PBT Polybutylene Terephtalate - 10.6% Stainless steel - 2%. Brass - 2.3% PA Polyamide - 4.4% UP Polyester - 1.6% **Diverse Thermosetting** Copper - 23.5% Plastics - 0.2% Steel - 36.5% **Plastics** 16,8% Metals 64,3%

Others 18,9%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

Additional environmental information

End Of Life

Recyclability potential:

69%

Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Environmental impacts

| Reference service life time | 10 years | | | | | |
|----------------------------------|---|---|---|---|--|--|
| Product category | Other equipments - Active product | | | | | |
| Installation elements | No special components needed | | | | | |
| Use scenario | COIL MN 200/250VDC AC FOR FIXED MTZ will be in Active phase 100 % of the time with 4.5 W power consumption during 10 years of lifetime. | | | | | |
| Technological representativeness | The modules of technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product. | | | | | |
| Geographical representativeness | Europe | | | | | |
| | [A1 - A3] | [A5] | [B6] | [C1 - C4] | | |
| Energy model used | Electricity Mix; Production mix; Low voltage; FR | Electricity Mix; Production mix; Low voltage; UE-27 | Electricity Mix; Production mix; Low voltage; UE-27 | Electricity Mix; Production mix; Low voltage; UE-27 | | |

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

| Mandatory Indicators | COIL MN 200/250VDC AC FOR FIXED MTZ - LV847383 | | | | | | | |
|--|--|----------|---------------|--------------|--------------|-----------|-------------|-----------------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life | Loads and Benefits |
| impact indicators | | lotai | [A1 - A3] | [A4] | [A5] | [B1 - B7] | [C1 - C4] | [D] |
| Contribution to climate change | kg CO2 eq | 1,74E+02 | 1,23E+01 | 2,25E-02 | 2,50E-02 | 1,62E+02 | 3,29E-01 | -3,95E-01 |
| Contribution to climate change-fossil | kg CO2 eq | 1,74E+02 | 1,23E+01 | 2,25E-02 | 2,39E-02 | 1,61E+02 | 3,19E-01 | -3,86E-01 |
| Contribution to climate change-biogenic | kg CO2 eq | 2,44E-01 | 1,69E-02 | 0* | 1,11E-03 | 2,16E-01 | 1,03E-02 | -8,48E-03 |
| Contribution to climate change-land use and land use change | kg CO2 eq | 1,58E-07 | 2,94E-09 | 0* | 1,08E-08 | 0* | 1,44E-07 | 0,00E+00 |
| Contribution to ozone depletion | kg CFC-11 eq | 2,32E-06 | 1,62E-06 | 0* | 1,70E-09 | 6,91E-07 | 7,61E-09 | -7,36E-08 |
| Contribution to acidification | mol H+ eq | 1,01E+00 | 8,54E-02 | 1,45E-04 | 0* | 9,22E-01 | 2,67E-03 | -8,71E-03 |
| Contribution to eutrophication, freshwater | kg (PO4)³- eq | 7,69E-04 | 1,90E-05 | 0* | 2,28E-07 | 4,42E-04 | 3,07E-04 | -8,11E-07 |
| Contribution to eutrophication marine | kg N eq | 1,14E-01 | 8,40E-03 | 6,79E-05 | 2,66E-05 | 1,05E-01 | 8,95E-04 | -2,81E-04 |
| Contribution to eutrophication, terrestrial | mol N eq | 1,67E+00 | 8,93E-02 | 7,45E-04 | 2,03E-04 | 1,57E+00 | 3,81E-03 | -3,24E-03 |
| Contribution to photochemical ozone formation - human health | kg COVNM eq | 3,68E-01 | 3,04E-02 | 1,88E-04 | 5,44E-05 | 3,36E-01 | 1,12E-03 | -1,49E-03 |
| Contribution to resource use, minerals and metals | kg Sb eq | 6,55E-04 | 6,34E-04 | 0* | 0* | 1,17E-05 | 8,63E-06 | -1,41E-04 |
| Contribution to resource use, fossils | MJ | 4,28E+03 | 1,43E+02 | 0* | 0* | 4,12E+03 | 1,65E+01 | -8,09E+00 |
| Contribution to water use | m3 eq | 1,97E+01 | 3,02E+00 | 0* | 1,33E-02 | 5,72E+00 | 1,10E+01 | -4,58E-01 |

Additional indicators for the French regulation are available as well

| Inventory flows Indicators | | | COIL MN 200/250VDC AC FOR FIXED MTZ - LV847383 | | | | | |
|---|-----------------|----------|--|--------------|--------------|-----------|-------------|-----------------------|
| Inventory flavor | Unit | Total | Manufact. | Distribution | Installation | Use | End of Life | Loads and Benefits |
| Inventory flows | Onit | Total | [A1 - A3] | [A4] | [A5] | [B1 - B7] | [C1 - C4] | [D] |
| Contribution to use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 7,96E+02 | 5,39E+00 | 0* | 0* | 7,90E+02 | 2,53E-01 | -1,74E-01 |
| Contribution to use of renewable primary energy resources used as raw material | MJ | 7,43E-02 | 7,43E-02 | 0* | 0* | 0* | 0* | -6,94E-02 |
| Contribution to total use of renewable primary energy resources | MJ | 7,96E+02 | 5,47E+00 | 0* | 0* | 7,90E+02 | 2,53E-01 | -2,43E-01 |
| Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material | ³ MJ | 4,28E+03 | 1,42E+02 | 0* | 0* | 4,12E+03 | 1,65E+01 | -8,00E+00 |
| Contribution to use of non renewable primary energy resources used as raw material | MJ | 9,18E-01 | 9,18E-01 | 0* | 0* | 0* | 0* | -9,17E-02 |
| Contribution to total use of non-renewable primary energy resources | MJ | 4,28E+03 | 1,43E+02 | 0* | 0* | 4,12E+03 | 1,65E+01 | -8,09E+00 |
| Contribution to use of secondary material | kg | 1,08E-02 | 1,08E-02 | 0* | 0* | 0* | 0* | 0,00E+00 |
| Contribution to use of renewable secondary fuels | MJ | 0,00E+00 | 0* | 0* | 0* | 0* | 0* | 0,00E+00 |
| Contribution to use of non renewable secondary fuels | MJ | 0,00E+00 | 0* | 0* | 0* | 0* | 0* | 0,00E+00 |
| Contribution to net use of freshwater | m³ | 4,90E-01 | 7,02E-02 | 0* | 3,11E-04 | 1,33E-01 | 2,86E-01 | -1,07E-02 |
| Contribution to hazardous waste disposed | kg | 2,43E+01 | 2,11E+01 | 0* | 0* | 3,02E+00 | 1,72E-01 | -1,19E+01 |
| Contribution to non hazardous waste disposed | kg | 2,63E+01 | 2,94E+00 | 0* | 8,02E-02 | 2,32E+01 | 9,24E-03 | -3,52E-01 |
| Contribution to radioactive waste disposed | kg | 6,46E-03 | 1,58E-03 | 0* | 1,09E-05 | 4,87E-03 | 1,40E-06 | -1,13E-04 |
| Contribution to components for reuse | kg | 0,00E+00 | 0* | 0* | 0* | 0* | 0* | 0,00E+00 |
| Contribution to materials for recycling | kg | 1,29E-01 | 0* | 0* | 1,54E-02 | 0* | 1,14E-01 | 0,00E+00 |
| Contribution to materials for energy recovery | kg | 0,00E+00 | 0* | 0* | 0* | 0* | 0* | 0,00E+00 |
| Contribution to exported energy | MJ | 0,00E+00 | 0* | 0* | 0* | 0* | 0* | 0,00E+00 |
| Contribution to biogenic carbon content of the product | kg de C | 0,00E+00 | 0* | 0* | 0* | 0* | 0* | 0,00E+00 |
| Contribution to biogenic carbon content of the associated packaging | kg de C | 0,00E+00 | 0* | 0* | 0* | 0* | 0* | 0,00E+00 |

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report

and on demand in a digital format - Country Customer Care Center - http://www.schneider-electric.com/contact

For all the impact indicators, The Use stage is the greatest contributor due to the energy losses occuring throughout the product reference service lifetime except the Climate change-Land use and land use change (GWPlu), Ozone depletion (ODP), Resource use, minerals and metals(ADPe) and Water Use(WU) stages. The manufacturing stage is the main contributor on Ozone depletion (ODP) and Resource use, minerals and metals(ADPe) stages. The End Of Life stage is the main contributor on Climate change-Land use and land use change (GWPlu) and Water Use(WU) stages.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| Registration number : | SCHN-01114-V01.01-EN | Drafting rules | PEP-PCR-ed4-2021 09 06 | | | |
|--|----------------------|-------------------------------------|-------------------------|--|--|--|
| Verifier accreditation N° | VH08 | Supplemented by | PSR-0005-ed2-2016 03 29 | | | |
| Date of issue | 112/2023 | Information and reference documents | www.pep-ecopassport.org | | | |
| | | Validity period | 5 years | | | |
| Independent verification of the declaration and data, in compliance with ISO 14025: 2010 | | | | | | |

The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)

PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025: 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Flectric Industries SAS Country Customer Care Center

http://www.se.com/contact 35, rue Joseph Monier

CS 30323

F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 928 298 512 €

www.se.com

Published by Schneider Electric SCHN-01114-V01.01-EN ©2023 - Schneider Electric - All rights reserved

12/2023