Product Environmental Profile

POWER SUPPLY UNIT








General information

Reference product	POWER SUPPLY UNIT - 1757301
Description of the product	The main puropse of the power supply unit is to supply power and communication signals to multiple connected devices.
Functional unit	The main function of the product is to control and regulate all the audio and video communication systems connected to the RITTO intercom system along with power supply with the following dimensions 71 mm x 134 mm x 226 mm, for the reference life time of 10years while protecting against the penetration of solid objects and liquids IP20 in accordance with the standard IEC 60529 and IEC 62368-1:2018 with following technical characteristics. - Rated operating voltage = 230V AC 50Hz - Rated operating voltage = 11 V AC 1.6 A load-free & 15-30 V DC 0.5 A

Constituent materials

Reference product mass 1003 g including the product, its packaging and additional elements and accessories

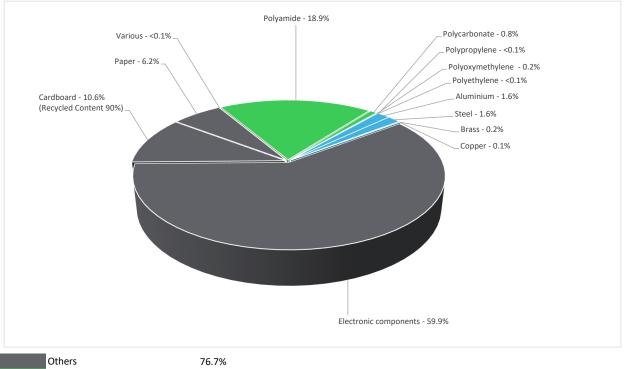

 Others
 76.7%

 Plastics
 19.9%

 Metals
 3.4%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website https://www.se.com/ww/en/work/support/green-premium/

(1) Additional environmental information

Recyclability potential:

4%

Recyclability potential:

4%

Recyclability rate has been calculated based on REECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).



Reference service life time	10 years						
Product category	Other equipments - Active product						
Installation elements	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.						
Use scenario	The product is in active mode for 20% of the time 13 W for the reference life time of 10 years.	The product is in active mode for 20% of the time with a power use of 34.5 W and in standby mode for 80% of the time with a power use of 13 W for the reference life time of 10 years.					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.						
Geographical representativeness	Germany (90%) Austria (10%)						
	[A1 - A3] [A5] [B6] [C1 - C4]						
Energy model used	Electricity Mix; Production mix; Low voltage; GE	Electricity Mix; Production mix; Low voltage; GE	Electricity Mix; Production mix; Low voltage; GE	Electricity Mix; Production mix; Low voltage; GE			
	Electricity with, Production mix, Low Voltage, GE	Electricity Mix; Production mix; Low voltage; AU	Electricity Mix; Production mix; Low voltage; AU	Electricity Mix; Production mix; Low voltage; AU			

Detailed results, including all the impact indicators mentioned in PCRed4, are available in the LCA report and on demand in a digital format. Country Customer Care Center - http://www.schneider-electric.com/contact

Mandatory Indicators				POWER S	SUPPLY UNIT - 17	757301		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	6.95E+02	8.60E+00	1.21E-01	2.91E-01	6.85E+02	1.40E+00	-4.39E-01
Contribution to climate change-fossil	kg CO2 eq	6.95E+02	8.52E+00	1.21E-01	2.78E-01	6.85E+02	1.34E+00	-4.27E-01
Contribution to climate change-biogenic	kg CO2 eq	5.11E-01	8.14E-02	0*	1.29E-02	3.62E-01	5.47E-02	-1.16E-02
Contribution to climate change-land use and land use change	ge kg CO2 eq	1.01E-08	8.35E-09	0*	0*	0*	1.77E-09	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	5.08E-06	1.47E-06	0*	1.93E-08	3.52E-06	7.10E-08	-4.70E-08
Contribution to acidification	mol H+ eq	5.16E+00	6.32E-02	7.68E-04	1.16E-03	5.07E+00	2.77E-02	-2.59E-03
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	8.21E-04	7.76E-05	0*	2.10E-06	7.19E-04	2.29E-05	-2.44E-06
Contribution to eutrophication marine	kg N eq	5.60E-01	6.98E-03	3.60E-04	3.06E-04	5.33E-01	1.99E-02	-3.41E-04
Contribution to eutrophication, terrestrial	mol N eq	8.17E+00	7.35E-02	3.95E-03	2.31E-03	8.08E+00	8.91E-03	-3.29E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.75E+00	2.67E-02	9.96E-04	6.17E-04	1.71E+00	3.75E-03	-1.00E-03
Contribution to resource use, minerals and metals	kg Sb eq	6.93E-04	6.51E-04	0*	0*	4.20E-05	1.30E-07	-1.99E-05
Contribution to resource use, fossils	MJ	1.33E+04	1.53E+02	1.69E+00	3.03E+00	1.32E+04	1.40E+01	-5.65E+00
Contribution to water use	m3 eq	3.86E+02	1.16E+00	0*	1.24E-01	2.78E+01	3.56E+02	-1.65E-01

Inventory flows Indicators			POWER SUPPLY UNIT - 1757301					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.80E+03	2.08E+00	0*	0*	3.80E+03	1.55E+00	5.88E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	1.25E+00	1.25E+00	0*	0*	0*	0*	-1.23E+00
Contribution to total use of renewable primary energy resources	MJ	3.80E+03	3.33E+00	0*	0*	3.80E+03	1.55E+00	-6.39E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.33E+04	1.43E+02	1.69E+00	3.03E+00	1.32E+04	1.40E+01	-5.65E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	9.51E+00	9.51E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	1.33E+04	1.53E+02	1.69E+00	3.03E+00	1.32E+04	1.40E+01	-5.65E+00
Contribution to use of secondary material	kg	1.01E-01	1.01E-01	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.00E+01	2.70E-02	0*	2.89E-03	6.48E-01	9.33E+00	-3.84E-03
Contribution to hazardous waste disposed	kg	2.38E+01	3.94E+00	0*	3.44E-03	1.90E+01	8.06E-01	-1.59E+00
Contribution to non hazardous waste disposed	kg	1.13E+02	3.03E+00	0*	9.47E-01	1.08E+02	2.10E-01	-2.18E+00
Contribution to radioactive waste disposed	kg	1.15E-02	6.04E-03	3.03E-06	1.27E-04	5.31E-03	1.25E-05	-3.95E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	2.17E-01	2.48E-02	0*	1.60E-01	0*	3.18E-02	0.00E+00
Contribution to materials for energy recovery	kg	3.43E-09	3.43E-09	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version 5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, are available in the LCA report and on demand in a digital format.

Country Customer Care Center - http://www.schneider-electric.com/contact

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2402009_V1	Drafting rules	PEP-PCR-ed4-2021 09 06				
Validity period	5 years	Supplemented by	PSR-0005-ed3-EN-2023 06 06				
Date of issue	04/2024	Information and reference documents	www.pep-ecopassport.org				
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016							
Internal X External							
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)							
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019							
The elements of the present PEP cannot be compared with elements from another program.							
Document in compliance with ISO 14021 : 2016 « Environmental labels and declarations. Type II environmental declarations »							

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439

Capital social 928 298 512 €

www.se.com

Published by Schneider Electric

ENVPEP2402009_V1 ©2023 - Schneider Electric - All rights reserved

04/2024