

Modbus Integration

Integration for Modbus Functionality for SER8300 Series

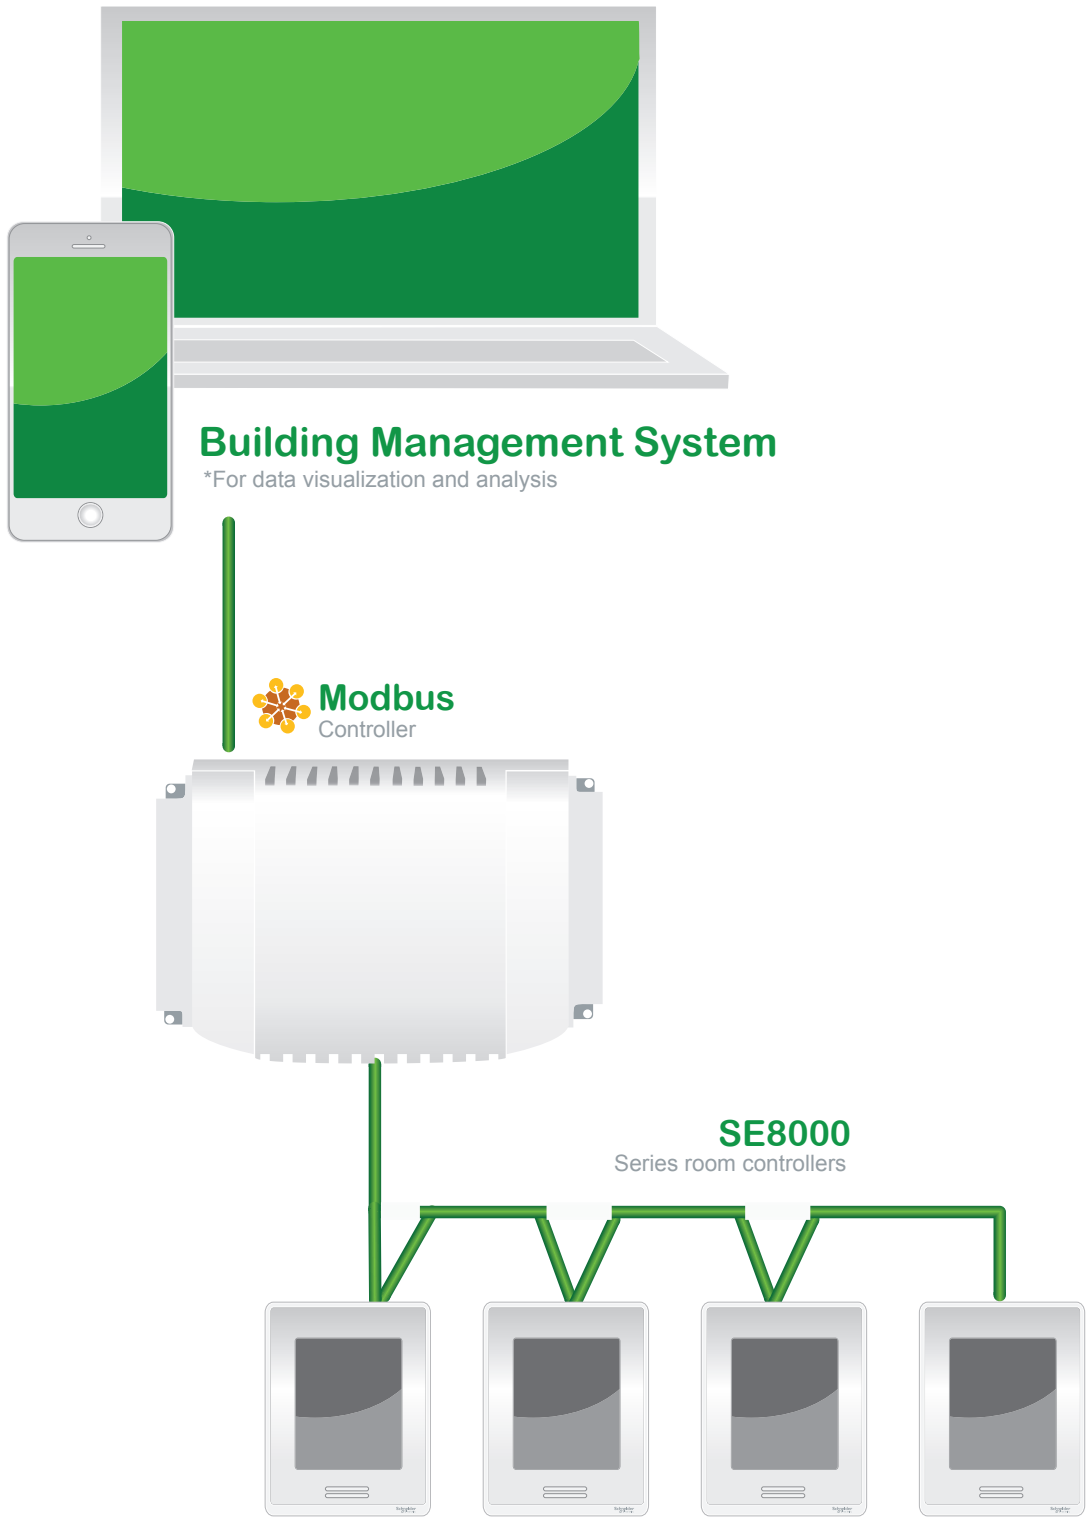


TABLE OF CONTENTS

Introduction	2
Configuration and Mapping	3
General Modbus Functions	4
1000+ Modbus Address Functions	5
3000+ Modbus Address Functions	6
4000+ Modbus Address Functions	10
5000+ Modbus Address Functions	19

INTRODUCTION

Modbus is an application-layer messaging protocol which is independent of the physical network layer. A Modbus serial line can be integrated into Modbus TCP networks, using simple gateways.

SER8300 SERIES MODBUS SPECIFICATIONS

The SER8300 Series Room Controller acts as a Modbus slave by using its RS485 port. As BACnet and Modbus use the same RS485 port, a setup menu allows switching between the two protocols.

MODBUS SPECIFIC READ-ONLY POINTS

The below points serve to identify the version Numbers for all SER8300 Series Room Controllers.

Modbus point type	Description	Modbus functions available	Modbus Register	Modbus Address
16-bit Input	Hardware Revision	4	9001	39001
16-bit Input	Software Version Major	4	9002	39002
16-bit Input	Software Version Minor	4	9003	39003
16-bit Input	Software Version Revision	4	9004	39004
16-bit Input	Software Version Build	4	9005	39005
16-bit Input	Model Number	4	9006	39006

CONFIGURATION

1/1 Modbus network

COM address	254
Network units	SI
Baud rate	19200
Parity	None

↶
↷
🏠
⏴
⏵

- Modbus ID is the same as already defined in COM address for BACnet & ZigBee
- Network units can be changed to SI or Imperial
- The baudrate can be: 4800 / 9600 / 19200 / 38400 / 57600
- The data bits are always 8
- The parity can be: none, odd or even. In case of parity odd or even, 1 stop bit is used, otherwise 2 stop bits are used

Configuration Parameters Default Value	Significance and Adjustments
Comm address Room Controller networking address Default value: 254 Range: 0 to 254	Communication Address Default value of 254 disables Modbus communication for the Room Controller.
Network units Default value: Imperial	Measurement Units Imperial: network units shown as Imperial units. SI: network units shown as International Metric units.
Baud rate Default value: Auto	Baud Rate Auto: automatically detects baud rate. Other choices: (115200, 76800, 57600, 38400, 19200, and 9600).
Parity Default value: None	Parity Parity checking of the data character frame (Even, Odd, or no parity (None)).

MAPPING

The mapping is directly based on database IDs.

The correspondence is the following:

function 1, register 1 (Modbus addr 1)	<=> DB id 0x6000 (BOs)
function 1/5, register 5001 (Modbus addr 5001)	<=> DB id 0x4000 (BVs)
function 2, register 1 (Modbus addr 10001)	<=> DB id 0x5000 (BIs)
function 4, register 1 (Modbus addr 30001)	<=> DB id 0x3000 (AHVs)
function 4, register 1001 (Modbus addr 31001)	<=> DB id 0x7000 (AIs)
function 4, register 5001 (Modbus addr 35001)	<=> DB id 0xC000 (MSIs)
function 3/6, register 1 (Modbus addr 40001)	<=> DB id 0x1000 (MVs)
function 3/6, register 4001 (Modbus addr 44001)	<=> DB id 0x2000 (AVs)
function 3, register 8001 (Modbus addr 48001)	<=> DB id 0x8000 (AOs)
function 3, register 9001 (Modbus addr 49001)	<=> DB id 0x9000 (AHOs)

A special range of addresses is used to identify the device: function 4, register 9001 (Modbus addr 39001)

GENERAL MODBUS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Cooling Output	1	1	0	1	0	1	0=Off, 1=On
Heating Output	2	2	1	1	0	1	0=Off, 1=On
High Speed Fan Output	3	3	2	1	0	1	0=Off, 1=On
Medium Speed Fan Output	4	4	3	1	0	1	0=Off, 1=On
Low Speed Fan Output	5	5	4	1	0	1	0=Off, 1=On

1000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
BI1 Binary Input	1	10001	0	2	0	1	0=Activated, 1=Not activ.
BI2 Binary Input	2	10002	1	2	0	1	0=Activated, 1=Not activ.
RUI1 Binary Input	3	10003	2	2	0	1	0=Activated, 1=Not activ.
RBI2 Binary Input	4	10004	3	2	0	1	0=Activated, 1=Not activ.

3000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Room Temperature	1	30001	0	4	-40	122	Fahrenheit
Outdoor Temperature	2	30002	1	4	-40	150	Fahrenheit
UI22 Supply Temperature	3	30003	2	4	-40	122	Fahrenheit
Room Humidity	4	30004	3	4	0	100	%RH
UI19 Changeover Temperature	5	30005	4	4	-40	150	Fahrenheit
CO ₂ Level	7	30007	5	4	0	5000	ppm
Light Sensor Level	1002	31002	1	4	0	30000	---
Wireless Device 1 - Address	1011	31011	4	4	-32768	32767	---
Wireless Device 2 - Address	1012	31012	5	4	-32768	32767	---
Wireless Device 3 - Address	1013	31013	6	4	-32768	32767	---
Wireless Device 4 - Address	1014	31014	7	4	-32768	32767	---
Wireless Device 5 - Address	1015	31015	8	4	-32768	32767	---
Wireless Device 6 - Address	1016	31016	9	4	-32768	32767	---
Wireless Device 7 - Address	1017	31017	10	4	-32768	32767	---
Wireless Device 8 - Address	1018	31018	11	4	-32768	32767	---
Wireless Device 9 - Address	1019	31019	12	4	-32768	32767	---
Wireless Device 10 - Address	1020	31020	13	4	-32768	32767	---
Wireless IO 1 IEEE Address	1021	31021	14	4	-32768	32767	---
Wireless IO 2 IEEE Address	1022	31022	15	4	-32768	32767	---
Wireless IO 3 IEEE Address	1023	31023	16	4	-32768	32767	---
Paired Wireless IO	1024	31024	17	4	0	3	---

3000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Wireless Green Power - Address	1025	31025	18	4	-32768	32767	---
Wireless Device 1 - Temperature	1026	31026	19	4	-40	122	Fahrenheit
Wireless Device 2 - Temperature	1027	31027	20	4	-40	122	Fahrenheit
Wireless Device 3 - Temperature	1028	31028	21	4	-40	122	Fahrenheit
Wireless Device 4 - Temperature	1029	31029	22	4	-40	122	Fahrenheit
Wireless Device 5 - Temperature	1030	31030	23	4	-40	122	Fahrenheit
Wireless Device 6 - Temperature	1031	31031	24	4	-40	122	Fahrenheit
Wireless Device 7 - Temperature	1032	31032	25	4	-40	122	Fahrenheit
Wireless Device 8 - Temperature	1033	31033	26	4	-40	122	Fahrenheit
Wireless Device 9 - Temperature	1034	31034	27	4	-40	122	Fahrenheit
Wireless Device 10 - Temperature	1035	31035	28	4	-40	122	Fahrenheit
Wireless IO Temperature	1036	31036	29	4	-40	185	
Wireless Green Power - Temperature	1037	31037	30	4	-40	185	Fahrenheit
Remote relative humidity	1038	31038	31	4	0	100	%RH
Paired ZigBee Devices	1041	31041	34	4	0	11	---
Effective Occupancy	5001	35001	0	4	0	3	0=Occupied, 1=Unoccupied, 2=Override, 3=Standby
ZigBee Network Status	5003	35003	2	4	0	4	0=Not det., 1=Pwr on, 2=No NWK, 3=Joined, 4=Online
Weekday	5005	35005	4	4	0	6	0=Monday, 1=Tuesday, 2=Wednesday, 3=Thursday, 4=Friday, 5=Saturday, 6=Sunday
Program Status	5006	35006	5	4	0	5	0=Idle, 1=Loading, 2=Running, 3=Waiting, 4=Halted, 5=Unloading
Program Error	5007	35007	6	4	0	5	0=No error, 1=Yield, 2=Runtime, 3=Syntax, 4=Memory, 5=Double err

3000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Wireless Device 1 - Status	5008	35008	7	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 2 - Status	5009	35009	8	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 3 - Status	5010	35010	9	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 4 - Status	5011	35011	10	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 5 - Status	5012	35012	11	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 6 - Status	5013	35013	12	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 7 - Status	5014	35014	13	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 8 - Status	5015	35015	14	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 9 - Status	5016	35016	15	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 10 - Status	5017	35017	16	4	0	6	0=None, 1=Closed, 2=Opened, 3=No motion, 4=Motion, 5=Normal, 6=Leak
Wireless Device 1 - Battery	5018	35018	17	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 2 - Battery	5019	35019	18	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 3 - Battery	5020	35020	19	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 4 - Battery	5021	35021	20	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 5 - Battery	5022	35022	21	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 6 - Battery	5023	35023	22	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 7 - Battery	5024	35024	23	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 8 - Battery	5025	35025	24	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 9 - Battery	5026	35026	25	4	0	2	0=None, 1=Normal, 2=Low
Wireless Device 10 - Battery	5027	35027	26	4	0	2	0=None, 1=Normal, 2=Low

3000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Wireless Device 1 - Communication Status	5028	35028	27	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 2 - Communication Status	5029	35029	28	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 3 - Communication Status	5030	35030	29	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 4 - Communication Status	5031	35031	30	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 5 - Communication Status	5032	35032	31	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 6 - Communication Status	5033	35033	32	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 7 - Communication Status	5034	35034	33	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 8 - Communication Status	5035	35035	34	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 9 - Communication Status	5036	35036	35	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless Device 10 - Communication Status	5037	35037	36	4	0	3	0=Not paired, 1=Online, 2=Invalid, 3=Offline
Wireless IO 1 Status	5038	35038	37	4	0	2	0=Offline, 1=Online, 2=Busy
Wireless IO 2 Status	5039	35039	38	4	0	2	0=Offline, 1=Online, 2=Busy
Wireless IO 3 Status	5040	35040	39	4	0	2	0=Offline, 1=Online, 2=Busy
Wireless IO 1 Remove	5041	35041	40	4	0	1	0=No, 1=Yes
Wireless IO 2 Remove	5042	35042	41	4	0	1	0=No, 1=Yes
Wireless IO 3 Remove	5043	35043	42	4	0	1	0=No, 1=Yes
Wireless Green Power - Communication Status	5045	35045	44	4	0	4	0=Not paired, 1=Online, 2=Invalid, 3=Offline, 4=Paired
Wireless Green Power - Battery	5046	35046	45	4	0	2	0=None, 1=Normal, 2=Low
Wireless Green Power - Remove	5047	35047	46	4	0	1	0=No, 1=Yes
Effective temperature sensor	5048	35048	47	4	0	13	0=Wired, 1=Internal, 2=WL IO, 3= WL 1, 4=WL 2, 5=WL 3, 6=WL 4, 7=WL 5, 8=WL 6, 9=WL 7, 10=WL 8, 11=WL 9, 12=WL 10, 13=WL GP
Effective relative humidity sensor	5049	35049	48	4	0	12	0=None, 1=Internal, 2=WL 1, 3= WL 2, 4=WL 3, 5=WL 4, 6=WL 5, 7=WL 6, 8=WL 7, 9=WL 8, 10=WL 9, 11=WL 10, 12=WL GP

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Temperature Scale	1	40001	0	3,6	0	1	0= °C, 1=°F
Display Language	2	40002	1	3,6	0	20	0=English, 1=French, 2=Spanish, 3=Chinese, 4=Russian, 5=Arabic, 6=Bulgarian, 7=Czech, 8=Danish, 9=Dutch, 10=Finnish, 11=German, 12=Hungarian, 13=Indones, 14=Italian, 15=Norwegian, 16=polish, 17=Portug., 18=Slovak, 19=Swedish, 20=Turkish
Fan Mode	3	40003	2	3,6	0	4	0=Low, 1=Med, 2=High, 3=Auto, 4=On
System Mode	4	40004	3	3,6	0	3	0=Off, 1=Auto, 2=Cool, 3=Heat
RB12 Configuration	5	40005	5	3,6	0	2	0=None, 1=Filter, 2=Service
Auto Mode Enable	6	40006	6	3,6	0	1	0=Disabled, 1=Enabled
Heating Valve	7	40007	7	3,6	0	1	0=NO, 1=NC
BI1 Configuration	8	40008	8	3,6	0	4	0=None, 1=Rem NSB, 2=Motion NO, 3=Motion, NC, 4=Window
BI2 Configuration	9	40009	9	3,6	0	2	0=None, 1=Door dry, 2=Override
Room Humidity Display	10	40010	10	3,6	0	1	0=Disabled, 1=Enabled
Cooling Valve	11	40011	11	3,6	0	1	0=NO, 1=NC
Dehumidification Lockout	12	40012	12	3,6	0	1	0=Disabled, 1=Enabled
RUI1 Configuration	13	40013	13	3,6	0	5	0=None, 1=Filter, 2=Service, 3=COC/NH, 4=COC/NC, 5=COS
Pulsed Heating	15	40015	15	3,6	0	2	0=Off, 1=On, 2=Occ out
Fan Sequence	16	40016	16	3,6	0	4	0=L-M-H, 1=L-H, 2=L-M-H-A, 3=L-H-A, 4=On-Auto
Setpoint Function	17	40017	17	3,6	0	1	0=Dual SP, 1=Attach SP
Auto Mode Fan Function	18	40018	18	3,6	0	1	0=AS, 1=AS/AD
Fan Control in Heating Mode	19	40019	19	3,6	0	2	0=On, 1=Off-Auto, 2=Off-all
Sequence of Operation	20	40020	4	3,6	0	3	0=Cool only, 1=Heat only, 2=Cool/Heat, 3=Heat-Rht, 4=Reheat
Occupancy Command	22	40022	20	3,6	0	2	0=Loc. occ., 1=Occupied, 2=Unocc.
Network Units	23	40023	22	3,6	0	1	0=SI, 1=Imperial
No Activity Sleep Mode Time	26	40026	25	3,6	0	1	0=Disabled, 1=Enabled
Time Format	27	40027	26	3,6	0	1	0=AM-PM, 1=24-Hours

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Standby Mode Configuration	28	40028	27	3,6	0	1	0=Absolute, 1=Offset
HMI Color	29	40029	28	3,6	0	4	0=White, 1=Green, 2=Blue, 3=Grey, 4=Dark grey
Main Display	30	40030	29	3,6	0	1	0=Temp., 1=Setpoint
Long Message Background Colour	31	40031	30	3,6	0	6	0=White, 1=Green, 2=Blue, 3=Grey, 4=Dark grey, 5=Default, 6=Red
Use Standby Screen	32	40032	31	3,6	0	3	0=No, 1=Yes, 2=Occ. only, 3=Screen sav
Enable Smart Recovery	51	40051	33	3,6	0	1	0=Off, 1=On
Schedule Menu	54	40054	34	3,6	0	3	0=Disabled, 1=Enabled, 2=Dis.no.clk, 3=En.no.clk
French	56	40056	36	3,6	0	1	0=Disabled, 1=Enabled
Spanish	57	40057	37	3,6	0	1	0=Disabled, 1=Enabled
Chinese	58	40058	38	3,6	0	1	0=Disabled, 1=Enabled
Russian	59	40059	39	3,6	0	1	0=Disabled, 1=Enabled
Month	60	40060	40	3,6	0	11	0=Jan., 1=Feb., 2=Mar., 3=Apr., 4=May, 5=June, 6=July, 7=Aug., 8=Sept., 9=Oct., 10=Nov., 11=Dec.

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Wireless Device 1 - Function	66	40066	43	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 2 - Function	67	40067	44	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 3 - Function	68	40068	45	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 4 - Function	69	40069	46	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 5 - Function	70	40070	47	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 6 - Function	71	40071	48	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 7 - Function	72	40072	49	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 8 - Function	73	40073	50	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 9 - Function	74	40074	51	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Wireless Device 10 - Function	75	40075	52	3,6	0	6	0=None, 1=Window, 2=Door, 3=Motion, 4=Status, 5=Remove, 6=Water
Occupancy Source	77	40077	54	3,6	0	1	0=Motion, 1=Schedule
Mode Button	78	40078	55	3,6	0	1	0=Disabled, 1=Enabled
Control Status	79	40079	56	3	0	2	0=Off, 1=Cool, 2=Heat
Custom button icon	81	40081	58	3,6	0	16	0=Default Button, 1=No Button, 2=System Mode Heat/Cool, 3=System Mode On/Off, 4=Fan Mode, 5=Override Button, 6=Units Button, 7=Help Button, 8=Language Button, 9=Schedule Button, 10=Lighting Button, 11=Blind Button, 12=Lamp Button, 13=Energy Button, 14=make Room Button, 15=Setting Button, 16=Timer Button
Custom button behavior	82	40082	59	3,6	0	11	0=Default function, 1=No function, 2=System mode function, 3=Fan function, 4=Override function, 5=Schedule function, 6=Units function, 7=Help function, 8=Language function, 9=Configuration function, 10=Custom function, 11=Standby function,
Arabic	83	40083	60	3,6	0	1	0=Disabled, 1=Enabled
Czech	85	40085	62	3,6	0	1	0=Disabled, 1=Enabled
Danish	86	40086	63	3,6	0	1	0=Disabled, 1=Enabled
Dutch	87	40087	64	3,6	0	1	0=Disabled, 1=Enabled
Finnish	88	40088	65	3,6	0	1	0=Disabled, 1=Enabled
German	89	40089	66	3,6	0	1	0=Disabled, 1=Enabled

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Hungarian	90	40090	67	3,6	0	1	0=Disabled, 1=Enabled
Indonesian	91	40091	68	3,6	0	1	0=Disabled, 1=Enabled
Italian	92	40092	69	3,6	0	1	0=Disabled, 1=Enabled
Norwegian	93	40093	70	3,6	0	1	0=Disabled, 1=Enabled
Polish	94	40094	71	3,6	0	1	0=Disabled, 1=Enabled
Portuguese	95	40095	72	3,6	0	1	0=Disabled, 1=Enabled
Slovak	96	40096	73	3,6	0	1	0=Disabled, 1=Enabled
Swedish	97	40097	74	3,6	0	1	0=Disabled, 1=Enabled
Turkish	98	40098	75	3,6	0	1	0=Disabled, 1=Enabled
Modbus Baud Rate	105	40105	78	3,6	0	4	0=4800, 1=9600, 2=19200, 3=38400, 4=57600
Modbus Parity Bit	106	40106	79	3,6	0	2	0=None, 1=Odd, 2=Even
Schedule Type	107	40107	80	3,6	0	2	0=7 days, 1= 5+2 days, 2=5+1+1 days
Room Temperature Sensor	116	40116	82	3,6	0	13	0=Wired, 1=Internal, 2= WL IO, 3=WL 1, 4=WL 2, 5=WL 3, 6=WL 4, 7=WL 5, 8=WL 6, 9=WL 7, 10=WL 8, 11=WL 9, 12=WL 10, 13=WL GP
CO ₂ Display	118	40118	84	3,6	0	1	0=Disabled, 1=Enabled
CO ₂ Auto calibration	119	40119	85	3,6	0	1	0=Disabled, 1=Enabled
Lock Screen	120	40120	86	3,6	0	1	0=No, 1=Yes
Relative humidity sensor	121	40121	87	3,6	0	12	0=None, 1=Internal, 2=WL 1, 3=WL 2, 4=WL 3, 5= WL 4, 6= WL 5, 7= WL 6, 8= WL 7, 9= WL 8, 10= WL 9, 11= WL 10, 12= WL GP
Temperature Alarm Enabled	123	40123	89	3,6	0	1	0=Off, 1=On
ADR Permission	124	40124	90	3,6	0	1	0=Off, 1=On
Wireless Device GP - Function	125	40125	91	3,6	0	2	0=Remove, 1=None, 2=T

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Occupied Cool Setpoint	4001	44001	0	3,6	54	100	°F
Occupied Heat Setpoint	4002	44002	1	3,6	40	90	°F
Unoccupied Cool Setpoint	4003	44003	2	3,6	54	100	°F
Unoccupied Heat Setpoint	4004	44004	3	3,6	40	90	°F
Heating Setpoint Limit	4005	44005	4	3,6	40	90	°F
Cooling Setpoint Limit	4006	44006	5	3,6	54	100	°F
Calibrate Room Temperature Sensor	4007	44007	6	3,6	-5	5	°F
Standby Cool Setpoint	4009	44009	8	3,6	54	100	°F
Standby Heat Setpoint	4010	44010	9	3,6	40	90	°F
Dehumidification Max Cooling Limit	4011	44011	10	3,6	20	100	%RH
Dehumidification Setpoint	4012	44012	11	3,6	30	95	%RH
Calibrate Humidity Sensor	4013	44013	12	3,6	-15	15	%RH
Dehumidification Hysteresis	4015	44015	14	3,6	2	20	%RH
Main Password	4017	44017	16	3,6	0	9999	---
COM Address	4018	44018	17	3,6	0	254	---
Model Number	4019	44019	18	3	143	146	---
Minimum Deadband	4020	44020	19	3,6	2	5	°F
Heating CPH	4021	44021	20	3,6	3	8	---
Cooling CPH	4022	44022	21	3,6	3	8	---

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Number of Pipes	4025	44025	26	3,6	2	4	---
Unoccupied Time	4026	44026	22	3,6	0	24	Hours
Temporary Occupancy Time	4027	44027	23	3,6	0	24	Hours
Standby Time	4028	44028	24	3,6	5	24	Hours
Proportional Band	4029	44029	25	3,6	3	10	---
Cooling Demand Limit	4030	44030	29	3,6	0	100	%
Heating Demand Limit	4031	44031	30	3,6	0	100	%
Low Backlight	4033	44033	32	3,6	0	100	%
Night Backlight	4034	44034	33	3,6	0	100	%
Purge Sample Period	4036	44036	35	3,6	0	4	Hours
Purge Open	4037	44037	36	3,6	1	3	Minutes
Standby Temperature Differential	4038	44038	37	3,6	1	5	°F
User Password	4039	44039	38	3,6	0	9999	---
User HMI	4042	44042	41	3,6	0	12	---
Default Heating Setpoint	4043	44043	42	3,6	65	80	°F
Occupied 1	4059	44059	44	3,6	0	1440	---
Unoccupied 1	4060	44060	45	3,6	0	1440	---
Occupied 2	4061	44061	46	3,6	0	1440	---
Unoccupied 2	4062	44062	47	3,6	0	1440	---

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Occupied 3	4063	44063	48	3,6	0	1440	---
Unoccupied 3	4064	44064	49	3,6	0	1440	---
Occupied 1	4065	44065	50	3,6	0	1440	---
Unoccupied 1	4066	44066	51	3,6	0	1440	---
Occupied 2	4067	44067	52	3,6	0	1440	---
Unoccupied 2	4068	44068	53	3,6	0	1440	---
Occupied 3	4069	44069	54	3,6	0	1440	---
Unoccupied 3	4070	44070	55	3,6	0	1440	---
Occupied 1	4071	44071	56	3,6	0	1440	---
Unoccupied 1	4072	44072	57	3,6	0	1440	---
Occupied 2	4073	44073	58	3,6	0	1440	---
Unoccupied 2	4074	44074	59	3,6	0	1440	---
Occupied 3	4075	44075	60	3,6	0	1440	---
Unoccupied 3	4076	44076	61	3,6	0	1440	---
Occupied 1	4077	44077	62	3,6	0	1440	---
Unoccupied 1	4078	44078	63	3,6	0	1440	---
Occupied 2	4079	44079	64	3,6	0	1440	---
Unoccupied 2	4080	44080	65	3,6	0	1440	---
Occupied 3	4081	44081	66	3,6	0	1440	---
Unoccupied 3	4082	44082	67	3,6	0	1440	---

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Occupied 1	4083	44083	68	3,6	0	1440	---
Unoccupied 1	4084	44084	69	3,6	0	1440	---
Occupied 2	4085	44085	70	3,6	0	1440	---
Unoccupied 2	4086	44086	71	3,6	0	1440	---
Occupied 3	4087	44087	72	3,6	0	1440	---
Unoccupied 3	4088	44088	73	3,6	0	1440	---
Occupied 1	4089	44089	74	3,6	0	1440	---
Unoccupied 1	4090	44090	75	3,6	0	1440	---
Occupied 2	4091	44091	76	3,6	0	1440	---
Unoccupied 2	4092	44092	77	3,6	0	1440	---
Occupied 3	4093	44093	78	3,6	0	1440	---
Unoccupied 3	4094	44094	79	3,6	0	1440	---
Occupied 1	4095	44095	80	3,6	0	1440	---
Unoccupied 1	4096	44096	81	3,6	0	1440	---
Occupied 2	4097	44097	82	3,6	0	1440	---
Unoccupied 2	4098	44098	83	3,6	0	1440	---
Occupied 3	4099	44099	84	3,6	0	1440	---
Unoccupied 3	4100	44100	85	3,6	0	1440	---
Time	4110	44110	86	3,6	0	1439	---
Year	4111	44111	87	3,6	2000	2100	---
Day	4112	44112	88	3,6	1	31	---

4000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Lua Parameter A (AV25)	4117	44117	93	3,6	-32768	32767	---
Lua Parameter B (AV26)	4118	44118	94	3,6	-32768	32767	---
Lua Parameter C (AV27)	4119	44119	95	3,6	-32768	32767	---
Lua Parameter D (AV28)	4120	44120	96	3,6	-32768	32767	---
Lua Parameter E (AV29)	4121	44121	97	3,6	-32768	32767	---
Lua Parameter F (AV30)	4122	44122	98	3,6	-32768	32767	---
Hardware Revision	4123	44123	99	3	1	5	---
Keyboard Value	4126	44126	102	3,6	0	35	---
Input Source	4139	44139	104	3,6	0	3	---
Temperature Alarm Threshold	4143	44143	106	3,6	32	45	°F
Temperature Alarm Hysteresis	4144	44144	107	3,6	0	10	°F
Load Shedding Offset	4145	44145	108	3,6	4	10	°F
PI Heating Demand	8001	48001	0	3	0	100	%
PI Cooling Demand	8002	48002	1	3	0	100	%
Pulsed Heating Demand	8001	49003	2	3	0	100	Voltage
UO12 Analog Output	9002	49002	0	3	0	10	Voltage

5000+ MODBUS ADDRESS FUNCTIONS

Object Name	Modbus Register	Modbus Address	Index	Function Code	Low Limit	High Limit	Description ***
Filter Alarm	5001	5001	0	1	0	1	0=Off, 1=On
Service Alarm	5002	5002	1	1	0	1	0=Off, 1=On
Window Alarm	5003	5003	2	1	0	1	0=Off, 1=On
PIR Local Motion	5004	5004	3	1	0	1	0=No motion, 1=Motion
Dehumidification Status	5005	5005	4	1	0	1	0=Off, 1=On
Low Battery Alarm	5006	5006	5	1,5	0	1	0=Off, 1=On
Window Contact Installed	5007	5007	6	1,5	0	1	0=No, 1=Yes
Window Contact Status	5008	5008	7	1,5	0	1	0=Closed, 1=Open
Door Contact Installed	5009	5009	8	1,5	0	1	0=No, 1=Yes
Door Contact Status	5010	5010	9	1,5	0	1	0=Closed, 1=Open
Display Long Screen Message	5011	5011	10	1,5	0	1	0=Off, 1=On
Force High Backlight	5012	5012	11	1,5	0	1	0=Off, 1=On
Smart Recovery Status	5014	5014	12	1	0	1	0=Off, 1=On
Exception Status	5015	5015	13	1	0	1	0=Off, 1=On
ZigBee PIR Sensor Installed	5019	5019	14	1,5	0	1	0=Off, 1=On
ZigBee Sensor Motion	5020	5020	15	1,5	0	1	0=No motion, 1=Motion
Clock Alarm	5021	5021	16	1	0	1	0=Off, 1=On
Water Leak	5024	5024	19	1,5	0	1	0=Off, 1=On
Water Leak Sensor Installed	5025	5025	20	1,5	0	1	0=No, 1=Yes
Water leak Sensor Status	5026	5026	21	1,5	0	1	0=Normal, 1=Leak
Low Temperature	5027	5027	22	1,5	0	1	0=Off, 1=On
Load Shedding Demand	5028	5028	23	1,5	0	1	0=Off, 1=On
Load Shedding Status	5029	5029	24	1,5	0	1	0=Off, 1=On
Load Shedding Override	5030	5030	25	1,5	0	1	0=Off, 1=On

Technical Support

For any issues with SmartStruxure Solution or SmartStruxure Lite, contact Schneider Electric Technical Support according to your region.

Americas

+1-(978)-975-9508: Andover, MA, USA, 8:30am - 5:00pm (EST)
+1-(800)-830-1274: Carrollton, TX, USA, 8:00am - 5:00pm (CST)
+1-(888)-444-1311: Rockford, IL, USA, 8:00am - 5:00pm (CST)

Europe

+44-1628-741-147: London, England, UK, 8:00am - 4:30pm (GMT)
+46-40-38-69-00: Malmö, Sweden, 8:00am - 4:15pm (CET/CEST)

Asia Pacific

Contact Technical Support at <https://ecobuilding.schneider-electric.com/support>

Schneider Electric is the global specialist in energy management and automation. With revenues of 25 billion in FY2014, our 170,000 employees serve customers in over 100 countries, helping them to manage their energy and process in ways that are safe, reliable, efficient and sustainable. From the simplest of switches to complex operational systems, our technology, software and services improve the way our customers manage and automate their operations. Our connected technologies will reshape industries, transform cities and enrich lives.

At Schneider Electric, we call this **Life Is On.**