


# Product Environmental Profile

EasyLogic thermostat, 4 Pipe 3 Speed modulating, standalone, 24Vac

Easylogic

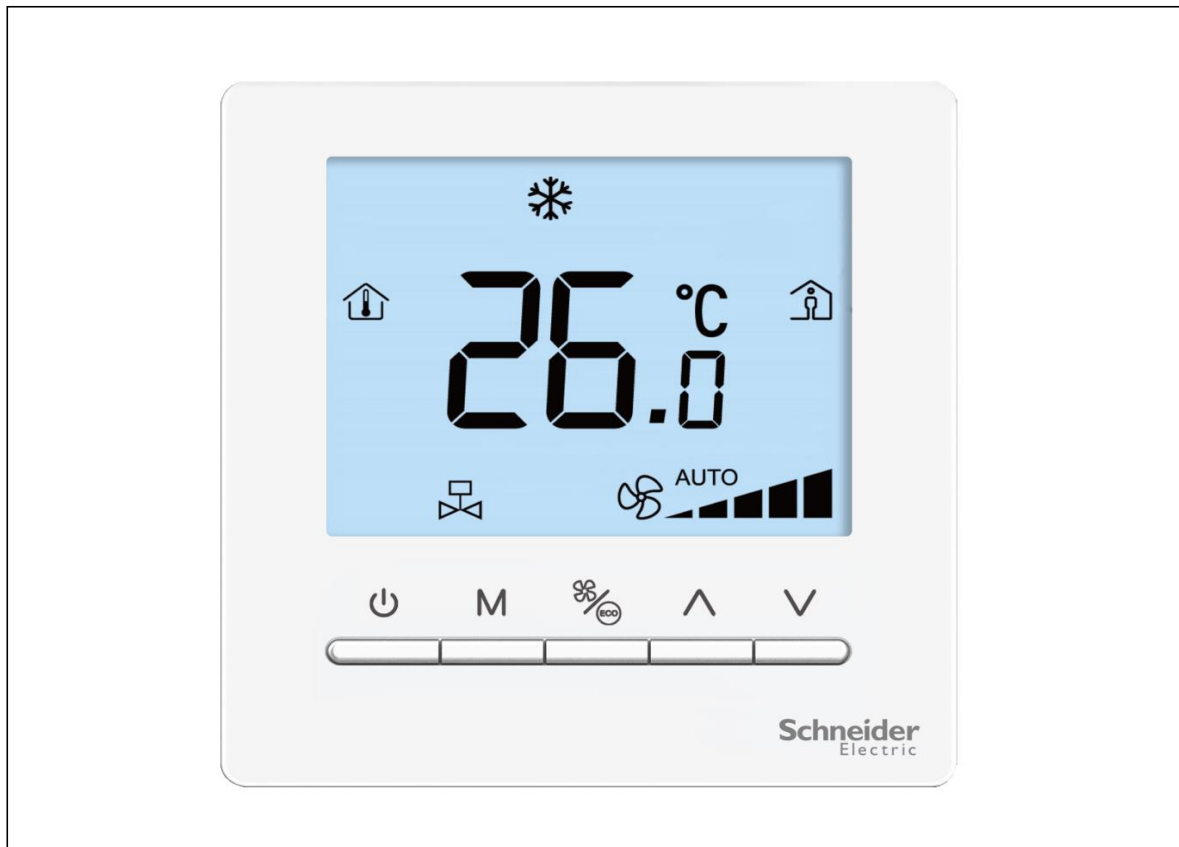


## General information

Reference product	EasyLogic thermostat, 4 Pipe 3 Speed modulating, standalone, 24Vac - TC700-3A4PXX-24
Description of the product	This product is a thermostat that controls the opening and closing of heating equipment.
Description of the range	The products of the range are: Easylogic The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.
Specifications are:	Technical data: - Power Supply: For 24V a.c. models: 24 V a.c. (±15%) All others: 90-240V a.c. (-15%, +10%) - Frequency: 50 / 60 Hz - Operation temperature: 0 °C to 45 °C - Button lifetime: 80 K cycles - IEC/EN 60730-1 - IEC/EN 60730-2-9 - IP30

## Constituent materials

Reference product mass	216 g including the product, its packaging and additional elements and accessories
------------------------	--

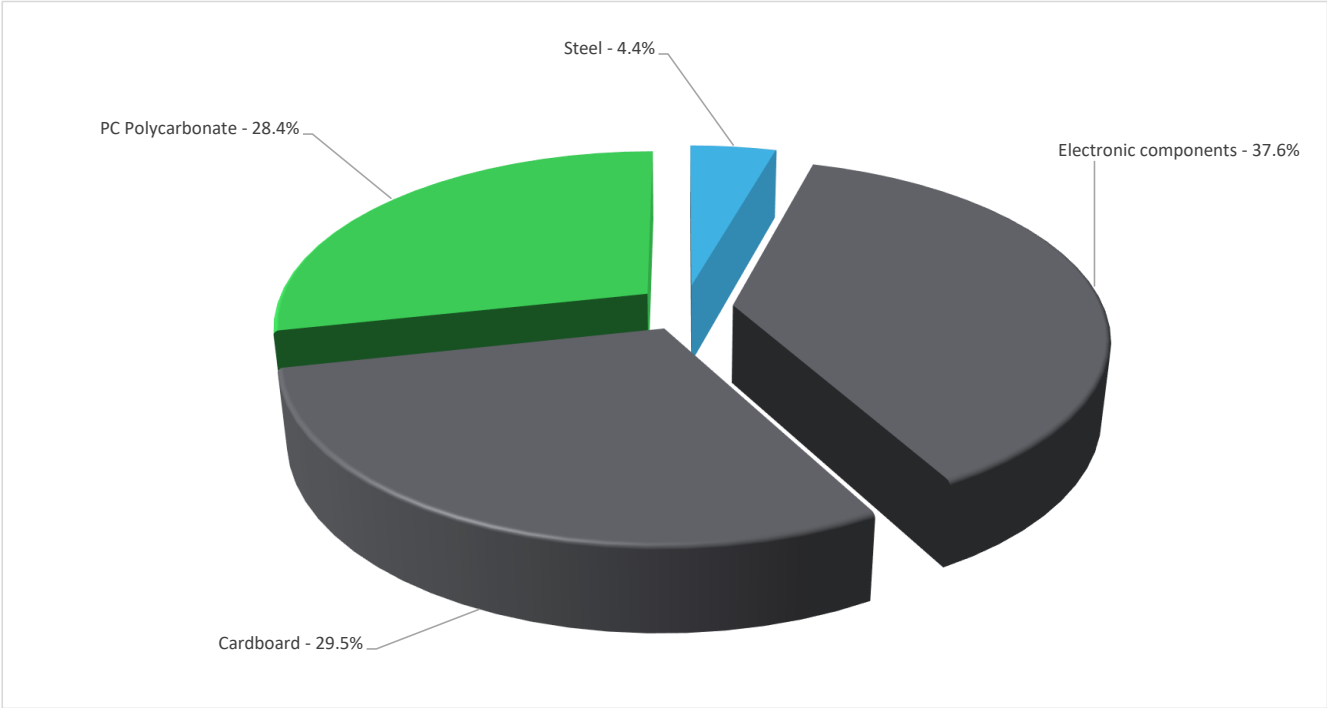

Plastics	28.40%
Metals	4.40%
Others	67.20%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <https://www.se.com/ww/en/work/support/green-premium/>

## Additional environmental information

End Of Life	Recyclability potential:	6%	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
-------------	--------------------------	----	---

## Environmental impacts

Reference service life time	10 years			
Product category	Other equipments - Active product			
Installation elements	The product does not require any installation operations			
Use scenario	The product is in active mode 7.5% of the time with a power use of 0.854W, in stand-by mode 67.5% of the time with a power use of 0.584W and in off mode 25% of the time with a power use of 0.334W, for 10 years.			
Time representativeness	The collected data are representative of the year 2024			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and représentaive of the actual type of technologies used to make the product.			
Geographical representativeness	Rest of the World			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Low voltage; 2018; China, CN	Electricity Mix; Low voltage; 2018; United Arab Emirates, UAE	Electricity Mix; Low voltage; 2018; United Arab Emirates, UAE	Electricity Mix; Low voltage; 2018; United Arab Emirates, UAE

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		EasyLogic thermostat, 4 Pipe 3 Speed modulating, standalone, 24Vac - TC700-3A4PXX-24						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	4.70E+01	1.07E+01	9.08E-01	0*	3.51E+01	3.87E-01	-3.66E-02
Contribution to climate change-fossil	kg CO2 eq	4.69E+01	1.06E+01	9.08E-01	0*	3.50E+01	3.87E-01	-3.65E-02
Contribution to climate change-biogenic	kg CO2 eq	1.13E-01	3.78E-02	0*	0*	7.49E-02	1.05E-04	-8.46E-05
Contribution to climate change-land use and land use change	kg CO2 eq	9.56E-05	9.56E-05	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.17E-06	1.33E-06	8.13E-07	0*	2.74E-08	1.05E-09	-5.38E-09
Contribution to acidification	mol H+ eq	1.46E-01	7.17E-02	3.54E-03	3.32E-05	7.02E-02	3.53E-04	-2.15E-04
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	3.41E-05	3.14E-05	1.08E-07	1.22E-08	1.16E-06	1.40E-06	-5.59E-08
Contribution to eutrophication marine	kg N eq	2.20E-02	7.85E-03	1.45E-03	1.57E-05	1.25E-02	1.38E-04	-2.11E-05
Contribution to eutrophication, terrestrial	mol N eq	2.38E-01	8.25E-02	1.56E-02	1.60E-04	1.38E-01	1.47E-03	-2.46E-04
Contribution to photochemical ozone formation - human health	kg COVNM eq	7.51E-02	2.74E-02	5.65E-03	3.84E-05	4.17E-02	3.78E-04	-8.56E-05
Contribution to resource use, minerals and metals	kg Sb eq	1.48E-03	1.48E-03	0*	0*	1.36E-06	0*	-1.14E-05
Contribution to resource use, fossils	MJ	6.84E+02	1.35E+02	1.15E+01	0*	5.36E+02	2.50E+00	-8.37E-01
Contribution to water use	m3 eq	4.50E+00	3.42E+00	4.68E-02	5.84E-03	6.19E-01	4.11E-01	-1.99E-02

Inventory flows Indicators		EasyLogic thermostat, 4 Pipe 3 Speed modulating, standalone, 24Vac - TC700-3A4PXX-24						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.49E+01	4.23E+00	0*	0*	3.06E+01	4.05E-03	-6.72E-03
Contribution to use of renewable primary energy resources used as raw material	MJ	1.32E+00	1.32E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of renewable primary energy resources	MJ	3.62E+01	5.55E+00	0*	0*	3.06E+01	4.05E-03	-6.72E-03
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6.81E+02	1.32E+02	1.15E+01	0*	5.36E+02	2.50E+00	-8.37E-01
Contribution to use of non renewable primary energy resources used as raw material	MJ	2.93E+00	2.93E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	6.84E+02	1.35E+02	1.15E+01	0*	5.36E+02	2.50E+00	-8.37E-01
Contribution to use of secondary material	kg	3.44E-05	3.44E-05	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.15E-01	8.08E-02	1.09E-03	1.36E-04	1.44E-02	1.88E-02	-7.15E-04
Contribution to hazardous waste disposed	kg	1.78E+01	1.77E+01	0*	0*	1.20E-02	8.15E-02	-9.02E-01
Contribution to non hazardous waste disposed	kg	7.41E+00	3.98E+00	1.14E-03	6.39E-02	3.30E+00	6.70E-02	-2.95E-02
Contribution to radioactive waste disposed	kg	3.34E-03	1.15E-03	1.83E-04	0*	2.01E-03	3.01E-06	-1.33E-05
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.07E-02	1.40E-03	0*	0*	0*	9.34E-03	0.00E+00
Contribution to materials for energy recovery	kg	8.77E-09	8.77E-09	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	1.10E-04	1.77E-05	0*	0*	0*	9.24E-05	0.00E+00

\* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 1.79E-02

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.1, database version 2023-02 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2409011_V1-EN	Drafting rules	PCR-4-ed4-EN-2021 09 06
Date of issue	09-2024	Supplemented by	PSR-0005-ed3.1-EN-2023 06 06
		Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
<p>The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)</p> <p>PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022</p> <p>The components of the present PEP may not be compared with components from any other program.</p> <p>Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"</p>			

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.se.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 928 298 512 €

[www.se.com](http://www.se.com)

ENVPEP2409011\_V1-EN

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

09-2024