


Product Environmental Profile

Power Module for Easy UPS 3M and 3M Advanced

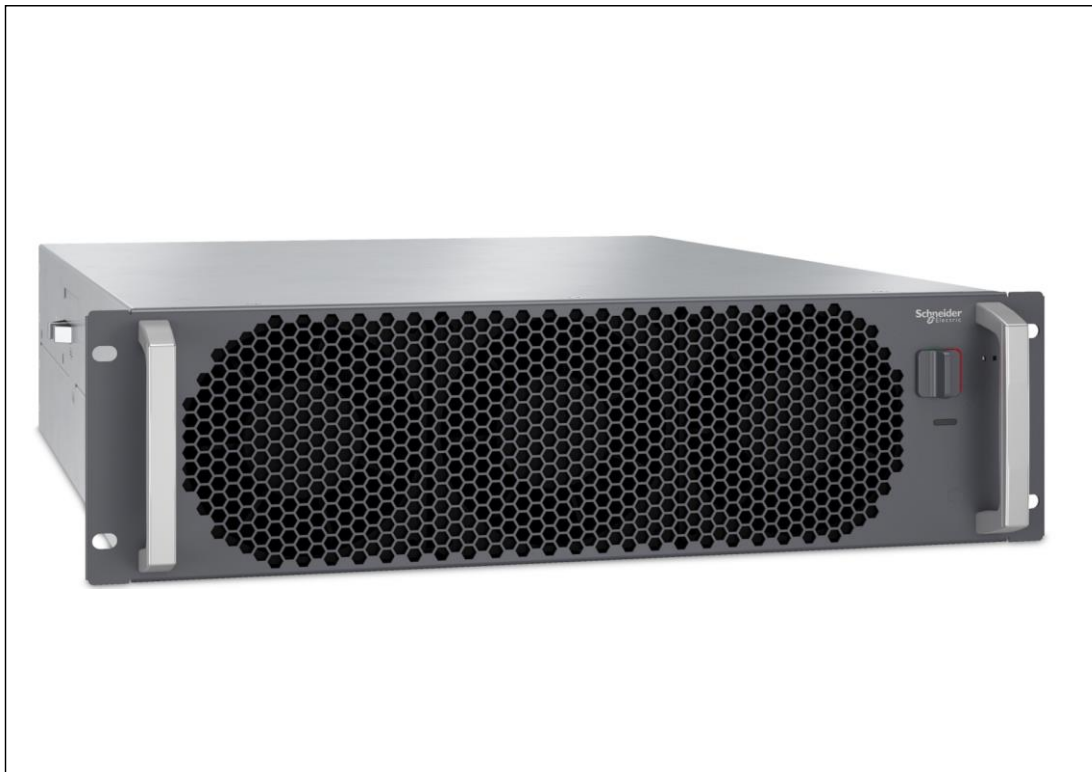


General information

Reference product	Power Module, 50kW, 400V, for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced - EMPM50KH																		
Description of the product	A 50kW, 400V power module compatible with the Easy UPS 3-Phase Modular and Easy UPS 3M Advanced uninterruptible power supplies. Available as a power module replacement or for increased capacity.																		
Description of the range	<p>The environmental impacts of this reference product are representative of the impacts of the other products of the range which are developed with a similar technology.</p> <p>The products of the range are: Easy UPS 3-Series Accessories</p> <table border="1"> <thead> <tr> <th>Linked products</th> <th>Description</th> <th>Net weight (kg)</th> <th>Weight with packaging (kg)</th> <th>Dimension (mm) HxWxD</th> <th>Power Module Rating (PF=1)</th> </tr> </thead> <tbody> <tr> <td>EMPM50KH</td> <td>Power Module, 50kW, 400V, for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced</td> <td>28</td> <td>33.81</td> <td>130 x 666 x 556</td> <td>50kVA/kW</td> </tr> <tr> <td>GPXPM50KH</td> <td>Galaxy PX Power Module 50kW 400V</td> <td>28</td> <td>33.00</td> <td>130 x 666 x 556</td> <td>50kVA/kW</td> </tr> </tbody> </table>	Linked products	Description	Net weight (kg)	Weight with packaging (kg)	Dimension (mm) HxWxD	Power Module Rating (PF=1)	EMPM50KH	Power Module, 50kW, 400V, for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced	28	33.81	130 x 666 x 556	50kVA/kW	GPXPM50KH	Galaxy PX Power Module 50kW 400V	28	33.00	130 x 666 x 556	50kVA/kW
Linked products	Description	Net weight (kg)	Weight with packaging (kg)	Dimension (mm) HxWxD	Power Module Rating (PF=1)														
EMPM50KH	Power Module, 50kW, 400V, for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced	28	33.81	130 x 666 x 556	50kVA/kW														
GPXPM50KH	Galaxy PX Power Module 50kW 400V	28	33.00	130 x 666 x 556	50kVA/kW														
Functional unit	To ensure the supply of power to remain within specified characteristics to equipment with load of 100 watts for a RSL of 1 year.																		
Declared unit	To ensure the supply of power to remain within specified characteristics to equipment with load of 50k watts for a RSL of 15 years.																		

Constituent materials

Reference product mass: 33.814 kg including the product, its packaging, additional elements and accessories

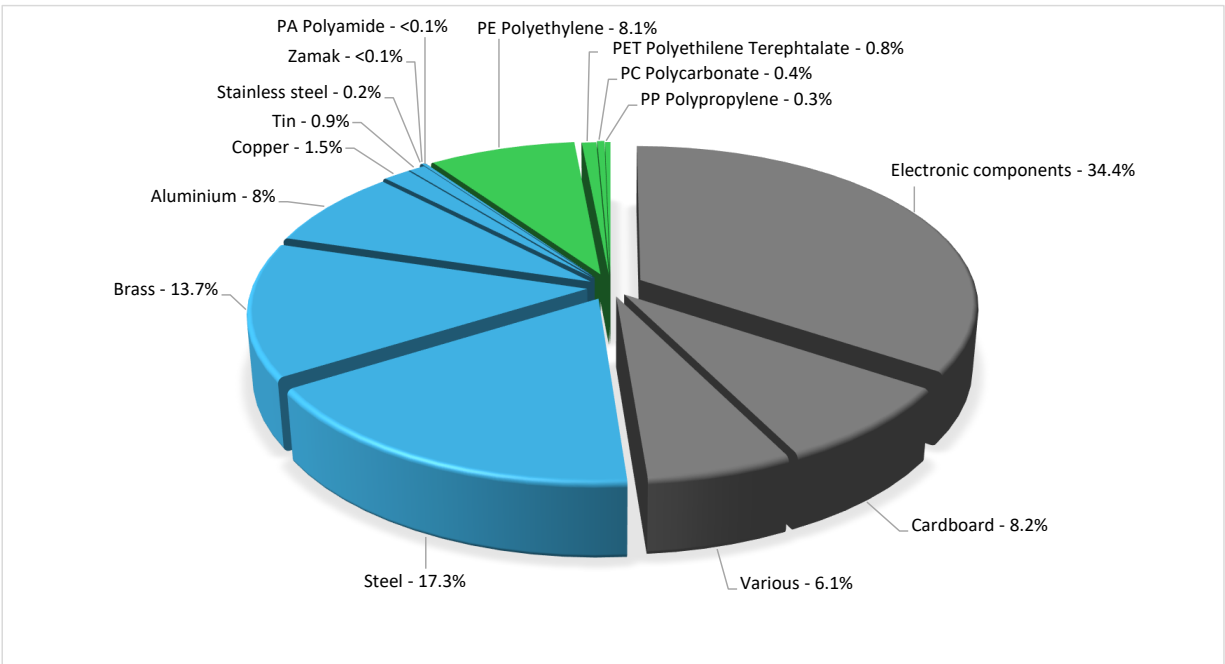

Plastics	9.7%
Metals	41.6%
Others	48.7%

Substance assessment

RoHS compliance Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) on restriction of lead, mercury, cadmium, hexavalent chromium or flame retardants -PBB&PBDE or phthalates-DEHP, BBP, DBP, DIBP.

REACH compliance Products of this range are designed in conformity with the requirements of the REACH 1907/2006 regulation and its latest updates.

Details of ROHS and REACH substances information are available on the Schneider-Electric website <https://www.se.com>

Additional environmental information

End Of Life	Recyclability potential:	49%	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	--

Environmental impacts

Reference service life time	15 years				
Product category	Uninterruptible Power Supply (UPS) - without energy storage system incorporated - P > 10000W				
Life cycle of the product	The manufacturing, the distribution, the installation, the use and the end of life were taken into consideration in this study				
Electricity consumption	The electricity consumed during manufacturing processes is considered for each part of the product individually, the final assembly generates a negligible consumption				
Installation elements	The product does not need specific tools or services, only packaging of the product needs to be eliminated.				
Use scenario	Power consumption conforms to the requirements in PSR-0010-ed2-EN-2023 12 08_UPS:				
	Load rate	25%	50%	75%	100%
	Proportion of time at specified load	0.25	0.5	0.25	0
	The referent power module is modeled to operate in normal mode (average efficiency of 96.1%,and annual use of 8705.25kWh in double conversion) 100% of the time within 15 years.				
Linked products	Type	Average energy efficiency	Electricity consumption (kWh over 15 years)		
EMPM50KH	Power Module, 50kW, 400V, for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced	96.1%	130,579		
GPXPM50KH	Galaxy PX Power Module 50kW 400V	96.1%	130,579		
Time representativeness	The collected data are representative of the year 2025				
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representative of the actual type of technologies used to make the product.				
Geographical representativeness	Final assembly site	Use phase		End-of-life	
	China	Europe		Europe	
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]	
	Electricity Mix; Low voltage; 2020; China, CN	No energy used	Electricity Mix; Low voltage; 2020; Europe, EU-27	Global, European and French datasets are used.	

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.se.com/contact>

The calculation result is scientific counting method. For example, 1.37E+06=1.37*10^6=1370000, 1.64E-04=1.64*10^(-4)=0.000164

All environmental impacts are calculated for the declared unit, then data should be divided by the factor calculated with formulas listed in PSR-0010-ed2.0-EN 2023 12 08 3.1.3 to get the functional unit result (Please refer to the subsequent section entitled "Functional Unit").

Mandatory Indicators		Power Module for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced - EMPM50KH						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO ² eq	5.34E+04	4.87E+02	9.73E+00	1.17E+01	5.28E+04	6.19E+01	-8.50E+01
Contribution to climate change-fossil	kg CO ² eq	5.22E+04	4.91E+02	9.73E+00	7.67E+00	5.16E+04	6.15E+01	-8.69E+01
Contribution to climate change-biogenic	kg CO ² eq	1.17E+03	0*	0*	4.04E+00	1.17E+03	3.81E-01	1.83E+00
Contribution to climate change-land use and land use change	kg CO ² eq	2.70E-04	2.63E-04	0*	2.89E-08	0*	6.90E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	8.99E-04	6.64E-04	8.60E-06	0*	2.26E-04	7.96E-07	-1.58E-05
Contribution to acidification	mol H ⁺ eq	2.81E+02	4.83E+00	4.24E-02	0*	2.76E+02	1.34E-01	-5.96E-01
Contribution to eutrophication, freshwater	kg P eq	1.29E-01	2.27E-03	0*	9.84E-05	1.26E-01	3.63E-04	-3.75E-04
Contribution to eutrophication, marine	kg N eq	3.30E+01	6.14E-01	1.95E-02	4.87E-03	3.23E+01	3.40E-02	-5.27E-02
Contribution to eutrophication, terrestrial	mol N eq	5.26E+02	6.78E+00	2.11E-01	0*	5.18E+02	3.64E-01	-5.77E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.05E+02	2.02E+00	6.92E-02	0*	1.02E+02	9.64E-02	-2.07E-01
Contribution to resource use, minerals and metals	kg Sb eq	7.29E-01	7.12E-01	0*	0*	1.71E-02	0*	-1.12E-02
Contribution to resource use, fossils	MJ	1.27E+06	8.54E+03	0*	0*	1.27E+06	3.39E+02	-1.49E+03
Contribution to water use	m ³ eq	4.17E+03	1.67E+02	4.95E-01	7.09E-01	4.00E+03	3.85E+00	-3.44E+01

Inventory flows Indicators		Power Module for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced - EMPM50KH						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	2.97E+05	5.20E+02	0*	0*	2.96E+05	0*	-2.37E+01
Contribution to renewable primary energy used as raw material	MJ	1.98E+01	1.98E+01	0*	0*	0*	0*	-4.17E+01
Contribution to total renewable primary energy	MJ	2.97E+05	5.40E+02	0*	0*	2.96E+05	0*	-6.55E+01
Contribution to non renewable primary energy used as energy	MJ	1.27E+06	8.25E+03	0*	0*	1.27E+06	3.39E+02	-1.43E+03
Contribution to non renewable primary energy used as raw material	MJ	2.84E+02	2.84E+02	0*	0*	0*	0*	-6.13E+01
Contribution to total non renewable primary energy	MJ	1.27E+06	8.54E+03	0*	0*	1.27E+06	3.39E+02	-1.49E+03
Contribution to use of secondary material	kg	2.57E+00	2.57E+00	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of fresh water	m³	9.75E+01	3.88E+00	1.15E-02	3.07E-02	9.35E+01	1.12E-01	-8.02E-01
Contribution to hazardous waste disposed	kg	4.01E+03	2.54E+03	0*	0*	1.46E+03	1.31E+01	-8.61E+02
Contribution to non hazardous waste disposed	kg	8.17E+03	1.96E+02	0*	3.30E+00	7.96E+03	1.59E+01	-9.20E+01
Contribution to radioactive waste disposed	kg	2.00E+00	1.23E-01	1.94E-03	2.98E-04	1.87E+00	9.08E-04	-6.37E-02
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	2.00E+01	2.38E+00	0*	3.62E+00	0*	1.40E+01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	2.86E-01	2.39E-02	0*	1.23E-01	0*	1.38E-01	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product kg of C 0.00E+00

Contribution to biogenic carbon content of the associated packaging kg of C 7.91E-01

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

i Functional Unit Result

Mandatory Indicators		Power Module for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced - EMPM50KH						
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO ² eq	7.11E+00	6.49E-02	1.30E-03	1.56E-03	7.04E+00	8.25E-03	-1.13E-02
Contribution to climate change-fossil	kg CO ² eq	6.96E+00	6.54E-02	1.30E-03	1.02E-03	6.88E+00	8.20E-03	-1.16E-02
Contribution to climate change-biogenic	kg CO ² eq	1.56E-01	0*	0*	5.39E-04	1.55E-01	5.08E-05	2.44E-04
Contribution to climate change-land use and land use change	kg CO ² eq	3.59E-08	3.50E-08	0*	3.85E-12	0*	9.19E-10	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.20E-07	8.85E-08	1.15E-09	0*	3.01E-08	1.06E-10	-2.11E-09
Contribution to acidification	mol H ⁺ eq	3.75E-02	6.44E-04	5.65E-06	0*	3.68E-02	1.79E-05	-7.94E-05
Contribution to eutrophication, freshwater	kg P eq	1.72E-05	3.02E-07	0*	1.31E-08	1.69E-05	4.84E-08	-5.00E-08
Contribution to eutrophication, marine	kg N eq	4.40E-03	8.18E-05	2.60E-06	6.49E-07	4.31E-03	4.53E-06	-7.02E-06
Contribution to eutrophication, terrestrial	mol N eq	7.01E-02	9.04E-04	2.81E-05	0*	6.91E-02	4.85E-05	-7.70E-05
Contribution to photochemical ozone formation - human health	kg COVNM eq	1.40E-02	2.70E-04	9.22E-06	0*	1.37E-02	1.29E-05	-2.77E-05
Contribution to resource use, minerals and metals	kg Sb eq	9.72E-05	9.49E-05	0*	0*	2.28E-06	0*	-1.49E-06
Contribution to resource use, fossils	MJ	1.70E+02	1.14E+00	0*	0*	1.69E+02	4.52E-02	-1.99E-01
Contribution to water use	m ³ eq	5.56E-01	2.23E-02	6.59E-05	9.46E-05	5.33E-01	5.13E-04	-4.59E-03

Inventory flows Indicators		Power Module for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced - EMPM50KH						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to renewable primary energy used as energy	MJ	3.96E+01	6.94E-02	0*	0*	3.95E+01	0*	-3.16E-03
Contribution to renewable primary energy used as raw material	MJ	2.65E-03	2.65E-03	0*	0*	0*	0*	-5.56E-03
Contribution to total renewable primary energy	MJ	3.96E+01	7.20E-02	0*	0*	3.95E+01	0*	-8.73E-03
Contribution to non renewable primary energy used as energy	MJ	1.70E+02	1.10E+00	0*	0*	1.69E+02	4.52E-02	-1.90E-01
Contribution to non renewable primary energy used as raw material	MJ	3.79E-02	3.79E-02	0*	0*	0*	0*	-8.17E-03
Contribution to total non renewable primary energy	MJ	1.70E+02	1.14E+00	0*	0*	1.69E+02	4.52E-02	-1.99E-01
Contribution to use of secondary material	kg	3.43E-04	3.43E-04	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of fresh water	m³	1.30E-02	5.18E-04	1.54E-06	4.09E-06	1.25E-02	1.50E-05	-1.07E-04
Contribution to hazardous waste disposed	kg	5.35E-01	3.39E-01	0*	0*	1.94E-01	1.75E-03	-1.15E-01
Contribution to non hazardous waste disposed	kg	1.09E+00	2.61E-02	0*	4.41E-04	1.06E+00	2.12E-03	-1.23E-02
Contribution to radioactive waste disposed	kg	2.67E-04	1.64E-05	2.58E-07	3.97E-08	2.50E-04	1.21E-07	-8.50E-06
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	2.67E-03	3.17E-04	0*	4.83E-04	0*	1.87E-03	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	3.81E-05	3.18E-06	0*	1.64E-05	0*	1.85E-05	0.00E+00

* represents less than 0.01% of the total life cycle of the reference flow

Contribution to biogenic carbon content of the product	kg of C	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg of C	1.06E-04

* The calculation of the biogenic carbon is based on the Ademe for the Cardboard (28%), EN16485 for Wood (39,52%), and APESA/RECORD for Paper (37,8%)

i Extrapolated Data

Power Module for Easy UPS 3-Phase Modular and Easy UPS 3M Advanced

Product information	Product Reference	Referent product	
		EMPM50KH	GPXPM50KH
	Weight with Packaging (kg)	33.81	33.00
Compulsory environmental indicators (UPS in double conversion mode)	Contribution to climate change (kg CO2 eq)	5.34E+04	5.33E+04
	Contribution to Ozone depletion (kg CFC11 eq)	8.99E-04	8.83E-04
	Contribution to Acidification (mol H ⁺ eq)	2.81E+02	2.81E+02
	Contribution to eutrophication, freshwater (kg PO ₄ ³⁻ eq)	1.29E-01	1.29E-01
	Contribution to eutrophication marine (kg N eq)	3.30E+01	3.30E+01
	Contribution to eutrophication, terrestrial (mol N eq)	5.26E+02	5.26E+02
	Contribution to photochemical ozone formation - human health (kg COVNM eq)	1.05E+02	1.05E+02
	Contribution to resource use, minerals and metals (kgSbeq)	7.29E-01	7.12E-01
	Total use of primary energy (MJ)	1.57E+06	1.57E+06
	Contribution to water use (m ³ eq)	4.17E+03	4.17E+03

*The extrapolated data is calculated based on the environmental impact data of the declared unit.

Life cycle assessment performed with EIME version v6.2.4, database version 2025-04 in compliance with ISO14044, EF3.1 method is applied, for biogenic carbon storage, assessment methodology -1/1 is used

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP2507013_V1	Drafting rules	PEP-PCR-ed4-2021 09 06
Date of issue	2025/10/29	Supplemented by Information and reference documents	PSR-0010-ed2-EN-2023 12 08 www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
<p>The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)</p> <p>PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022</p> <p>The components of the present PEP may not be compared with components from any other program.</p> <p>Document complies with ISO 14021:2016 "Environmental labels and declarations. Type II environmental declarations"</p>			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

Head Office
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVPEP2507013_V1

Published by Schneider Electric

©2024 - Schneider Electric – All rights reserved

10/2025