

Product End of Life Instructions

Smart-UPS VT

The Smart-UPS VT products increase total power capacity by using multiple uninterruptible power supplies simultaneously and power the connected equipment with multiple uninterruptible power supplies to increase system redundancy.






Potential disassembly risks

Batteries may contain an electrical charge, avoid creating short across terminals.
Cracked or bloated batteries may be hazardous and represent a lead (Pb) exposure.



End of Life Instructions

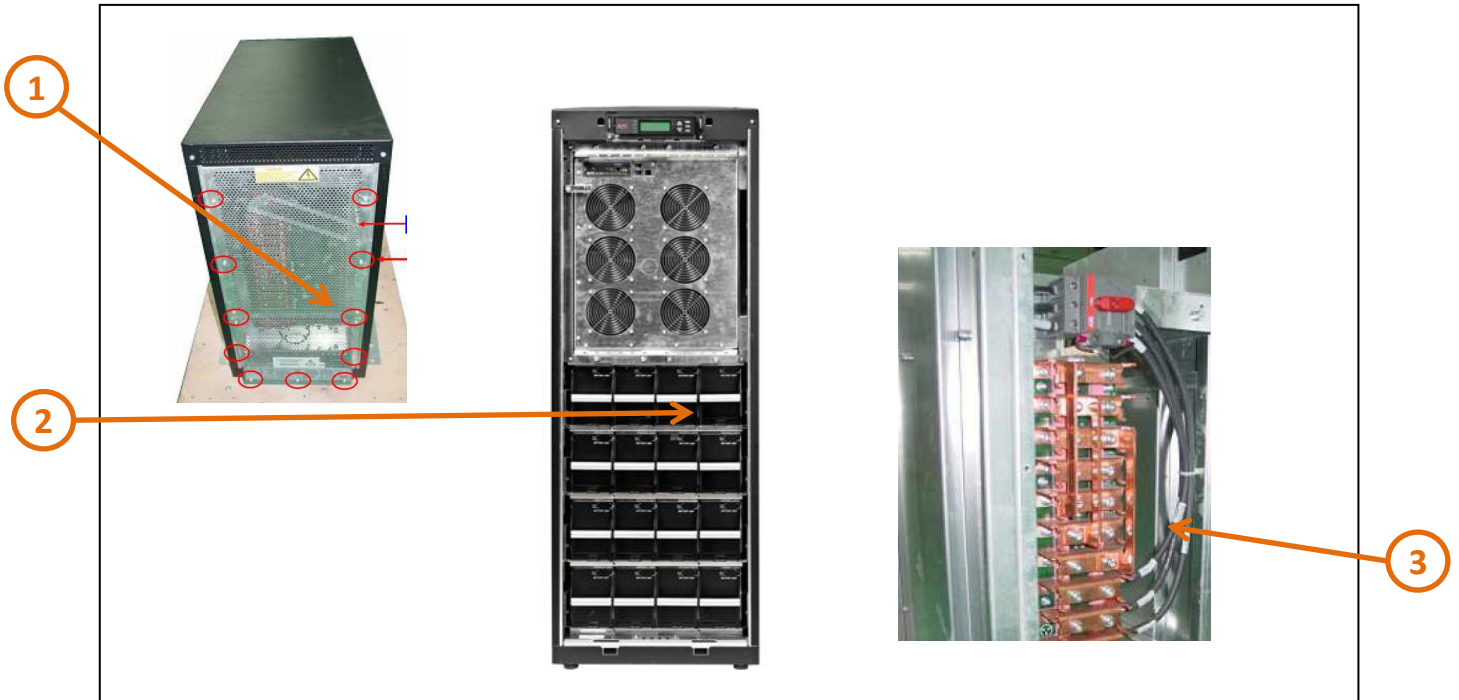

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Printed Circuit Boards	18 803	Mass is for PCBAs>10cm2 in surface area, inside the power module.
To be depolluted	2	Sealed Lead Acid Batteries	638 720	See: Smart-UPS SRT 192V 5kVA and 6kVA Battery Pack for End of Life Instructions. See: material Safety Data sheet available at www.apc.com Use authorized battery recycler. Caution: Batteries may contain an electrical charge, avoid creating short across terminals. Caution:Cracked or bloated batteries may be hazardous and represent a lead (Pb) exposure.
To be depolluted	3	External Power Cables	6 002	Power cables with the unit..



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	APC
Product function	The Smart-UPS VT products provide power protection for servers, voice / data networks, medical labs, and light industrial applications.
Product reference	SUVTP10KH4B4S
Additional similar product references	Smart-UPS VT SUVTP(XXX)(Y) where XXX is a number between 8K and 32K, and Y is blank or any combination of letters and numbers.
Total representative product mass	599050,13188152 g
Representative product dimensions	1490mm x 523mm x 523mm
Accessories	None
Date of information release	12/2018



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	The battery pack used in this product range contains lead acid batteries that are regulated as Dangerous Goods shipping must be performed in accordance with the appropriate transportation regulations.	
Recyclability potential	72%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

© 2018 - Schneider Electric – All rights reserved