

# CERTIFICATE FI/41921

Our Ref. HEL-CERT210300240-02

**Product** Junction Box

**Type** MIB-A1, MIB-A2, MIB-J

**Trademark** **THORSMAN**

**Certificate Holder** Schneider Electric Industries SAS  
35 Rue Joseph Monier, 92500, Rueil-Malmaison, France

**Technical information** 500 V, IP20

**Other information** See page 2 for details

**The product is certified according to the following standard(s)** EN IEC 60670-1:2021 + A11:2021


**Validity** This certificate is valid until 2029-02-22 provided that the Conditions for FI certification are met. This certificate includes the right to use the FI mark under the condition that changes (if any) will be checked at SGS Fimko before the product is brought onto market and that the conditions for FI certification are met.

**Date of issue** 2024-02-22

**SGS Fimko Ltd**

**Signature**

  
Joonas Leinonen  
Certification Manager

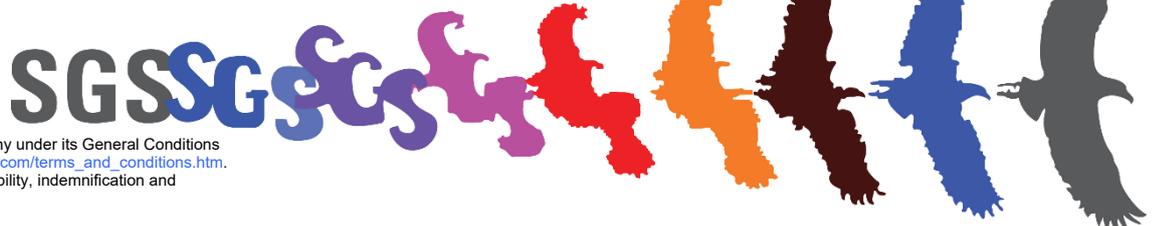

**Manufacturer** Schneider Electric Sverige AB, CMS product department  
Eskilstunavägen 7A, SE -61165, Nyköping, Sweden

**Manufacturing site** Schneider Electric Elda S. A.  
Bugno 1, 78-400, Szczecinek, Poland

**Directive information** The certified product(s) fulfils requirements of mentioned standard(s) which are harmonised under the Low Voltage Directive (2014/35/EU) at the date of issue of the certificate.

**Additional information** The products have certificate SE-S-2100308R2 issued by Intertek Semko AB in accordance with the Nordic Certification Service system.

Flush mounted boxes of insulating material in white colour. The boxes are provided with anchorage for flexible/sheathed cable diameter 8,2-14 mm. See table below.

Type	Article no	Description
MIB-A1	20002339	Limited for built-in use in cable trunking system for single flush mounted accessories. Dimension inner ca 68x65 mm, depth 40 mm, for accessories with fixing distance of 60 mm. For single accessories and alternative provided with 2 insulating frame no. 20038167 (MIB-A1D3).
MIB-A2	20002340	Limited for built-in use in cable trunking system for double flush mounted accessories. Dimension inner ca 135x67 mm, depth 40 mm, for accessories with fixing distance of 60 mm.
MIB-J	20002341	Junction box, limited for built-in use in cable trunking system. Dimension inner ca 67x67 mm, depth 36 mm for floating terminals.

This certificate replaces previous certificate FI/40984, dated 2021-03-16, due to update of standard and renewal of the certificate.

**As shown in the Test Report(s) No(s):** 2308178STO-001