

Harmony[®] XALD, XALK plastic control stations

For Harmony[®] XB5, control and signaling units Ø 22

Catalog

October 2013



How to find the “Automation and Control” products

> Catalogs

Complete product ranges



> Essential guides

Selection of the top selling products



General contents

Harmony® XALD, XALK plastic control stations

Selection guide page 2

■ General

□ Presentation of range page 4

■ References

□ Complete stations (Screw clamp terminal connections)..... page 6

□ Stations for customer assembly: empty enclosures page 10

□ Stations for customer assembly: electrical blockspage 11

□ Stations for customer assembly: heads page 12

□ Stations for customer assembly: accessories page 21

■ How to find the “Automation and Control” products

□ Search, visualize, and download page 28


□ Access product references with adapted tools..... page 30

□ Compare, select, and compile page 32

□ Check the product status, design your equipment page 33

■ **Product reference index**..... page 34


Type of applications	All applications			
Enclosures	Plastic		Glass-reinforced polyester	
	Complete stations and separate components for customer assembly		Empty insulated enclosures	
				
Main feature	Pre-drilled control stations		Pre-drilled or undrilled enclosures	
Associated control and signalling units	Harmony XB5® with plastic bezel		Harmony® XB7, monolithic, plastic	Harmony XB4® with metal bezel Harmony XB5 with plastic bezel
Number of cut-outs for Ø 22 control and signalling units	1, 2, 3, 4 or 5	1, 2 or 3 (complete stations) 1, 2, 3, 4 or 5 (empty enclosures)	1, 2 or 3	1, 2, 4, 8 or 16
Material	Polycarbonate		ABS	Glass-reinforced polyester
Colour	Yellow lid Light grey base	Dark grey lid Light grey base	Light grey or yellow lid Light grey base	Coloured grey throughout
Degree of protection	IP 66 / NEMA Enclosure type 4, 4X and 13		IP 54	IP 65
Function	Emergency Stop or Emergency switching off	Start or Stop Start-Stop with pilot light Motion control	According to equipment fitted: ☐ Start or Stop ☐ Start-Stop with pilot light ☐ Motion control ☐ Emergency stop	
Cable entries	Knock-outs (CM12)		Knock-outs (ISO 20)	Undrilled
Type references	XALK	XALD	XALE	XAPA

			Specific applications		
Metal		Metal front plate, insulated protective rear cover	Plastic		Metal
Empty enclosures		Empty, flush mounting enclosures: front plate + rear cover	Control stations for severe environments	Lift inspection stations	Key operated control stations
					
Pre-drilled enclosures	Pre-drilled or undrilled enclosures	Pre-drilled front plates & rear covers	Pre-drilled empty control stations	Pre-drilled empty enclosures or fitted stations	Fitted stations
Harmony XB4® with metal bezel Harmony XB5® with plastic bezel			Harmony XB5® with plastic bezel	Harmony XB5® or XB7® with plastic bezel	With key lock
8, 16, 24, 30 or 40	1, 2, 3, 4, 6, 8 or 12	1, 2, 3, 4 or 5	1, 2, 3, 4 or 5	1, 2, 3, 4, 5 or 6 with or without power socket	—
Aluminium alloy or sheet steel	Zinc or aluminium alloy	Front plate: brushed aluminium Rear cover: polystyrene	Mineral reinforced polyamide	Polycarbonate	Zinc alloy
Blue lid and base	XAPM: Blue lid Blue base XAPJ: Yellow lid Blue base	Unpainted aluminium	Black lid Black base	Yellow lid Light grey base	Grey
IP 54	IP 65		IP 66 IP 69K	IP 44 (with power socket) IP 55 or IP 66 depending on model	IP 54
According to equipment fitted: ☐ Start or Stop ☐ Start-Stop with pilot light ☐ Motion control ☐ Emergency stop					Start-Stop
☐ Tapped entries for cable-glands ☐ or undrilled	Tapped entries for cable-glands	Knock-outs (with protective rear cover)	Two ISO 20 open entries	☐ Knock-outs (CM12) ☐ or undrilled	Tapped for cable-glands
XB2SL	XAPM, XAPJ	XAPE	XALG	XALF	XAPS

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

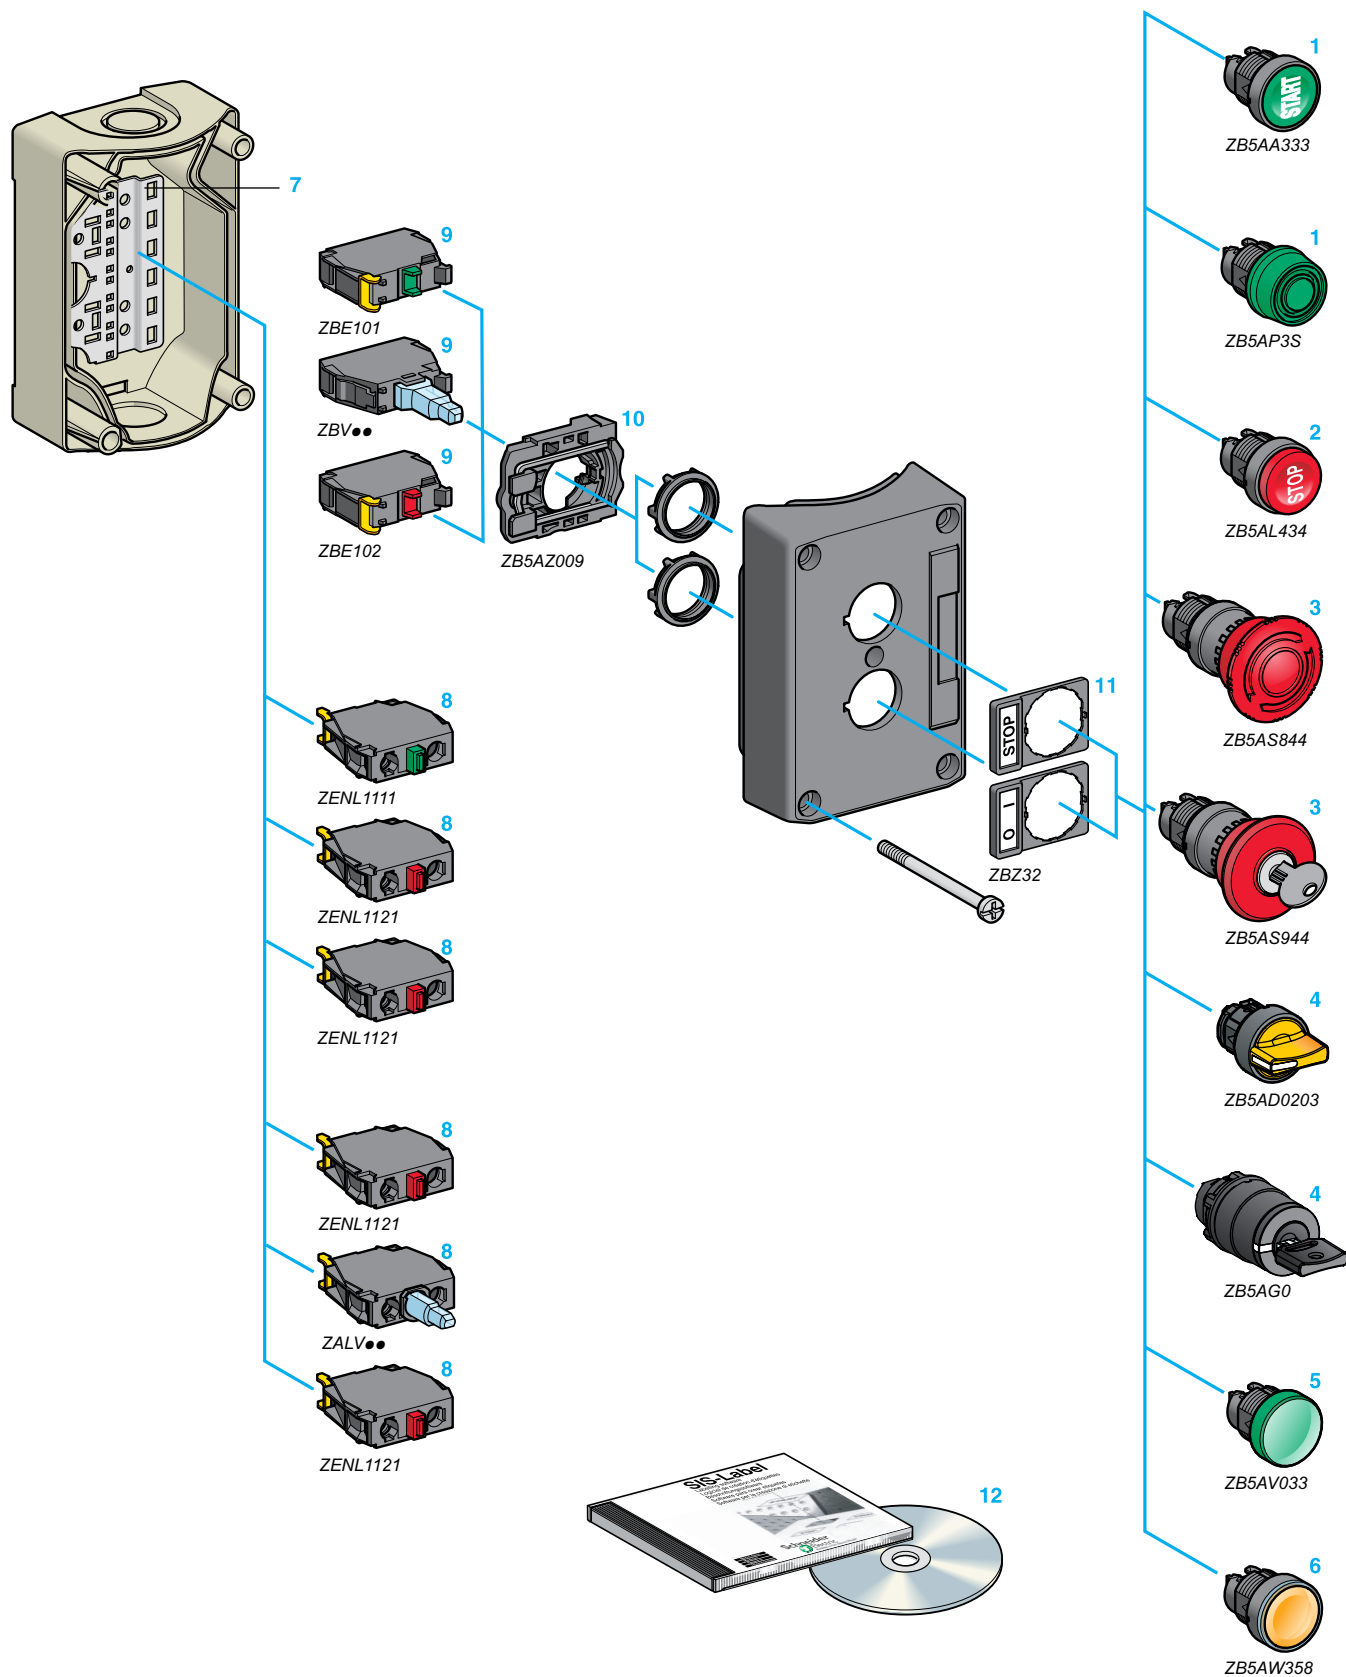

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

XALD and XALK control stations are available in two forms:

- Complete
- For customer assembly

These control stations use the plastic bezel pushbuttons, switches and pilot lights of the Harmony® XB5 range, which offers a wide choice of circular and square types of head.

Complete pre-assembled stations

These are complete, ready to install, stations fitted with 1 to 3 buttons to cater for the most commonly encountered functions:

- **Start or Stop**, with:
 - 1 flush spring return pushbutton,
 - 1 red, spring return, mushroom head pushbutton.
 - **Emergency stop or Emergency switching off**, with:
 - 1 red, latching, mushroom head pushbutton **3**, either push-pull or turn to release, with or without key.
 - **Start-Stop**, with:
 - 2 flush spring return pushbuttons,
 - 1 flush spring return pushbutton **1** + 1 projecting spring return pushbutton **2**,
 - 1 2-position selector switch **4** + 1 pilot light with integral red LED, if required.
 - **Two functions**, with:
 - 2 flush spring return pushbuttons **1**.
 - **Three functions**, with:
 - 3 flush spring return pushbuttons **1**,
 - 2 flush spring return pushbuttons **1** + 1 projecting spring return pushbutton **2**,
 - 2 flush spring return pushbuttons **1** + 1 red, latching, mushroom head pushbutton **3**.
- These pushbuttons, switches and pilot lights comprise plastic heads from the Harmony® XB5 range and electrical blocks (contact or light) **8** that are mounted in the back of the enclosure.

Stations for customer assemblies

These stations are for assembly by the user and offer a choice of 2 assembly methods:

■ Box method

Identical to the pre-assembled versions. The electrical blocks **8** are mounted on a metal mounting plate in the back of the enclosure **7**.

■ Station method

The electrical blocks **9** are mounted directly beneath the heads using a body/fixing collar **10**.

It is possible to assemble stations with 1 to 5 heads, each of which can be combined with 3 electrical blocks **8** or **9** (contact or light).

The XAL range offers a wide choice of head types for:

- Spring return pushbuttons **1** or **2**, either marked or unmarked
 - Spring return mushroom head pushbuttons
 - Latching mushroom head pushbuttons **3**
 - Selector switches with standard or long handle and key switches **4**
 - Toggle switches
 - Pilot lights **5**
 - Illuminated spring return pushbuttons **6**
- Illuminated selector switches with standard handle **4**.

Accessories for heads

Markings can be customised by using legend holders **11** which can either be fitted with pre-marked legends or legends engraved by the user. Alternatively, paper legends (protected), prepared using "SIS Label" software **12**, or peel-off legends (supplied on sheet for marking by laser printer) can be used.

Material and colors

- **Start-Stop** control stations (XALD):
light grey base "RAL 7035", dark grey lid "RAL 7016"
- Control stations with **Emergency stop** or **Emergency switching off** functions (XALK): light grey "RAL 7035" base, yellow "RAL 7021" lid
- Lid fixing screws and nut material: stainless steel type A4, AISI 316.

Environment

- Protection degree: IP 66 (EN/IEC 60529) and UL/CSA Enclosure type 4, 4X and 13.
- High pressure cleaning resistance: 70 x 10⁵ Pa (70 bars), distance 0.1 m (temp. 55° C)
- Ambient air temperature for operation: - 25 to + 70° C
- Conformity to standards :
 - EN/IEC 60947-5-1, 60947-5-4 for **Start-Stop** control stations,
 - EN/IEC 60204-1 and EN/ISO 13850 for control stations with **Emergency stop** function,
 - IEC 60364-5-53 for control stations with **Emergency switching off** function.
- Product certifications : UL Listed, CSA, GOST.

Connection

- Knock-out entries for cable-gland (CM 12, Pg 13.5 and tapped ISO 20).
- Knock-outs for cable entry through rear.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Complete stations (screw clamp terminal connections)

Start or Stop function

■ Light grey "RAL 7035" base, dark grey "RAL 7016" lid

Description	Type of push	Dimensions (1) w x h x d mm	Type of contact		Marking	Reference	Weight kg	
			 N/O	 N/C				
Marking on pushbutton								
1 spring return pushbutton	Flush, green	68 x 68 x 62	1	—	I	XALD102 (2)	0.135	
					Marche	XALD104 (2)	0.156	
					Start	XALD103 (2)	0.156	
				1	1	I	XALD102E	0.165
	Flush, red	68 x 68 x 62	—	1	O	XALD112	0.156	
					Arrêt	XALD117	0.156	
					Stop	XALD114 (2)	0.165	
				1	1	O	XALD112E	0.165
						Stop	XALD114E	0.165
	Projecting, red	68 x 68 x 66.5	—	1	O	XALD115 (2)	0.157	
					Arrêt	XALD118	0.157	
					Stop	XALD116	0.157	
Marking on legend holder and legend below head								
1 spring return pushbutton	Flush, green	68 x 68 x 62	1	—	Marche	XALD101 (2)	0.157	
					Start	XALD101H29 (2)	0.157	
	Flush, red	68 x 68 x 62	—	1	Arrêt	XALD111	0.157	
					Stop	XALD111H29 (2)	0.157	
1 mushroom head pushbutton, Ø 40 mm, spring return	Red	68 x 68 x 86	—	1	Arrêt	XALD164 (2)	0.182	
					Stop	XALD164H29H7	0.182	

(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(2) Please add H7 for UL/CSA conformity, example: XALK102H7.

Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 2006/42/EC and to standard EN/IEC 60947-5-5.

Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.

Please consult our Customer Care Centre for a full explanation of these standards and directives.

Emergency stop and Emergency switching off functions with trigger action and mechanical latching

■ Light grey "RAL 7035" base, yellow "RAL 1021" lid

■ Conformity to standards EN/IEC 60204-1, EN/ISO 13850 (1), EN/IEC 60947-5-5 and to Machinery directive 2006/42/CE (2)

Description	Dimensions (3) w x h x d mm	Type of contact		Marking	Reference	Weight kg
						
		"F"	"O"			
Unmarked						
1 mushroom head pushbutton, Ø 40 mm, red Turn to release	68 x 68 x 92.5	–	1	–	XALK178 (4)	0.194
		–	2	–	XALK178F (4)	0.194
		1	1	–	XALK178E (4)	0.194
		1	2	–	XALK178G (4)	0.194
1 mushroom head pushbutton, Ø 40 mm, red Key release (key n° 455)	68 x 68 x 114.5	–	1	–	XALK188 (4)	0.188
		–	2	–	XALK188F	0.188
		1	1	–	XALK188E (4)	0.188
		1	2	–	XALK188G	0.188
1 mushroom head pushbutton, Ø 40 mm, red Push-pull	68 x 68 x 91.5	–	1	–	XALK198 (4)	0.193
Marked						
1 mushroom head pushbutton, Ø 40 mm, red Turn to release	68 x 68 x 92.5	–	1	NODSTOP	XALK178H26	0.194
		–	1	EMERGENCY STOP	XALK178H29 (4)	0.194
		–	1	NOT HALT	XALK178H44	0.194
		–	1	NODSTOPP	XALK178H49	0.194
		–	2	NODSTOP	XALK178FH26	0.194
		–	2	EMERGENCY STOP	XALK178FH29	0.194
		–	2	NOT HALT	XALK178FH44	0.194
		–	2	NODSTOPP	XALK178FH49	0.194
		1	2	NODSTOP	XALK178GTH26 (5)	0.197
		1	2	EMERGENCY STOP	XALK178GTH29 (5)	0.197
		1	2	NOT HALT	XALK178GTH44 (5)	0.197
		–	2	NODSTOP	XALK188GTH26 (5)	0.188

(1) Our Customer Care Centre may provide a control station type XALK188 with marking of the Emergency stop function and of the logo in conformity with the requests of EN/ISO 13850 standard, paragraph 4.4.6.

(2) Please consult our Customer Care Centre for full details of these standards and directives.

(3) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(4) Please add H7 for UL/CSA conformity, example: XALK178H7.

(5) T for direct head mounting on cover with ZB5AZ009 fixing base.



XALK178●



XALK188●



XALK198

Start-Stop function

■ Light grey "RAL 7035" base, yellow "RAL 1021" lid

Description	Dimensions (3) w x h x d mm	Type of contact		Marking	Reference	Weight kg
						
		N/O	N/C			

Marking on pushbutton (2)

2 spring return pushbuttons:

- 1 flush, green

- 1 flush, red

68 x 106 x 62

1

-

I

XALD213 (3)

0.233

O

Marche

XALD224 (3)

0.233

Arrêt

Start

XALD215 (3)

0.233

Stop

I

XALD213E

0.252

O

2 spring return pushbuttons:

- 1 flush, green

- 1 projecting, red

68 x 106 x 66.5

1

-

I

XALD214

0.234

O

Start

XALD225 (3)

0.234

Stop

Marking on legend holder and legend below head

2 spring return pushbuttons:

- 1 flush, green

- 1 projecting, red

68 x 106 x 62

1

-

Marche

XALD211 (3)

0.233

Arrêt

Start

XALD211H29 (3)

0.233

Stop

2 spring return pushbuttons,

flush type, green

68 x 106 x 62

1

-

Ouverture

XALD241

0.233

Fermeture

1 selector switch with

standard handle

2-position stay put

68 x 106 x 80

1

-

O-I

XALD134 (3)

0.163

Arrêt-Marche

XALD132 (3)

0.163

Start

XALD133H7

0.163

Stop

1 key switch (key n° 455), key

withdrawal from left-hand

position

68 x 106 x 105.5

1

-

O-I

XALD144 (3)

0.187

Arrêt-Marche

XALD142

0.196

O-I

XALD144E (3)

0.196

Description	Dimensions (3) w x h x d mm	Type of contact		Marking	Pilot light supply V	Reference	Weight kg
							
		N/O	N/C				

With pilot light and marking on pushbutton (2)

2 spring return pushbuttons

and 1 pilot light with integral

red LED

68 x 136 x 64.5

1

-

I

≈ 24

XALD363B

0.261

O

≈ 120

XALD363G (3)

0.261

≈ 230

XALD363M

0.261

With pilot light and marking on legend holder and legend below head

2 spring return pushbuttons

and 1 pilot light with integral

red LED

68 x 136 x 64.5

1

-

Marche

≈ 24

XALD361B

0.261

Arrêt

≈ 230

XALD361M (3)

0.261

Protected
LEDProtected
LED(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(2) Push supplied with cap not clipped-in, allowing orientation through 90° in 360° steps.

(3) Please add H7 for UL/CSA conformity, example: XALD213H7.



XALD224



XALD211H29



XALD134



XALD144



XALD363B

Two function

■ Light grey "RAL 7035" base, yellow "RAL 1021" lid

Description	Dimensions (1) w x h x d mm	Type of contact		Marking	Reference	Weight kg
						
		N/O	N/C			
Marking on pushbutton (2)						
2 spring return pushbuttons: - 1 flush, white - 1 flush, black	68 x 106 x 62	1	—	↑	XALD222 (4)	0.233
		1	—	↓		
		1	—	→	XALD223	0.233
		1	1	↔		
		1	1	↑	XALD222E	0.233
		1	1	↓		



XALD222

Three function

■ Light grey "RAL 7035" base, yellow "RAL 1021" lid

Description	Dimensions (1) w x h x d mm	Type of contact		Marking	Reference	Weight kg
						
		N/O	N/C			
Marking on pushbutton (2)						
3 spring return pushbuttons: - 1 flush, green - 1 flush, red - 1 flush, green	68 x 136 x 62	1 — 1	— 1 —	I O II	XALD339 (4)	0.298
3 spring return pushbuttons: - 1 flush, white - 1 flush, red - 1 flush, black	68 x 136 x 62	1 — 1	— 1 —	↑ O ↓	XALD324 (4)	0.298
				↑ Stop ↓	XALD326 (4)	0.298
				→ O ←	XALD334 (4)	0.298
		1 1 1	1 1 1	↑ O ↓	XALD324E	0.317
3 spring return pushbuttons: - 1 flush, white - 1 projecting, red - 1 flush, black	68 x 136 x 62	1 — 1	— 1 —	↑ O ↓	XALD325	0.299
2 spring return + 1 mushroom head pushbuttons: - 1 flush, white - 1 mushroom head, red (3) - 1 flush, black	68 x 136 x 87.5	1 — 1	— 1 —	↑ O ↓	XALD328 (4)	0.317
Marking on legend holder and legend below head						
3 spring return pushbuttons: - 1 flush, green - 1 flush, red - 1 flush, green	68 x 136 x 62	1 — 1	— 1 —	Avant Arrêt Arrière	XALD311 (4)	0.299
				FORWARD STOP REVERSE	XALD311H29H7	0.299
				Montée Arrêt Descente	XALD321	0.299
				UP STOP DOWN	XALD321H29H7	0.299



XALD339



XALD334



XALD321

(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.

(2) Push supplied with cap not clipped-in, allowing orientation through 90° in 360° steps.

(3) Standard turn to release, latching, Ø 30 mm.

(4) Please add H7 for UL/CSA conformity, example: XALD22H7.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: empty enclosures



XALD02



XALK01H29

Empty control stations (lid fixing screws and nut material: stainless steel type A4, AISI 316)

Description	Text and logo	Dimensions (1) w x h x d mm	Number of cut-outs	Reference	Weight kg
Light grey "RAL 7035" base Dark grey "RAL 7016" lid	Without	68 x 68 x 53	1	XALD01	0.136
		68 x 106 x 53	2	XALD02	0.193
		68 x 136 x 53	3	XALD03	0.238
		68 x 166 x 53	4	XALD04	0.278
		68 x 196 x 53	5	XALD05	0.322
Light grey "RAL 7035" base Yellow "RAL 1021" lid For Emergency stop function	Without	68 x 68 x 53	1	XALK01 (5)	0.136
		68 x 106 x 53	2	XALK02	0.193
		68 x 136 x 53	3	XALK03 (5)	0.238
		68 x 166 x 53	4	XALK04	0.278
		68 x 196 x 53	5	XALK05	0.322
	With text «ARRET D'URGENCE» (2) and logo (3)	68 x 68 x 53	1	XALK01HFR	0.136
	With text «EMERGENCY STOP» (2) and logo (3)	68 x 68 x 53	1	XALK01H29	0.136
	With text «NOT HALT» (2) and logo (3)	68 x 68 x 53	1	XALK01H44	0.136
	Without	68 x 68 x 53	1	XALK01T (6)	0.136
	With text «ARRET D'URGENCE» (2) and logo (3)	68 x 68 x 53	1	XALK01THFR (6)	0.136
	With text «NODSTOP» (2) and logo (3)	68 x 68 x 53	1	XALK01TH26 (6)	0.136
	With text «EMERGENCY STOP» (2) and logo (3)	68 x 68 x 53	1	XALK01TH29 (6)	0.136
CSA + UL certified (4)					
Light grey "RAL 7035" base Dark grey "RAL 7016" lid	Without	68 x 68 x 53	1	XALD01H7	0.136
		68 x 106 x 53	2	XALD02H7	0.205
		68 x 136 x 53	3	XALD03H7	0.238
		68 x 136 x 53	3	XALD04H7	0.238
		68 x 136 x 53	3	XALD05H7	0.238

(1) Please see our website www.schneider-electric.com for more precised information about dimensions of components.





(2) For supply of the text in an other language, please consult our Customer Care Centre.

(3) For complying with ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

(4) Volt-free commoning/earth terminal included.

(5) Please add H7 for UL/CSA conformity, example: XALD01H7.

(6) T for direct head mounting on cover with ZB5AZ009 fixing base.



Electrical blocks and accessories for mounting in back of enclosure

Description	Description	Color	Sold in lots of	Unit reference	Weight kg
Electrical blocks with screw clamp terminal connections					
Standard contact blocks (1)	N/O contact	–	5	ZENL1111	0.015
	N/C contact	–	5	ZENL1121	0.015
Light blocks with integral LED (1)	~ 24 V	White	5	ZALVB1	0.015
		Green	5	ZALVB3	0.015
		Red	5	ZALVB4	0.015
		Yellow	5	ZALVB5	0.015
		Blue	5	ZALVB6	0.015
	~ 110...120 V	White	5	ZALVG1	0.015
		Green	5	ZALVG3	0.015
		Red	5	ZALVG4	0.015
		Yellow	5	ZALVG5	0.015
		Blue	5	ZALVG6	0.015
	~ 230...240 V	White	5	ZALVM1	0.015
		Green	5	ZALVM3	0.015
		Red	5	ZALVM4	0.015
		Yellow	5	ZALVM5	0.015
		Blue	5	ZALVM6	0.015

Description	For use with	Sold in lots of	Unit reference	Weight kg
Accessories for electrical blocks				
Blanking plug	Ø 22 mm units	10	ZB5SZ3	0.008
Nut	Head fixing	10	ZB5AZ901	0.002
Volt-free terminal	Commoning/earth	10	XALZ09	0.003
Bezel tool	For tightening nut ZB5AZ901	1	ZB5AZ905	0.016

Electrical blocks and accessories for mounting beneath heads

Description	Description	Color	Sold in lots of	Unit reference	Weight kg
Electrical blocks with screw clamp terminal connections (2) (for use with body/fixing collar ZB5AZ009)					
Standard contact blocks	N/O contact	–	5	ZBE101	0.016
	N/C contact	–	5	ZBE102	0.016
Light blocks with integral LED	~ 24 V	White	5	ZBVB1	0.016
		Green	5	ZBVB3	0.016
		Red	5	ZBVB4	0.016
		Yellow	5	ZBVB5	0.016
		Blue	5	ZBVB6	0.016
	~ 110...120 V	White	5	ZBVG1	0.016
		Green	5	ZBVG3	0.016
		Red	5	ZBVG4	0.016
		Yellow	5	ZBVG5	0.016
		Blue	5	ZBVG6	0.016
	~ 230...240 V	White	5	ZBVM1	0.016
		Green	5	ZBVM3	0.016
		Red	5	ZBVM4	0.016
		Yellow	5	ZBVM5	0.016
		Blue	5	ZBVM6	0.016

Description	For use with	Voltage	Level of protection	Unit reference	Weight kg
Accessories for electrical blocks					
LED suppressors for high powers (≥ 30 VA)	Electrical light blocks with integral LED	~ 120 V	25...120 VA	ZBZVG	0.010
		~ 230 V	30...230 VA	ZBZVM	0.010
Body/fixing collar Sold in lots of 10	Electrical blocks (contact or light)	–	–	ZB5AZ009	0.006

(1) A maximum of 3 electrical blocks can be fitted per associated head.

(2) For electrical blocks for printed circuit board connection: please consult our Customer Care Centre.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AA0



ZB5AA5



ZB5AP2S



ZB5AL3



ZB5CA2



ZB5CA5

Heads for spring return pushbuttons - unmarked

Shape of head	Type of push	Color of cap	Reference	Weight kg
	Without cap (1)	—	ZB5AA0	0.022
	Flush, with set of 6 colored caps	6 colors (2)	ZB5AA9	0.027
	Flush	White	ZB5AA1	0.018
		Black	ZB5AA2	0.018
		Green	ZB5AA3	0.018
		Red	ZB5AA4	0.018
		Yellow	ZB5AA5	0.018
		Blue	ZB5AA6	0.018
	Flush with transparent cap, for insertion of legend (3)	Grey	ZB5AA8	0.018
		White	ZB5AA18	0.018
		Green	ZB5AA38	0.018
		Red	ZB5AA48	0.018
		Yellow	ZB5AA58	0.018
	Booted (colored silicone) Can be replaced without dismantling the head	Blue	ZB5AA68	0.018
		White	ZB5AP1S	0.014
		Black	ZB5AP2S	0.014
		Green	ZB5AP3S	0.014
		Red	ZB5AP4S	0.014
		Yellow	ZB5AP5S	0.014
	Projecting	Blue	ZB5AP6S	0.014
		White	ZB5AL1	0.019
		Black	ZB5AL2	0.019
		Green	ZB5AL3	0.019
		Red	ZB5AL4	0.019
		Yellow	ZB5AL5	0.019
	Flush (high guard)	Blue	ZB5AL6	0.019
		White	ZB5AA14	0.020
		Black	ZB5AA24	0.020
		Green	ZB5AA34	0.020
		Red	ZB5AA44	0.020
		Yellow	ZB5AA54	0.020
	Recessed (high guard)	Blue	ZB5AA64	0.020
		White	ZB5AA16	0.019
		Black	ZB5AA26	0.019
		Green	ZB5AA36	0.019
		Red	ZB5AA46	0.019
		Yellow	ZB5AA56	0.019
	Flush	Blue	ZB5AA66	0.019
		White	ZB5CA1	0.019
		Black	ZB5CA2	0.019
		Green	ZB5CA3	0.019
		Red	ZB5CA4	0.019
		Yellow	ZB5CA5	0.019
	Projecting	Blue	ZB5CA6	0.019
		White	ZB5CL1	0.021
		Black	ZB5CL2	0.021
		Green	ZB5CL3	0.021
		Red	ZB5CL4	0.021
		Yellow	ZB5CL5	0.021
		Blue	ZB5CL6	0.021

(1) Cap to be ordered separately, see page 25.

(2) Head supplied with 6 different colored caps (white, black, green, red, yellow, blue).

(3) For legend ordering information, see page 24.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AA331



ZB5AA432



ZB5AL232



ZB5AC24



ZB5AC2

Heads for spring return pushbuttons - marked

Shape of head	Type of push	Marking	Color	Color of cap	Reference	Weight kg
		Text				
	Flush (1)	I	White	Green	ZB5AA331	0.018
			Black	White	ZB5AA131	0.018
		II	White	Green	ZB5AA336	0.018
			Black	White	ZB5AA136	0.018
		START	White	Green	ZB5AA333	0.018
			Black	White	ZB5AA133	0.018
		ON	White	Green	ZB5AA341	0.018
			Black	White	ZB5AA141	0.018
		MARCHE	White	Green	ZB5AA342	0.018
			Black	White	ZB5AA142	0.018
			White	Black	ZB5AA245	0.018
			Black	White	ZB5AA145	0.018
		O	White	Red	ZB5AA432	0.018
				Black	ZB5AA232	0.018
		ARRET	White	Red	ZB5AA433	0.018
				Black	ZB5AA233	0.018
		STOP	White	Red	ZB5AA434	0.018
				Black	ZB5AA234	0.018
		OFF	White	Red	ZB5AA435	0.018
				Black	ZB5AA235	0.018
		UP	Black	White	ZB5AA343	0.018
		DOWN	White	Black	ZB5AA344	0.018
		↑	White	Black	ZB5AA335	0.018
			Black	White	ZB5AA334	0.018
	Projecting (1)	O	White	Red	ZB5AL432	0.019
				Black	ZB5AL232	0.019
		ARRET	White	Red	ZB5AL433	0.019
				Black	ZB5AL233	0.019
		STOP	White	Red	ZB5AL434	0.019
				Black	ZB5AL234	0.019
		OFF	White	Red	ZB5AL435	0.019
				Black	ZB5AL235	0.019
	Flush (1)	I	White	Green	ZB5CA331	0.019
		O	White	Red	ZB5CA432	0.019
		+	White	Black	ZB5CA2934	0.019
		↑	White	Black	ZB5CA2912	0.019
		R	White	Blue	ZB5CA6939	0.019

Mushroom heads for spring return pushbuttons

Shape of head	Diameter of push mm	Color of push	Reference	Weight kg
	30	Black	ZB5AC24	0.027
		Green	ZB5AC34	0.027
		Red	ZB5AC44	0.027
		Yellow	ZB5AC54	0.027
		Blue	ZB5AC64	0.027
	40	Black	ZB5AC2	0.046
		Green	ZB5AC3	0.046
		Red	ZB5AC4	0.046
		Yellow	ZB5AC5	0.046
		Blue	ZB5AC6	0.046

(1) Push supplied with cap not clipped-in, allowing orientation through 90° in 360° steps.

Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 2006/42/EC and to standard EN/IEC 60947-5-5.

Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.

Please consult our Customer Care Centre for a full explanation of these standards and directives.

Emergency stop and switching off pushbuttons with trigger action and mechanical latching

Shape of head	Type of push	Diameter of push mm	Color of push	Reference	Weight kg
	Trigger action Push-pull	30	Red	ZB5AT844 (1)	0.050
		40	Red	ZB5AT84 (1)	0.050
	Trigger action Turn to release	30	Red	ZB5AS834 (1)	0.042
		40	Red	ZB5AS844 (1)	0.046
	Trigger action Key release (key n° 4A185)	30	Red	ZB5AS934 (1) (3)	0.068
		40	Red	ZB5AS944 (1)	0.071
		60	Red	ZB5AS964 (1)	0.092
	Trigger action Key release (key n° 4A185)	40	Red	ZB5AS944D (1)	0.071



Emergency switching off, mechanical latching pushbuttons

Shape of head	Type of push	Diameter of push mm	Color of push	Reference	Weight kg
	Push-pull	30	Black	ZB5AT24 (2)	0.044
		40	Black	ZB5AT2 (2)	0.049
	Turn to release	30	Black	ZB5AS42 (2)	0.040
		40	Black	ZB5AS52 (2)	0.044
			Yellow	ZB5AS55 (2)	0.044
	Key release (key n° 4A185) (3)	30	Black	ZB5AS72 (2)	0.040
		40	Black	ZB5AS12 (2)	0.044

(1) Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 2006/42/EC and to standard EN/IEC 60947-5-5.

(2) Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5. Please consult our Customer Care Centre for full details of these standards and directives.

(3) Other key numbers:

- key n° 421E: add suffix **12** to the reference.
- key n° 458A: add suffix **10** to the reference.
- key n° 520E: add suffix **14** to the reference.
- key n° 3131A: add suffix **20** to the reference.

Example: The reference for a Ø 40 mushroom head for a trigger action latching pushbutton with release by key n° 421E becomes: **ZB5AS94412**.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AD2

Heads for selector switches (1)

Shape of head	Type of operator	Number and type of positions		Reference	Weight kg
	Standard handle, black	2 - stay put		ZB5AD2	0.017
		2 - spring return from right to left		ZB5AD4	0.020
		3 - stay put		ZB5AD3	0.017
		3 - spring return to centre		ZB5AD5	0.017
		3 - spring return from left to centre		ZB5AD7	0.017
		3 - spring return from right to centre		ZB5AD8	0.017
	Standard handle, white	2 - stay put		ZB5AD201	0.017
		2 - spring return from right to left		ZB5AD401	0.020
		3 - stay put		ZB5AD301	0.017
		3 - spring return to centre		ZB5AD501	0.017
		3 - spring return from left to centre		ZB5AD701	0.017
		3 - spring return from right to centre		ZB5AD801	0.017
	Standard handle, green	2 - stay put		ZB5AD203	0.017
		2 - spring return from right to left		ZB5AD403	0.020
		3 - stay put		ZB5AD303	0.017
		3 - spring return to centre		ZB5AD503	0.017
		3 - spring return from left to centre		ZB5AD703	0.017
		3 - spring return from right to centre		ZB5AD803	0.017

(1) Can only be used for actuation of end of row (side) mounted contacts.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: heads



ZB5AD●●●



Heads for selector switches (1) (continued)

Shape of head	Type of operator	Number and type of positions	Reference	Weight kg
	Standard handle, red	2 - stay put	ZB5AD204	0.017
		2 - spring return from right to left	ZB5AD404	0.020
		3 - stay put	ZB5AD304	0.017
		3 - spring return to centre	ZB5AD504	0.017
		3 - spring return from left to centre	ZB5AD704	0.017
		3 - spring return from right to centre	ZB5AD804	0.017
	Standard handle, yellow	2 - stay put	ZB5AD205	0.017
		2 - spring return from right to left	ZB5AD405	0.020
		3 - stay put	ZB5AD305	0.017
		3 - spring return to centre	ZB5AD505	0.017
		3 - spring return from left to centre	ZB5AD705	0.017
		3 - spring return from right to centre	ZB5AD805	0.017
	Standard handle, blue	2 - stay put	ZB5AD206	0.017
		2 - spring return from right to left	ZB5AD406	0.020
		3 - stay put	ZB5AD306	0.017
		3 - spring return to centre	ZB5AD506	0.017
		3 - spring return from left to centre	ZB5AD706	0.017
		3 - spring return from right to centre	ZB5AD806	0.017
	Long handle, black	2 - stay put	ZB5AJ2	0.017
		2 - spring return from right to left	ZB5AJ4	0.020
		3 - stay put	ZB5AJ3	0.017
		3 - spring return to centre	ZB5AJ5	0.017
		3 - spring return from left to centre	ZB5AJ7	0.017
		3 - spring return from right to centre	ZB5AJ8	0.017



ZB5AJ●



(1) Can only be used for actuation of end of row (side) mounted contacts.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: heads

Heads for selector switches (1) (continued)



ZB5AD39

Knurled knob,
black

2 - stay put



ZB5AD29

0.020

2 - spring return from right
to left

ZB5AD49

0.024

3 - stay put



ZB5AD39

0.020

3 - spring return to centre



ZB5AD59

0.020

3 - spring return from left
to centre

ZB5AD79

0.020

3 - spring return from right
to centre

ZB5AD89

0.020



ZB5AG2

Key switch with
key n° 455 (3) (4)

2 - stay put



ZB5AG2

0.057



ZB5AG02

0.057



ZB5AG4

0.057

2 - spring return from right
to left

ZB5AG6

0.061

3 - stay put



ZB5AG0

0.057



ZB5AG3

0.057



ZB5AG5

0.057



ZB5AG9

0.057



ZB5AG09

0.057

3 - spring return from left
to centre

ZB5AG1

0.057

3 - spring return to centre



ZB5AG7

0.057

3 - spring return from right
to centre

ZB5AG8

0.057



ZB5AG05

0.057



ZB5AG08

0.057

(1) Can only be used for actuation of end of row (side) mounted contacts.

(2) The symbol "A" indicates key withdrawal position(s).

(3) Other key numbers:

- key n° 421E: add suffix **12** to the reference,
- key n° 458A: add suffix **10** to the reference,
- key n° 520E: add suffix **14** to the reference,
- key n° 3131A: add suffix **20** to the reference.

Example:

For a key switch head with key n° 421E, 2-position stay put with key withdrawal from the left-hand position, the reference becomes: **ZB5AG212**.

(4) For specific keys with other numbers, please consult our Customer Care Centre.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: heads



Heads for selector switches (1) (continued)					
Shape of head	Type of operator	Number and type of positions (2)		Reference	Weight kg
	Key switch with key n° 8D1	2 - stay put		ZB5AG2D	0.057
				ZB5AG02D	0.057
				ZB5AG4D	0.057
		2 - spring return from right to left		ZB5AG6D	0.061
				ZB5AG0D	0.057
		3 - stay put		ZB5AG3D	0.057
				ZB5AG5D	0.057
				ZB5AG9D	0.057
				ZB5AG09D	0.057
				ZB5AG03D	0.057
				ZB5AG04D	0.057
				ZB5AG06D	0.057
				ZB5AG1D	0.057
				ZB5AG07D	0.057
		3 - spring return from right to centre		ZB5AG8D	0.057
				ZB5AG08D	0.057
				ZB5AG05D	0.057
		3 - spring return to centre		ZB5AG7D	0.057



Heads for toggle switches					
Shape of head	Description	Lever	Type of position	Reference	Weight kg
	2-position	Black	Stay put	ZB5AD28	0.023
			Spring return	ZB5AD48	0.023
		White	Stay put	ZB5AD2801	0.023
			Stay put	ZB5AD2804	0.023
			Stay put	ZB5AD2806	0.023
		Blue	Stay put	ZB5AD2806	0.023

(1) Can only be used for actuation of end of row (side) mounted contacts.
 (2) The symbol "R" indicates key withdrawal position(s).



Heads for pilot lights

Shape of head	For use with body comprising light source type	Color of lens	Reference	Weight kg
With plain lens				
	With integral LED 	White	ZB5AV013	0.017
		Green	ZB5AV033	0.017
		Red	ZB5AV043	0.017
		Yellow	ZB5AV053	0.017
		Blue	ZB5AV063	0.017
	With integral LED 	White	ZB5CV013	0.020
		Green	ZB5CV033	0.020
		Red	ZB5CV043	0.020
		Yellow	ZB5CV053	0.020
		Blue	ZB5CV063	0.020
		5 colors (1)	ZB5CV003	0.028
		With plain lens, for insertion of legend (2)		
	With integral LED 	White	ZB5AV013E	0.017
		Green	ZB5AV033E	0.017
		Red	ZB5AV043E	0.017
		Yellow	ZB5AV053E	0.017
		Blue	ZB5AV063E	0.017
With grooved lens (3)				
	With integral LED 	White	ZB5AV013S	0.017
		Green	ZB5AV033S	0.017
		Red	ZB5AV043S	0.017
		Yellow	ZB5AV053S	0.017
		Blue	ZB5AV063S	0.017



Heads for spring return illuminated pushbuttons

Shape of head	Type of push	Color	Reference	Weight kg
Only for use with bodies comprising a light source with integral LED				
	Flush, plain lens	White	ZB5AW313	0.017
		Green	ZB5AW333	0.017
		Red	ZB5AW343	0.017
		Yellow	ZB5AW353	0.017
		Blue	ZB5AW363	0.017
	Flush, grooved lens (3)	White	ZB5AW313S	0.016
		Green	ZB5AW333S	0.016
		Red	ZB5AW343S	0.016
		Yellow	ZB5AW353S	0.016
		Blue	ZB5AW363S	0.016
	Flush for insertion of legend (1)	White	ZB5AA18	0.018
		Green	ZB5AA38	0.018
		Red	ZB5AA48	0.018
		Yellow	ZB5AA58	0.018
		Blue	ZB5AA68	0.018
	Projecting	White	ZB5AW113	0.018
		Green	ZB5AW133	0.018
		Red	ZB5AW143	0.018
		Yellow	ZB5AW153	0.018
		Blue	ZB5AW163	0.018
	Flush for insertion of legend (1)	White	ZB5CW313	0.023
		Green	ZB5CW333	0.023
		Red	ZB5CW343	0.023
		Yellow	ZB5CW353	0.023
		Blue	ZB5CW363	0.023



Other versions

Heads for flush pushbuttons with illuminated ring.
Please consult our Customer Care Centre.

(1) Head supplied with 5 different colored lenses (white, green, red, yellow, blue) for insertion of legend. For legend ordering information: see page 24.

(2) For legend ordering information: see page 24.

(3) For use in bright ambient light conditions (for example, outdoors in sunlight).

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: heads

Heads for illuminated selector switches with standard handle

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg
Only for use with bodies comprising a light source with integral LED				
 ZB5AK1263	 2 - stay put	White	ZB5AK1213	0.021
		Green	ZB5AK1233	0.021
		Red	ZB5AK1243	0.021
		Yellow	ZB5AK1253	0.021
		Blue	ZB5AK1263	0.021
 ZB5AK1463	 2 - spring return from right to left	White	ZB5AK1413	0.021
		Green	ZB5AK1433	0.021
		Red	ZB5AK1443	0.021
		Yellow	ZB5AK1453	0.021
		Blue	ZB5AK1463	0.021
	 3 - stay put	White	ZB5AK1313	0.021
		Green	ZB5AK1333	0.021
		Red	ZB5AK1343	0.021
		Yellow	ZB5AK1353	0.021
		Blue	ZB5AK1363	0.021
	 3 - spring return to centre	White	ZB5AK1513	0.021
		Green	ZB5AK1533	0.021
		Red	ZB5AK1543	0.021
		Yellow	ZB5AK1553	0.021
		Blue	ZB5AK1563	0.021
	 3 - spring return from right to centre	White	ZB5AK1813	0.021
		Green	ZB5AK1833	0.021
		Red	ZB5AK1843	0.021
		Yellow	ZB5AK1853	0.021
		Blue	ZB5AK1863	0.021
	 3 - spring return from left to centre	White	ZB5AK1713	0.021
		Green	ZB5AK1733	0.021
		Red	ZB5AK1743	0.021
		Yellow	ZB5AK1753	0.021
		Blue	ZB5AK1763	0.021

Heads for Ø 40 illuminated, latching, mushroom head pushbuttons (1)

Shape of head	Type of push	Color of push	Reference	Weight kg
Only for use with bodies comprising a light source with integral LED				
 ZB5AW743	 Turn to release	White	ZB5AW713	0.022
		Green	ZB5AW733	0.022
		Red	ZB5AW743	0.022
		Yellow	ZB5AW753	0.022
		Blue	ZB5AW763	0.022


(1) Use electrical blocks type ZBE10●, specifically designed for "mounting beneath heads", see page 11.

Control stations and enclosures


Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22


Stations for customer assembly: accessories




ZBZ32




ZBY101




ZBY4140



ZBY2107



ZBZ34



ZBYH101

Standard (30 x 40 mm) legend holders for 8 x 27 mm legends ⁽¹⁾

Description	Legend		Sold in lots of	Unit reference	Weight kg	
	Color	Marking				
Without legend	–	–	10	ZBZ32	0.001	
With blank legend (for engraving)	Black or red background	–	10	ZBY2101	0.002	
	White or yellow background	–	10	ZBY4101	0.002	
With 8 x 27 mm legend (with international marking)	Black or red background	O (black background)	1	ZBY2146	0.002	
		O (red background)	1	ZBY2931	0.002	
		I	1	ZBY2147	0.002	
		II	1	ZBY2148	0.002	
		O-I	1	ZBY2178	0.002	
		I-II	1	ZBY2179	0.002	
		I-O-II	1	ZBY2186	0.002	
		AUTO	1	ZBY2115	0.002	
	STOP	1	ZBY2304	0.002		
	Yellow background		1	ZBY4140 (2)	0.002	
	With 8 x 27 mm legend (with French language marking)	Black or red background (3)	ARRET (red background)	1	ZBY2104	0.002
			ARRET (black background)	1	ZBY0104	0.002
			ARRET GENERAL	1	ZBY2129	0.002
ARRET REARMEMENT			1	ZBY2133	0.002	
ARRET MARCHE			1	ZBY2166	0.002	
ARRIERE			1	ZBY2106	0.002	
AUTO CYCLE-CYCLE			1	ZBY2198	0.002	
AUTO CYCLE-MAIN			1	ZBY2199	0.002	
AUTO-MAIN			1	ZBY2164	0.002	
AUTO-O-MAIN			1	ZBY2185	0.002	
AVANT			1	ZBY2105	0.002	
AVANT-O-ARRIERE			1	ZBY2184	0.002	
C-P-C NORMAL			1	ZBY2165	0.002	
CYCLE-MAIN			1	ZBY2197	0.002	
DECLenchement			1	ZBY2132	0.002	
DEFAUT (black background)			1	ZBY2134	0.002	
DEFAUT (red background)			1	ZBY2135	0.002	
DEPART CYCLE			1	ZBY2195	0.002	
DESCENTE			1	ZBY2108	0.002	
DROITE			1	ZBY2109	0.002	
ENCLenchement			1	ZBY2131	0.002	
EN SERVICE			1	ZBY2111	0.002	
FERMETURE			1	ZBY2114	0.002	
GAUCHE			1	ZBY2110	0.002	
HORS SERVICE			1	ZBY2112	0.002	
HORS-EN			1	ZBY2167	0.002	
LENT			1	ZBY2127	0.002	
MAIN			1	ZBY2116	0.002	
MARCHE			1	ZBY2103	0.002	
MONTEE			1	ZBY2107	0.002	
OUVERTURE			1	ZBY2113	0.002	
PHASE / PHASE			1	ZBY2196	0.002	
REARMEMENT (red bckgrnd.)			1	ZBY2123	0.002	
REARMEMENT (black bckgrnd.)			1	ZBY0123	0.002	
SOUS TENSION			1	ZBY2126	0.002	
VITE	1	ZBY2128	0.002			
Red background	ARRET D'URGENCE	1	ZBY2130 (2)	0.002		

30 x 40 mm legend holders (flush mounting with bezel) for 8 x 27 mm legends

Description	For use with	Color	Sold in lots of	Unit reference	Weight kg
Without legend	Circular heads	—	10	ZBZ34	0.003
	Square heads	—	10	ZBCZ34	0.002
With blank legend	Circular heads	Black or red background	10	ZBY2H101	0.004
		White or yellow background	10	ZBY4H101	0.004
	Square heads	Black or red background	10	ZBCY2H101	0.002
		White or yellow background	10	ZBCY4H101	0.002

(1) Legends: see page 22.

(2) For complying with ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.


(3) "Start" functions: white characters on black background. "Stop" functions: white characters on red background (unless otherwise stated above).

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22


Stations for customer assembly: accessories



ZBY2303



ZBY0140



ZBY2228


Standard (30 x 40 mm) legend holders with 8 x 27 mm legend (continued)

Description	Legend	Marking	Reference	Weight kg
With 8 x 27 mm legend (with English marking)	Black or red background (1)	AUTO-HAND	ZBY2364	0.002
		AUTO-O-HAND	ZBY2385	0.002
		CLOSE	ZBY2314	0.002
		DOWN	ZBY2308	0.002
		FAST	ZBY2328	0.002
		FORWARD	ZBY2305	0.002
		HAND	ZBY2316	0.002
		HAND-OFF-AUTO	ZBY2387	0.002
		INCH	ZBY2321	0.002
		LEFT	ZBY2310	0.002
		OFF	ZBY2312	0.002
		OFF-ON	ZBY2367	0.002
		ON	ZBY2311	0.002
		OPEN	ZBY2313	0.002
		POWER ON	ZBY2326	0.002
		RESET (red background)	ZBY2323	0.002
		RESET (black background)	ZBY2322	0.002
		REVERSE	ZBY2306	0.002
		RIGHT	ZBY2309	0.002
		RUN	ZBY2334	0.002
		SLOW	ZBY2327	0.002
		START	ZBY2303	0.002
		STOP-START	ZBY2366	0.002
		UP	ZBY2307	0.002
	Red background	EMERGENCY STOP	ZBY2330 (2)	0.002
With 8 x 27 mm legend (with German marking)	Black or red background (1)	AB	ZBY2208	0.002
		AUF	ZBY2207	0.002
		AUS	ZBY2204	0.002
		AUS-EIN	ZBY2266	0.002
		AUS-IN BETRIEB	ZBY2267	0.002
		AUS-RUCKSTELLUND	ZBY2233	0.002
		AUSSCHALTEN	ZBY2232	0.002
		AUTO-HAND	ZBY2364	0.002
		AUTO-O-HAND	ZBY2385	0.002
		AUTOZYKL-HAND	ZBY2299	0.002
		AUTOZYKL-1 ZYKL	ZBY2298	0.002
		C-P-C-NORMAL	ZBY2265	0.002
		EIN	ZBY2203	0.002
		EINSCHALTEN	ZBY2231	0.002
		HAND	ZBY2316	0.002
		LANGSAM	ZBY2227	0.002
		LINKS	ZBY2210	0.002
		NOT-AUS (red background)	ZBY2230	0.002
		ÖFFNEN	ZBY2213	0.002
		RECHTS	ZBY2209	0.002
		RUCKSTELLUNG	ZBY2223	0.002
		SCHLIESSEN	ZBY2214	0.002
		SCHNELL	ZBY2228	0.002
		SPANNUNG EIN	ZBY2226	0.002
		STEUERUNG AUS	ZBY2212	0.002
		STEUERUNG EIN	ZBY2211	0.002
		STORUNG (black background)	ZBY2234	0.002
		STORUNG (red background)	ZBY2235	0.002
		VOR	ZBY2205	0.002
		VOR-O-ZURUCK	ZBY2284	0.002
		ZURUCK	ZBY2206	0.002
		ZYKLUS-HAND	ZBY2297	0.002
		ZYKLUS-START	ZBY2295	0.002
	Red background	NOT-HALT	ZBY2229 (2)	0.002
	Yellow background	NOT-HALT	ZBY22420001 (2)	0.002

(1) "Start" functions: white characters on black background. "Stop" functions: white characters on red background (unless otherwise stated above).

(2) For complying with ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

522035



ZALY4

Legends (30 x 42 mm) for engraving				
Description	Color of background	Sold in lots of	Unit reference	Weight kg
Legends for engraving 2 lines of text	Black or red	10	ZALY2	0.001
	White or yellow	10	ZALY4	0.001

Legends (8 x 27 mm) for engraving				
For use with	Color of background	Sold in lots of	Unit reference	Weight kg
30 x 40 mm legend holder	Black or red	10	ZBY0101	0.001
	White or yellow	10	ZBY0102	0.001
	Yellow	10	ZBY0140 (1)	0.001

Sheets of 76 (8 x 27 mm) peel-off legends				
For use with	Supplied with	Sold in lots of	Unit reference	Weight kg
30 x 40 mm legend holders ZBZ32 and ZBZ34	Backing board and protective transparent cover	10	ZBY4100	0.043

8 x 27 mm marked legends (for 30 x 40 mm legend holders ZBZ32 and ZBZ34)				
Language	Color of background	Marking	Reference	Weight kg
International	Black or red (2)	O (black background)	ZBY02146	0.001
		O (red background)	ZBY02931	0.001
		I	ZBY02147	0.001
		II	ZBY02148	0.001
		O-I	ZBY02178	0.001
		I-II	ZBY02179	0.001
		I-O-II	ZBY02186	0.001
		AUTO	ZBY02115	0.001
		STOP	ZBY02304	0.001

French	Black or red (2)	ARRET (red background)	ZBY02104	0.001
		ARRET (black background)	ZBY00104	0.001
		ARRET GENERAL	ZBY02129	0.001
		ARRET REARMEMENT	ZBY02133	0.001
		ARRET-MARCHE	ZBY02166	0.001
		ARRIERE	ZBY02106	0.001
		AUTO CYCLE-CYCLE	ZBY02198	0.001
		AUTO CYCLE-MAIN	ZBY02199	0.001
		AUTO-MAIN	ZBY02164	0.001
		AUTO-O-MAIN	ZBY02185	0.001
		AVANT	ZBY02105	0.001
		AVANT-O-ARRIERE	ZBY02184	0.001
		C-P-C-NORMAL	ZBY02165	0.001
		CYCLE-MAIN	ZBY02197	0.001
		DECLenchement	ZBY02132	0.001
		DEFAULT (black background)	ZBY02134	0.001
		DEFAULT (red background)	ZBY02135	0.001
		DEPART CYCLE	ZBY02195	0.001
		DESCENTE	ZBY02108	0.001
		DROITE	ZBY02109	0.001
		ENCLenchement	ZBY02131	0.001
		EN SERVICE	ZBY02111	0.001
		FERMETURE	ZBY02114	0.001
		GAUCHE	ZBY02110	0.001
		HORS SERVICE	ZBY02112	0.001
		HORS-EN	ZBY02167	0.001
		LENT	ZBY02127	0.001
		MAIN	ZBY02116	0.001
		MARCHE	ZBY02103	0.001
		MONTEE	ZBY02107	0.001
		OUVERTURE	ZBY02113	0.001
		PHASE / PHASE	ZBY02196	0.001
		REARMEMENT (red background)	ZBY02123	0.001
		REARMEMENT (black background)	ZBY00123	0.001
		SOUS TENSION	ZBY02126	0.001
		VITE	ZBY02128	0.001
	Red	ARRET D'URGENCE	ZBY02130 (1)	0.001

(1) For complying with ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

(2) "Start" functions: white characters on black background. "Stop" functions: white characters on red background (unless otherwise stated above).

815339



ZBY02178

815340



ZBY0●104

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: accessories

8 x 27 mm marked legends (for 30 x 40 mm legend holders ZBZ32 and ZBZ34) (continued)

Language	Color of background	Marking	Reference	Weight kg
English	Black or red (1)	AUTO-HAND	ZBY02364	0.001
		AUTO-O-HAND	ZBY02385	0.001
		CLOSE	ZBY02314	0.001
		DOWN	ZBY02308	0.001
		FAST	ZBY02328	0.001
		FORWARD	ZBY02305	0.001
		HAND	ZBY02316	0.001
		HAND-OFF-AUTO	ZBY02387	0.001
		INCH	ZBY02321	0.001
		LEFT	ZBY02310	0.001
		OFF	ZBY02312	0.001
		OFF-ON	ZBY02367	0.001
		ON	ZBY02311	0.001
		OPEN	ZBY02313	0.001
		POWER ON	ZBY02326	0.001
		RESET (red background)	ZBY02323	0.001
		RESET (black background)	ZBY02322	0.001
		REVERSE	ZBY02306	0.001
		RIGHT	ZBY02309	0.001
		RUN	ZBY02334	0.001
		SLOW	ZBY02327	0.001
		START	ZBY02303	0.001
		STOP-START	ZBY02366	0.001
		UP	ZBY02307	0.001
	Red	EMERGENCY STOP	ZBY02330 (2)	0.001
German	Black or red (1)	AB	ZBY02208	0.001
		AUF	ZBY02207	0.001
		AUS	ZBY02204	0.001
		AUS-EIN	ZBY02266	0.001
		AUS-IN BETRIEB	ZBY02267	0.001
		AUS-RUCKSTELLUNG	ZBY02233	0.001
		AUSSCHALLEN	ZBY02232	0.001
		AUTO-HAND	ZBY02364	0.001
		AUTO-O-HAND	ZBY02385	0.001
		AUTOZYKL-HAND	ZBY02299	0.001
		AUTOZYKL- 1 ZYKL	ZBY02298	0.001
		C-P-C-NORMAL	ZBY02265	0.001
		EIN	ZBY02203	0.001
		EINSCHALTEN	ZBY02231	0.001
		HAND	ZBY02316	0.001
		LANGSAM	ZBY02227	0.001
		LINKS	ZBY02210	0.001
		NOT-AUS (red background)	ZBY02230	0.001
		ÖFFNEN	ZBY02213	0.001
		RECHTS	ZBY02209	0.001
		RUCKSTELLUNG	ZBY02223	0.001
		SCHLIESSEN	ZBY02214	0.001
		SCHNELL	ZBY02228	0.001
		SPANNUNG EIN	ZBY02226	0.001
		STEUERUNG AUS	ZBY02212	0.001
		STEUERUNG EIN	ZBY02211	0.001
		STORUNG (black background)	ZBY02234	0.001
		STORUNG (red background)	ZBY02235	0.001
		VOR	ZBY02205	0.001
		VOR-O-ZURUCK	ZBY02284	0.001
		ZURUCK	ZBY02206	0.001
		ZYKLUS-HAND	ZBY02297	0.001
		ZYKLUS-START	ZBY02295	0.001
	Red	NOT-HALT	ZBY02229 (2)	0.001
	Yellow	NOT-HALT	ZBY022420001 (2)	0.001

(1) "Start" functions: white characters on black background. "Stop" functions: white characters on red background (unless otherwise stated above).

(2) For complying with ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: accessories

Legends for pushbuttons, switches and pilot lights XB5 A

Description	Marking	Sold in lots of	Unit reference	Weight kg
Sheets of 66 circular peel-off transparent self-adhesive legends	Without	10	ZBY1101	0.017
	International	10	ZBY1146	0.017
	I	10	ZBY1147	0.017
	II	10	ZBY1148	0.017
	III	10	ZBY1149	0.017
	AUTO	10	ZBY1115	0.017
	STOP	10	ZBY1304	0.017
	↑	10	ZBY1912	0.017
	French	10	ZBY1104	0.017
	ARRÊT	10	ZBY1106	0.017
	AVANT	10	ZBY1105	0.017
	AUTO	10	ZBY1115	0.017
	DESCENTE	10	ZBY1108	0.017
	MAIN	10	ZBY1116	0.017
	MARCHE	10	ZBY1103	0.017
	MONTEE	10	ZBY1107	0.017
	English	10	ZBY1316	0.017
	OFF	10	ZBY1312	0.017
	ON	10	ZBY1311	0.017
	START	10	ZBY1303	0.017
	German	10	ZBY1208	0.017
	AUF	10	ZBY1207	0.017
	AUS	10	ZBY1204	0.017
	EIN	10	ZBY1203	0.017
	ZU	10	ZBY1214	0.017
Strip of 66 square peel-off transparent self-adhesive legends	Without	10	ZBCY1101	0.017

"SIS Label" labelling software (for legend sheets ZBY1101, ZBY4100 and ZBCY1101)


Application	Reference	Weight kg
Legend design for English, French, German, Italian and Spanish	ZBY001, ZBY0101, ZBY0102, ZBY1101, ZBY4100, ZBY5100, ZBY5101 AND ZBY5102	XBY2U 0.100

Circular yellow legends for mushroom head pushbuttons


Used for "Emergency stop" function				
Diameter mm	Conforming to standards	Marking on yellow background	Reference (1)	Weight kg
60	EN/IEC 60204-1 and EN/ISO 13850	–	ZBY9140	0.004
		ARRET D'URGENCE	ZBY9130	0.004
		EMERGENCY STOP	ZBY9330	0.004
		NOT-HALT	ZBY9230	0.004
		PARADA DE EMERGENCIA	ZBY9430	0.004
		ARRESTO DI EMERGENZA	ZBY9630	0.004
		–	ZBY9121	0.004
60 (2)	EN/IEC 60204-1 and EN/ISO 13850	ARRET D'URGENCE	ZBY9120	0.004
		EMERGENCY STOP	ZBY9320	0.004
		NOT-HALT	ZBY9220	0.004
		PARADA DI EMERGENCIA	ZBY9420	0.004
		ARRESTO DE EMERGENZA	ZBY9620	0.004
		–	ZBY8140	0.008
		ARRET D'URGENCE	ZBY8130	0.008
90	EN/IEC 60204-1 and EN/ISO 13850	EMERGENCY STOP	ZBY8330	0.008
		NOT-HALT	ZBY8230	0.008
		PARADA DE EMERGENCIA	ZBY8430	0.008
		ARRESTO DI EMERGENZA	ZBY8630	0.008
		–	ZBY9101	0.004
		COUPURE D'URGENCE	ZBY9160	0.004
		EMERGENCY SWITCHING OFF	ZBY9360	0.004
60	EN/IEC 60204-1	NOT-AUS	ZBY9260	0.004
		DESCONEXION DE EMERGENCIA	ZBY9460	0.004
		INTERRUZIONE DI EMERGENZA	ZBY9660	0.004
		–	ZBY8101	0.008
		COUPURE D'URGENCE	ZBY8160	0.008
		EMERGENCY SWITCHING OFF	ZBY8360	0.008
		NOT-AUS	ZBY8260	0.008
90	EN/IEC 60204-1	DESCONEXION DE EMERGENCIA	ZBY8460	0.008
		INTERRUZIONE DI EMERGENZA	ZBY8660	0.008
		–	ZBY8660	0.008

(1) For complying with ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

(2) 3D legends for Emergency stop pushbuttons.

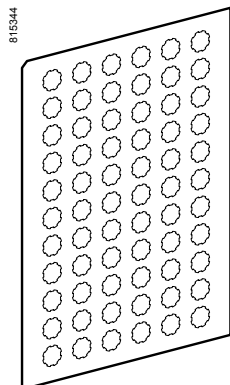


ZBY1000



XBY2U



ZBY9130



ZBY9160


Control stations and enclosures

Plastic control stations XALD and XALK

For Harmony® XB5 control and signaling units Ø 22

Stations for customer assembly: accessories

815197

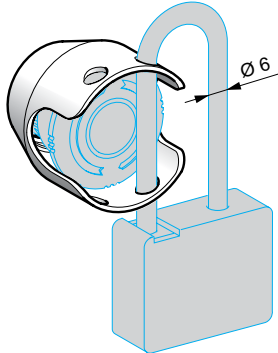

ZBZ160●

815347



ZBA●

815348



ZBL●

815349



ZBA333

Metal guards (1)

Description	For use with	Color	Reference	Weight kg
Metal guards Padlockable	Emergency stop function only with the following Ø 40 trigger action pushbuttons: XB5AT8●, XB5AS8●, XB5AS9●, ZB5AT8●, ZB5AS8●, ZB5AS9●.	Chromium plated	ZBZ1600	0.046
		Black	ZBZ1602	0.046
		Red	ZBZ1604	0.046
		Blue	ZBZ1606	0.046

Pushbutton caps - unmarked

For use with	Cap Type	Color	Sold in lots of	Unit reference	Weight kg
Circular pushbutton heads ZB5AA supplied without cap	Flush	White	10	ZBA1	0.001
		Black	10	ZBA2	0.001
		Green	10	ZBA3	0.001
		Red	10	ZBA4	0.001
		Yellow	10	ZBA5	0.001
		Blue	10	ZBA6	0.001
		6 colors (2)	1	ZBA9	0.006
	Projecting	White	10	ZBL1	0.001
		Black	10	ZBL2	0.001
		Green	10	ZBL3	0.001
		Red	10	ZBL4	0.001
		Yellow	10	ZBL5	0.001
		Blue	10	ZBL6	0.001
		6 colors (2)	1	ZBL9	0.006

Pushbutton caps - marked (3) (sold in lots of 10)

For use with	Type of push	Marking Text	Color	Color of cap	Unit reference	Weight kg
Circular pushbutton heads ZB5AA supplied without cap	Flush	I	White	Green	ZBA331	0.001
			Black	White	ZBA131	0.001
		II	White	Green	ZBA336	0.001
			Black	White	ZBA136	0.001
		III	White	Green	ZBA337	0.001
			Black	White	ZBA137	0.001
		IV	White	Green	ZBA338	0.001
			Black	White	ZBA138	0.001
		START	White	Green	ZBA333	0.001
			Black	White	ZBA133	0.001
		ON	White	Green	ZBA341	0.001
			Black	White	ZBA141	0.001
		MARCHE	White	Green	ZBA342	0.001
			Black	White	ZBA142	0.001
		T	White	Black	ZBA245	0.001
			Black	White	ZBA145	0.001
		UP	Black	White	ZBA343	0.001
		DOWN	White	Black	ZBA344	0.001
		↑	White	Black	ZBA335	0.001
			Black	White	ZBA334	0.001
		O	White	Red	ZBA432	0.001
			Black	Black	ZBA232	0.001
		ARRET	White	Red	ZBA433	0.001
			Black	Black	ZBA233	0.001
		STOP	White	Red	ZBA434	0.001
			Black	Black	ZBA234	0.001
		OFF	White	Red	ZBA435	0.001
			Black	Black	ZBA235	0.001
		⚠	White	Green	ZBA346	0.001
		R	White	Blue	ZBA639	0.001
		+	White	Black	ZBA2934	0.001
		-	White	Black	ZBA2935	0.001

(1) These guards can be used in conjunction with a legend holder, but only those for mounting directly beneath the head. See page 11.

(2) Set of 6 different colored caps: white, black, green, red, yellow, blue.


(3) Can be clipped-in at 90° steps through 360°.



ZB2BP01●




ZBV01●3



ZB5AZ905



ZB5SZ3



ZBZ●8



ZBG455

Colored boots

Description	Color	Sold in lots of	Unit reference	Weight kg
Colored boots (can be replaced without dismantling the head)	Black	10	ZB2BP012	0.003
	Green	10	ZB2BP013	0.003
	Red	10	ZB2BP014	0.003
	Yellow	10	ZB2BP015	0.003
	Blue	10	ZB2BP016	0.003

Lens caps

Circular lens caps for light sources with integral LED

Pilot lights	White	10	ZBV0113	0.002
	Green	10	ZBV0133	0.002
	Red	10	ZBV0143	0.002
	Yellow	10	ZBV0153	0.002
	Blue	10	ZBV0163	0.002
	5 different colored grooved lenses (1)	1	ZBV0103S	0.010

Illuminated pushbuttons, with flush push	White	10	ZBW9113	0.002
	Green	10	ZBW9133	0.002
	Red	10	ZBW9143	0.002
	Yellow	10	ZBW9153	0.002
	Blue	10	ZBW9163	0.002

Illuminated pushbuttons, with projecting push	White	10	ZBW9313	0.002
	Green	10	ZBW9333	0.002
	Red	10	ZBW9343	0.002
	Yellow	10	ZBW9353	0.002
	Blue	10	ZBW9363	0.002

Square lens caps for light sources with integral LED

Pilot lights	White	10	ZBCV0113	0.002
	Green	10	ZBCV0133	0.002
	Red	10	ZBCV0143	0.002
	Yellow	10	ZBCV0153	0.002
	Blue	10	ZBCV0163	0.002

Illuminated pushbuttons, with flush push	White	10	ZBCW9113	0.002
	Green	10	ZBCW9133	0.002
	Red	10	ZBCW9143	0.002
	Yellow	10	ZBCW9153	0.002
	Blue	10	ZBCW9163	0.002

Illuminated pushbuttons, with projecting push	White	10	ZBCW9313	0.002
	Green	10	ZBCW9333	0.002
	Red	10	ZBCW9343	0.002
	Yellow	10	ZBCW9353	0.002
	Blue	10	ZBCW9363	0.002

Miscellaneous accessories

Description	For use with	Sold in lots of	Color	Unit reference	Weight kg
Bezel tool	ZB5AZ901 head	10	—	ZB5AZ905	0.016
Plastic blanking plugs (with fixing nut)	Square shape for Ø 22 units (2)	10	Black	ZB5SZ5	0.009
	Circular shape for Ø 22 units	10	Black	ZB5SZ3	0.009
Terminal branch	XALD and XALK control stations	10		XALZ09	0.003
Bellows seals (IP 69K) (3)	Control station with 1 cut-out, installed in harsh environment + Emergency Stop pushbutton type ZB5 (see page 14)	2	Black	ZBZ28	0.009
			Yellow	ZBZ58	0.009

Replacement keys for Emergency stop key release heads and key switches

Description	Key number	Reference	Weight kg
Set of 2 keys (4)	455	ZBG455	0.013
	421E	ZBG421E	0.014
	458A	ZBG458A	0.014
	520E	ZBG520E	0.014
	3131A	ZBG3131A	0.014

(1) Set of 5 different colored lenses: white, green, red, yellow and blue.

(2) Body/fixing collar ZB5AZ009 necessary for fixation, to be ordered separately.

(3) Not compatible with Ø 30 mm Emergency Stop heads.

(4) Other key numbers are available.


Search, visualize, and download

Use your tablet or your PC to quickly access detailed and comprehensive information on our products




Tablets


Application name: "Automation Library by Schneider Electric"

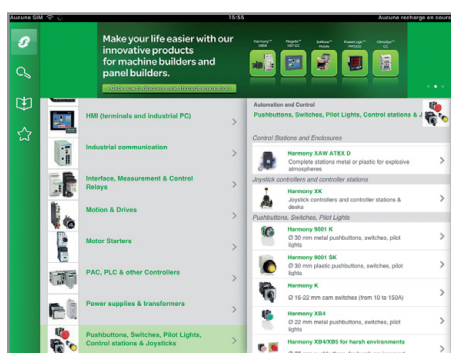

Product ranges
displayed by function

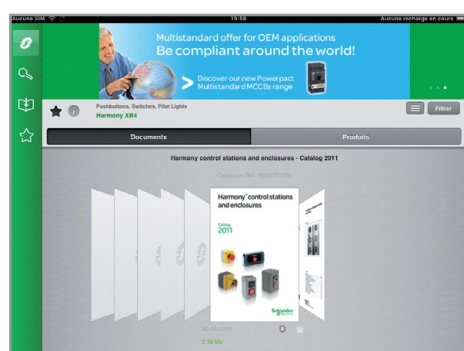


Dynamic catalogs
(hyperlinks, video, ...)

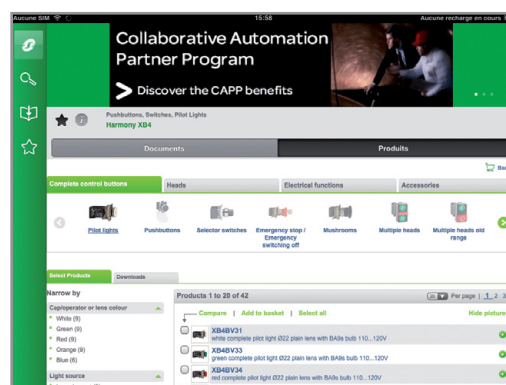


Product selector: dynamic filters to
get easily your part number

Personal computer


Path: www.schneider-electric.com > **Products and Services** > Automation and control > Product offer

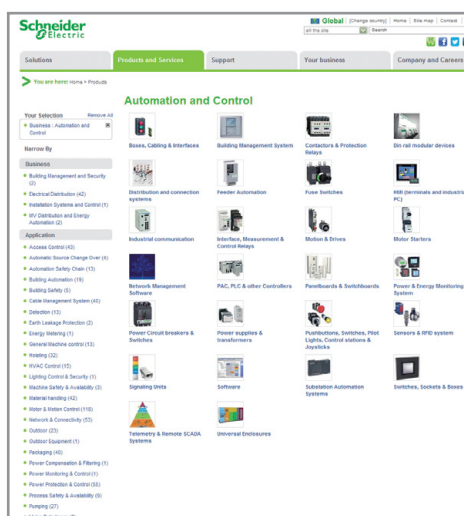

Product ranges
displayed by function

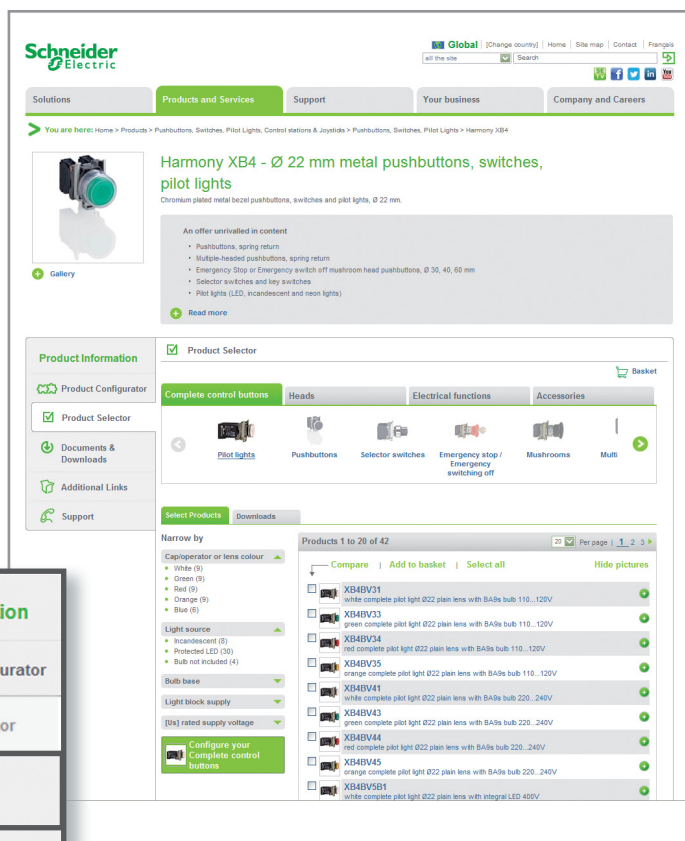

Dynamic catalogs
(hyperlinks, video, ...)

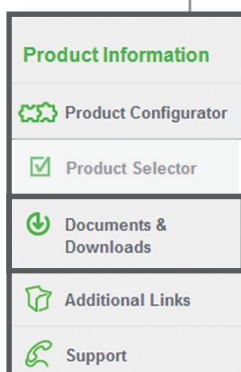


Product selector: dynamic filters to
get easily your part number

Access product references with adapted tools








Path: www.schneider-electric.com > **Products and Services** > Automation and control > ... > Product offer

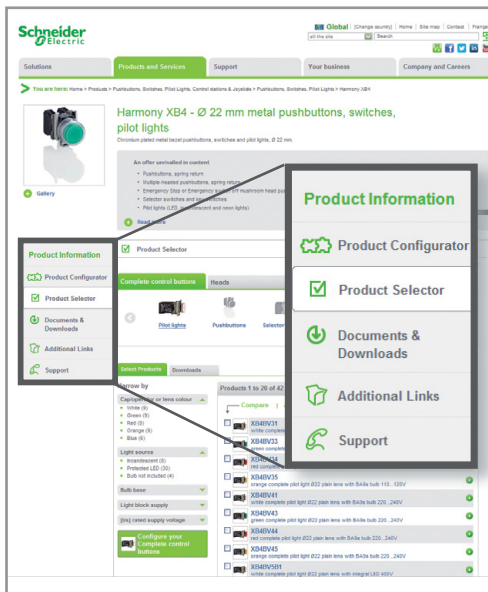

Graphic product configurator
Select the right product with just a few clicks

Dynamic product selector
Visualize product characteristics and dimensions

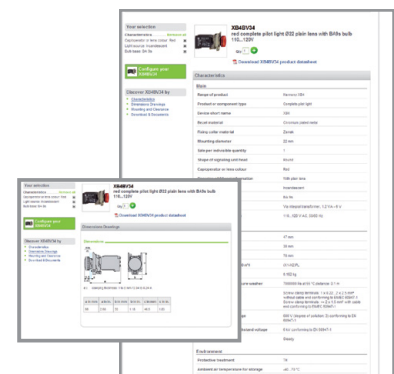

Product data sheet
with technical characteristics
and dimensions

Dimensions

**Technical
characteristics**



Visualize and download catalogs,
technical publications, certificates, etc.




Compare, select, and compile




Path: www.schneider-electric.com > **Products and Services** > Automation and control > ... > Harmony XB4*

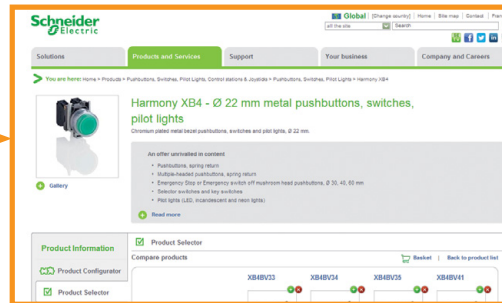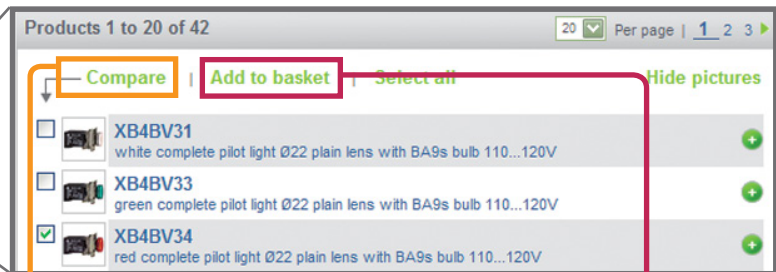

Compare
technical
characteristics

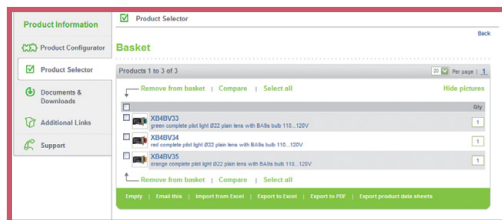

Select
and store
your products
into
the basket



Compile
data sheets
in a unique
document




* Example of research on a product

Check the product status, design your equipment




Path: www.schneider-electric.com > **Support** > Product Substitution Tool

Path: www.schneider-electric.com > **Support** > CAD files

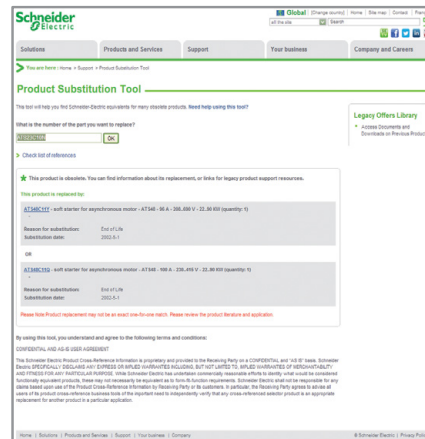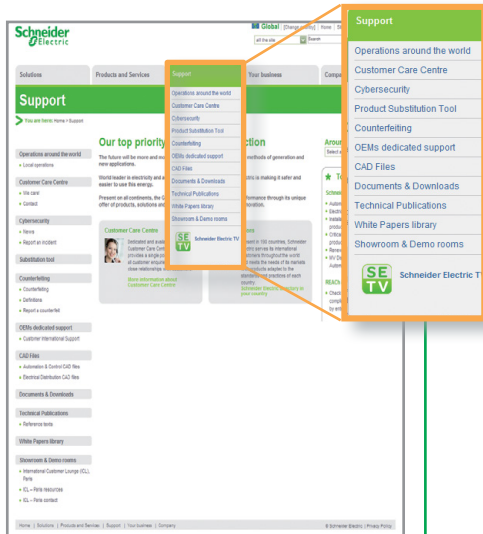

Product status:
indicate whether the product
is still commercialized.
Otherwise, the tool suggests a
product substitution.

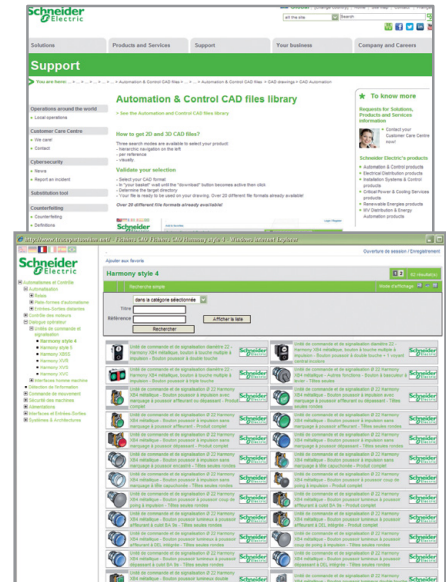

CAD files:
available in various formats
they will be easily integrated
into your installation design
software.

Schneider
Electric

ZBA333	26	ZBY00104	23	ZBY2131	21	ZBY02223	24	ZBY2326	22
ZBA334	26	ZBY0123	21	ZBY02131	23	ZBY2226	22	ZBY02326	24
ZBA335	26	ZBY00123	23	ZBY2132	21	ZBY02226	24	ZBY2327	22
ZBA336	26	ZBY0140	23	ZBY02132	23	ZBY2227	22	ZBY02327	24
ZBA337	26	ZBY1101	25	ZBY2133	21	ZBY02227	24	ZBY2328	22
ZBA338	26	ZBY1103	25	ZBY02133	23	ZBY2228	22	ZBY02328	24
ZBA341	26	ZBY1104	25	ZBY2134	21	ZBY02228	24	ZBY2330	22
ZBA342	26	ZBY1105	25	ZBY02134	23	ZBY2229	22	ZBY02330	24
ZBA343	26	ZBY1106	25	ZBY2135	21	ZBY02229	24	ZBY2334	22
ZBA344	26	ZBY1107	25	ZBY02135	23	ZBY2230	22	ZBY02334	24
ZBA346	26	ZBY1108	25	ZBY2146	21	ZBY02230	24	ZBY2364	22
ZBA432	26	ZBY1115	25	ZBY02146	23	ZBY2231	22	ZBY02364	24
ZBA433	26	ZBY1116	25	ZBY2147	21	ZBY02231	24	ZBY2366	22
ZBA434	26	ZBY1146	25	ZBY02147	23	ZBY2232	22	ZBY02366	24
ZBA435	26	ZBY1147	25	ZBY2148	21	ZBY02232	24	ZBY2367	22
ZBA639	26	ZBY1148	25	ZBY02148	23	ZBY2233	22	ZBY02367	24
ZBA2934	26	ZBY1149	25	ZBY2164	21	ZBY02233	24	ZBY2385	22
ZBA2935	26	ZBY1203	25	ZBY02164	23	ZBY2234	22	ZBY02385	24
ZBCV0113	27	ZBY1204	25	ZBY2165	21	ZBY02234	24	ZBY2387	22
ZBCV0133	27	ZBY1207	25	ZBY02165	23	ZBY2235	22	ZBY02387	24
ZBCV0143	27	ZBY1208	25	ZBY2166	21	ZBY02235	24	ZBY2931	21
ZBCV0153	27	ZBY1214	25	ZBY02166	23	ZBY2265	22	ZBY02931	23
ZBCV0163	27	ZBY1303	25	ZBY2167	21	ZBY02265	24	ZBY4100	23
ZBCW9113	27	ZBY1304	25	ZBY02167	23	ZBY2266	22	ZBY4101	21
ZBCW9133	27	ZBY1311	25	ZBY2178	21	ZBY02266	24	ZBY4140	21
ZBCW9143	27	ZBY1312	25	ZBY02178	23	ZBY2267	22	ZBY8101	25
ZBCW9153	27	ZBY1316	25	ZBY2179	21	ZBY02267	24	ZBY8130	25
ZBCW9163	27	ZBY1912	25	ZBY02179	23	ZBY2284	22	ZBY8140	25
ZBCW9313	27	ZBY2101	21	ZBY2184	21	ZBY02284	24	ZBY8160	25
ZBCW9333	27	ZBY2103	21	ZBY02184	23	ZBY2295	22	ZBY8230	25
ZBCW9343	27	ZBY02103	23	ZBY2185	21	ZBY02295	24	ZBY8260	25
ZBCW9353	27	ZBY2104	21	ZBY02185	23	ZBY2297	22	ZBY8330	25
ZBCW9363	27	ZBY02104	23	ZBY2186	21	ZBY02297	24	ZBY8360	25
ZBCY2H101	21	ZBY2105	21	ZBY02186	23	ZBY2298	22	ZBY8430	25
ZBCY4H101	21	ZBY02105	23	ZBY2195	21	ZBY02298	24	ZBY8460	25
ZBCY1101	25	ZBY2106	21	ZBY02195	23	ZBY2299	22	ZBY8630	25
ZBCZ34	21	ZBY02106	23	ZBY2196	21	ZBY02299	24	ZBY8660	25
ZBE101	11	ZBY2107	21	ZBY02196	23	ZBY2303	22	ZBY9101	25
ZBE102	11	ZBY02107	23	ZBY2197	21	ZBY02303	24	ZBY9120	25
ZBG421E	27	ZBY2108	21	ZBY02197	23	ZBY2304	21	ZBY9121	25
ZBG455	27	ZBY02108	23	ZBY2198	21	ZBY02304	23	ZBY9130	25
ZBG458A	27	ZBY2109	21	ZBY02198	23	ZBY2305	22	ZBY9140	25
ZBG520E	27	ZBY02109	23	ZBY2199	21	ZBY02305	24	ZBY9160	25
ZBG3131A	27	ZBY2110	21	ZBY02199	23	ZBY2306	22	ZBY9220	25
ZBL●	26	ZBY02110	23	ZBY2203	22	ZBY02306	24	ZBY9230	25
ZBV0103S	27	ZBY2111	21	ZBY02203	24	ZBY2307	22	ZBY9260	25
ZBV0113	27	ZBY02111	23	ZBY2204	22	ZBY02307	24	ZBY9320	25
ZBV0133	27	ZBY2112	21	ZBY02204	24	ZBY2308	22	ZBY9330	25
ZBV0143	27	ZBY02112	23	ZBY2205	22	ZBY02308	24	ZBY9360	25
ZBV0153	27	ZBY2113	21	ZBY02205	24	ZBY2309	22	ZBY9420	25
ZBV0163	27	ZBY02113	23	ZBY2206	22	ZBY02309	24	ZBY9430	25
ZBVB●	11	ZBY2114	21	ZBY02206	24	ZBY2310	22	ZBY9460	25
ZBVG●	11	ZBY02114	23	ZBY2207	22	ZBY02310	24	ZBY9620	25
ZBVM●	11	ZBY2115	21	ZBY02207	24	ZBY2311	22	ZBY9630	25
ZBW9113	27	ZBY02115	23	ZBY2208	22	ZBY02311	24	ZBY9660	25
ZBW9133	27	ZBY2116	21	ZBY02208	24	ZBY2312	22	ZBY22420001	22
ZBW9143	27	ZBY02116	23	ZBY2209	22	ZBY02312	24	ZBY022420001	24
ZBW9153	27	ZBY2123	21	ZBY02209	24	ZBY2313	22	ZBZ28	27
ZBW9163	27	ZBY02123	23	ZBY2210	22	ZBY02313	24	ZBZ32	21
ZBW9313	27	ZBY2126	21	ZBY02210	24	ZBY2314	22	ZBZ34	21
ZBW9333	27	ZBY02126	23	ZBY2211	22	ZBY02314	24	ZBZ58	27
ZBW9343	27	ZBY2127	21	ZBY02211	24	ZBY2316	22	ZBZ1600	26
ZBW9353	27	ZBY02127	23	ZBY2212	22	ZBY02316	24	ZBZ1602	26
ZBW9363	27	ZBY2128	21	ZBY02212	24	ZBY2321	22	ZBZ1604	26
ZBY2H101	21	ZBY02128	23	ZBY2213	22	ZBY02321	24	ZBZ1606	26
ZBY4H101	21	ZBY2129	21	ZBY02213	24	ZBY2322	22	ZBZVG	11
ZBY0101	23	ZBY02129	23	ZBY2214	22	ZBY02322	24	ZBZVM	11
ZBY0102	23	ZBY02130	23	ZBY02214	24	ZBY2323	22	ZENL1111	11
ZBY0104	21	ZBY2130	21	ZBY2223	22	ZBY02323	24	ZENL1121	11



Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Reuil-Malmaison
France

www.schneider-electric.com/control

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric
Printed by:

DIA5ED2130508EN