

FRONT VIEW



RACK HEIGHT	
U	mm [inch]
42U	1991 [78.39]
45U	2124 [83.64]
48U	2258 [88.90]
52U	2436 [95.91]



RACK DEPTH	
mm [inch]	
825 [32.48]	
1070 [42.13]	
1200 [47.24]	
1200 [47.24]	

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
4. OVERALL CONTAINMENT HEIGHT DIMENSION MAY VARY AS PER THE RACK SELECTED.
48U HEIGHT RACK SHOWN FOR TYPICAL ARRANGEMENT. UP TO 52U HEIGHT CAN BE ACCOMMODATED.
TWO HEIGHT ADAPTERS ARE REQUIRED FOR 52U RACKS. REFER TO TABLE FOR DETAILS.
5. THIS DIMENSION MAY VARY AS PER THE DEPTH OF THE RACK SELECTED. 1070 [42.13] DEPTH RACK SHOWN FOR TYPICAL ARRANGEMENT
6. THIS DRAWING IS FOR TYPICAL CONFIGURATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE:
NetShelter Aisle CONTAINMENT Gen 2
DUAL ROW CEILING ENCLOSURE MOUNTED
WITH 20 RACKS PER ROW
FRONT VIEW

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 3

DWG NO: NSACDRDDC40RACKS

DRAWN BY: JAYAPRAKASH 28-MAR-24

ENGINEER: Jiabo He 28-MAR-24


APPROVED BY: Pankaj GHADGE 28-MAR-24

REV. 0

FIRST

ANGLE

PROJ

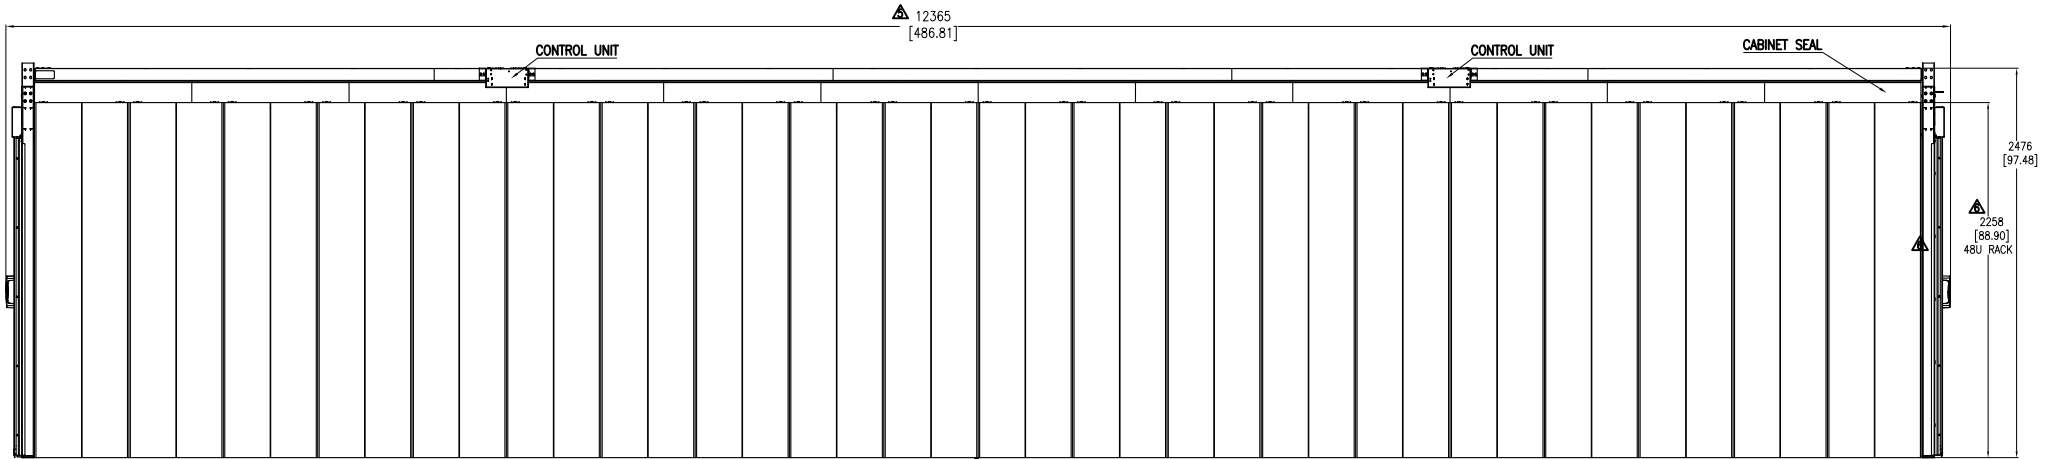

RIGHT SIDE VIEW

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
4. WEIGHT – REFER TO THE RESPECTIVE SUBMITTALS.
- ⚠ THIS DIMENSION MAY VARY AS PER RACK WIDTH AND NUMBER OF RACKS. SHOWN TYPICAL ARRANGEMENT FOR 20 RACKS/ROW OF 600mm WIDE.
- ⚠ SHOWN TYPICAL ARRANGEMENT FOR 48U RACKS.
7. THIS DRAWING IS FOR TYPICAL CONFIGURATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE:
NetShelter Aisle CONTAINMENT Gen 2
DUAL ROW CEILING ENCLOSURE MOUNTED
WITH 20 RACKS PER ROW
RIGHT SIDE VIEW

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 3

DWG NO: NSACDRDDC40RACKS

DRAWN BY: JAYAPRAKASH 28-MAR-24

ENGINEER: Jiabo He 28-MAR-24


APPROVED BY: Pankaj GHADGE 28-MAR-24

REV. 0

FIRST

ANGLE

PROJ

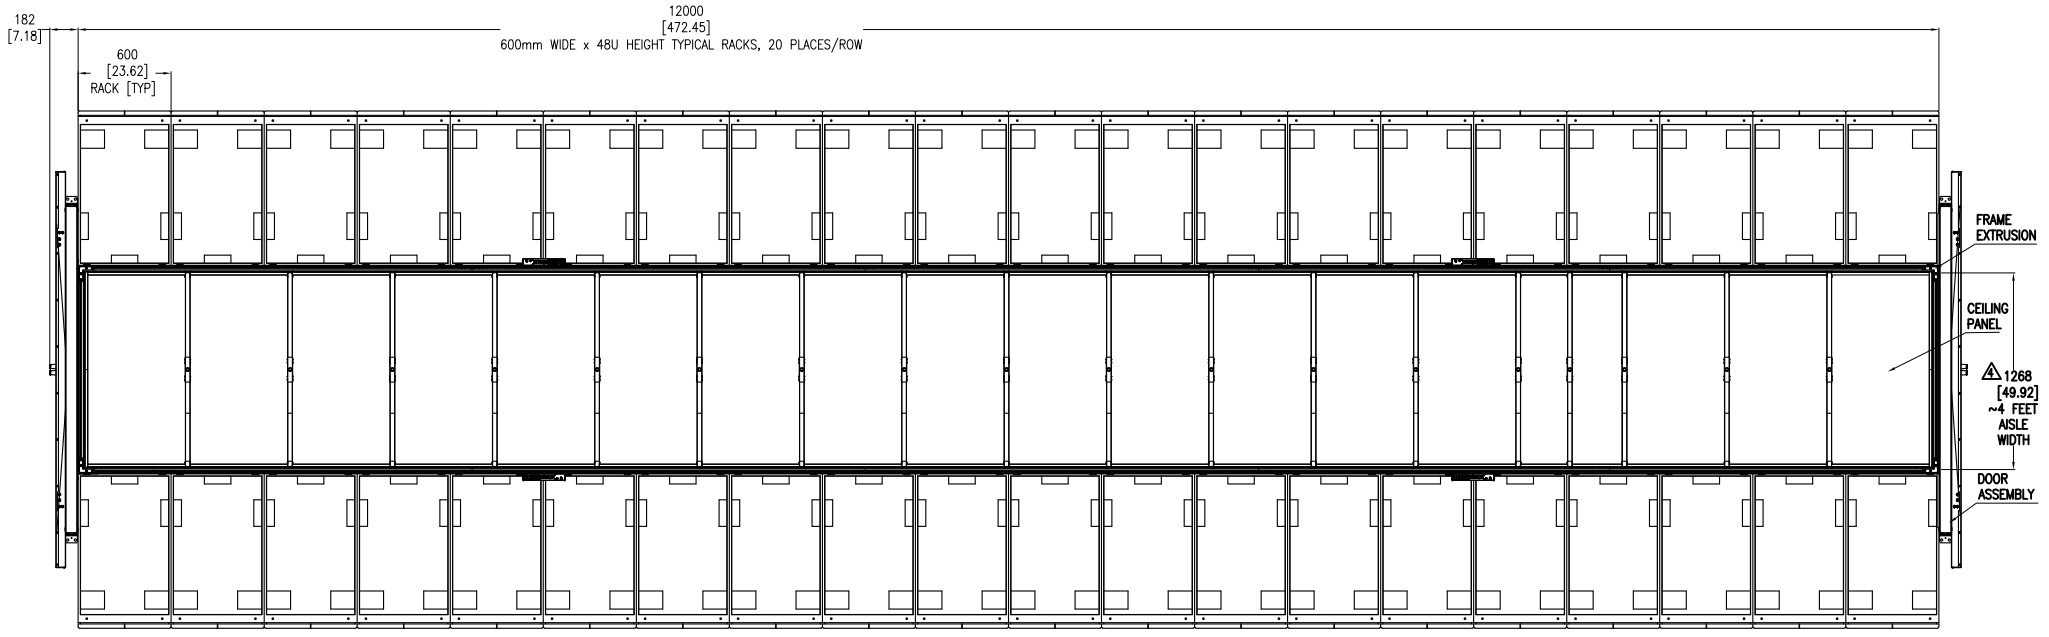

TOP VIEW



AISLE WIDTH	
Feet	mm
~3	972
~4	1268
~6	1860

NOTES:

1. COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL REGULATIONS.
 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
 3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- ⚠️ ACROSS AISLE DIMENSION MAY VARY AS PER THE REQUIREMENT. TABLE SHOWS STANDARD CONFIGURATION. PANEL IS TO BE CUT TO MATCH THE WIDTH FOR DIMENSIONS OTHER THAN ~4 FEET & ~6 FEET.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE:
NetShelter Aisle CONTAINMENT Gen 2
DUAL ROW CEILING ENCLOSURE MOUNTED
WITH 20 RACKS PER ROW
TOP VIEW

PROJECT: SUBMITTAL DRAWINGS SHEET 3 OF 3

DWG NO:	NSACDRDDC40RACKS	REV.	0
DRAWN BY:	JAYAPRAKASH	28-MAR-24	FIRST
ENGINEER:	Jiabo He	28-MAR-24	ANGLE
APPROVED BY:	Pankaj GHADGE	28-MAR-24	PROJ