

Smart-UPS SMT X413

The first cloud-enabled UPS with audible alarm disabled for distributed IT

Life Is On Schneider



EcoStruxure Ready Smart-UPS The First Cloud-enabled UPS For Distributed IT

APC™ award-winning Smart-UPS™ is the most popular UPS in the world for servers, storage and network power protection. Smart-UPS provide availability and manageability to your network allowing you to focus on business growth instead of business downtime. Trusted to protect critical data and equipment from power problems by supplying clean and reliable network-grade power.

All Smart-UPS are EcoStruxure™ Ready and offer multiple monitoring options scalable to your needs.

The EcoStruxure Ready Smart-UPS Web Portal is designed for essential monitoring, allowing you to view the status of your UPS health. Easy-to-use network connectivity provides added value — and more important — added peace of mind.

Register your device on the Smart-UPS Web Portal now, to get free remote UPS monitoring when under warranty coverage.





The World's Most Popular UPS Just Got Smarter

EcoStruxure Ready Smart-UPS Portal



Connect via the SmartConnect Ethernet Port

- Web Portal interface is accessible from any internet connected device, on-site or mobile
- Simpleaccountbgin and registration
- Proactive actionable alerts and lifecycle recommendations
- No special software, SNMP trap setup or coding required
- Adhere to the latest industry standards in secure data collection
- Cloud-monitoring provided via the Web Portal when under Product or Extended Warranty

Features

Connectivity Options

Connect to either the Smart-UPS Web Portal or to EcoStruxure IT via the SmartConnect Ethernet Port for remote UPS monitoring

Pure Sinewave

A pure form of sinewave designed to emulate utility power, will support your device upon battery backup

Intelligent BatteryManagement

Temperature compensated charging extends life and advanced algorithms recommend replacement date

High-efficiency Greenmode

Optimum efficiency which saves on utility and cooling costs

Network-gradePower

Provides stable power conditions by filtering noise, automatic voltage regulation (AVR), and surge protection

Emergency Power Off (EPO)

Provides for remote UPS shut-off in the event of a fire or other emergency (2,200 VA and above)

Getting started is easy..



Install your UPS

Install a next-generation Smart-UPS at your business site. Connect the UPS to your network using the built-in SmartConnect Ethernet port.



Scan the QR code

Scan the QR Code printed onto your Smart-UPS to automatically begin registration via the web portal.



Register your UPS

Create a Schneider Electric account for your business. Your Smart-UPS will be automatically linked to your account during UPS registration.





Smart-UPS SMT X413

with audible alarm disabled

Intelligent and efficient network power protection from entry level to scalable runtime. Ideal for servers, point-of-sale, routers, switches, hubs, and other network devices.

APC

Disabled Audible Alarm

Avoid the need to mute any audible alarms during events

Connectivity Options

Out-of-box connectivity to Smart-UPS Web Portal or EcoStruxure IT via the SmartConnect Ethernet Port for remote UPS monitoring

SmartSlot™ Interface

Accepts a wide array of accessory cards for advanced management and environmental monitoring

Switched Outlet Group

Controlled separately from the UPS for discrete reboot of hung devices, sequenced ON/OFF, and non-critical load shedding

Configurable, Multi-lingual LCD Display

Provides UPS status and key measures at a glance. Clear and accurate, menu-driven display for easy setup and customization with or without software installation

Extended-range Automatic Voltage Regulation


Provides enhanced brownout protection, boosting incoming voltage up to 30% without using battery power

PowerChute Software

Further remote management capabilities with included PowerChute software

Emergency Power Off (EPO)

Provides for remote UPS shut-off in the event of a fire or other emergency (2,200 VA and above)

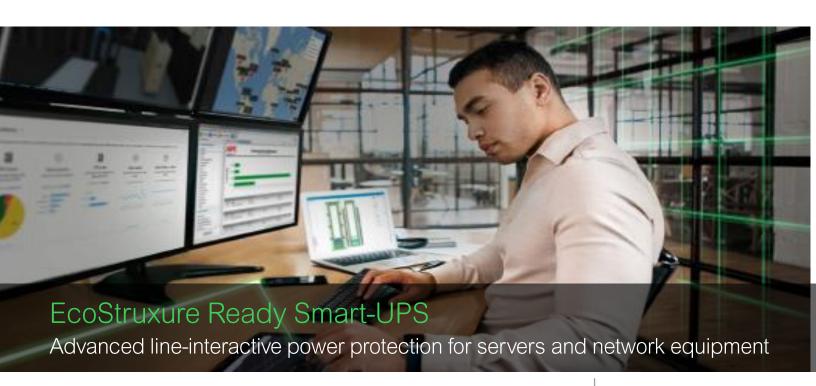



Smart-UPS SMT X413 Display

Intuitive, easy-to-use LCD interface



LCD Display Screen

Clear, consistent, and detailed information in your choice of basic or advanced menus

Power Status

Operating mode, efficiency, load, input / output frequency, battery capacity, runtime and more

Configuration

Easy to configure language, power quality, alarms, delay and threshold settings

Test and Diagnostics

Initiate battery and runtime calibration tests

Control

UPS and outlet group settings

Logs

See explanation of last 10 transfers and faults

Quick Status Indicators

Online, on battery, fault, and replace battery LEDs for quick status identification

Escape, Return and Navigation Buttons

Intuitive navigation to confirm, exit or adjust settings

Load Energy Meter

Track energy usage in kilo watt hours






EcoStruxure Ready Smart-UPS Connectivity Options

Smart-UPS Web Portal

Designed for business owners who prefer to selfmanage and need essential monitoring capabilities



EcoStruxure Ready

Connect to either to Smart-UPS Web Portal or to EcoStruxure IT via the SmartConnect Ethernet Port

Features

Customizable Event Notifications

Sent to you and your team in real-time

UPS Firmware Updates

Enabling proactive decision making

Event Logs

Consolidated dashboard view of your devices

Self-Test

Designed for automation and self-serviceability

Free remote UPS monitoring is provided via the Web Portal for devices under product or extended warranty. SMC devices are aligned with other lead-acid battery devices to also have 3 years monitoring.



Designed for you

The Smart-UPS Portal is designed for business owners who prefer to self-manage and need essential monitoring capabilities.

EcoStuxure IT software and services empower IT professionals, whether they want to monitor and manage themselves or leverage a preferred partner









EcoStruxure Ready Smart-UPS Connectivity Options



UPS Network Management Cards For remote management and control

Connect to your network and enjoy direct control

Secure remote monitoring and control of an individual APC UPS via a web browser, command line interface or SNMP. The configurable notification features keep you informed of events as they occur.

Ease-of-Mind

- Processor supporting up to 1Gbps
- Enhanced security including authentication credentials and modified password policy

Advanced User-Experience

- Extended memory to accommodate data storage demands
- · Micro-USB based console included
- Pre-loaded language support

Management Scalability

 Connect to EcoStruxure IT via the Network Management Card for full configuration, management and service options

PowerChute Software

Provides graceful network-based shutdown of physical and virtual IT architectures.

There are two versions of PowerChute for Smart-UPS Models:

PowerChute Business Edition



Smart-UPS 3kVA and under and without a Network Management Card

Remotely shutdown connected equipment during an extended power outage

Enables Proactive Uptime

Data Protection

PowerChute Network Shutdown



Smart-UPS with a Network Management Card

Unattended shutdown and restart of physical servers and virtual machines

BEST IN CLASS certified integration with Hyperconverged Infrastructure leaders:

Cisco HyperFlex, HPE SimpliVity, Nutanix, Vmware, Dell EMC VxRail





Connected Smart-UPS Services and Accessories

Schneider Electric Critical Power & Cooling Services (CPCS) provides the highest quality services and solutions by trained and trusted professionals. Our world-class services offer a smart way to build, operate, and maintain your critical applications, ensuring the right people, in the right place, at the right time.

Management cards

- AP9640: UPS Network Management Card
- AP9641: UPS Network Management card with Environmental Monitoring
 - AP9643: UPS Network Management Card with Environmental Monitoring and Modbus



Service bypass panels

- SBP1500RM: APC service bypass PDU, 120V;
 15 amp with (8) NEMA 5-15R
- SBP300RM: APC service bypass PDU, 120V; 30 amp with (4) NEMA 5-20R





Smart-UPS SMT X413





SKU technical specifications

	SMT1500CX413
Topology	Line Interactive
Output	
Output power capacity	1000 Watts / 1500VA
Nominal output voltage	120 V
Output voltage distortion	Less than 5% at full load
Output frequency (sync to mains)	50/60 Hz +/- 3 Hz (auto sensing)
Waveform type	Sine Wave
Output connections	(8) NEMA 5-15R
Switched outlet group	Yes/One
Efficiency at full load	96%
Input	
Nominal input voltage	120 Vac
Input frequency	47 ~ 63 Hz +/- 3 Hz (auto sensing)
Input connections	NEMA 5-15P
Input voltage range	75V – 131V
Batteries and runtime	
Battery type	Maintenance-free, sealed lead-acid battery, leak proof
Runtime (Full load/ Half load)	7 / 23 min
Communications and management	
Interface port(s)	Serial (RJ45), SmartSlot, USB, APC SmartConnect (RJ45)
SmartSlot™ interface availability	Yes
Control panel	Multi-function LCD status and control console
Physical	
Net HxWxD (inches)	8.46 x 6.72 x 17.3
Net weight (lbs.)	53
Color	Black
Environmental	
Operating environment	32 – 104 °F (0 – 40 °C)
Operating relative humidity	0 – 95%
Operating elevation	0-10000 feet (0-3000 meters)
Storage temperature	-4 – 131 °F (-20 – 55 °C) short term storage
Storage relative humidity	0-95%, non-condensing
Storage elevation	0-50000 feet (0-15000 meters)
Audible noise at 1 meter	41 dBA
Conformance	
Regulatory approvals	UL 1778, CSA
Standard warranty	3-year electronics and 2-year battery





Learn more today!

apc.com

Schneider Electric

One Boston Place Floor 27 Boston, MA 02108 United States