

SHORT FRAME-DOUBLE POD-DUCTED CEILING WITHOUT RACKS AND DISTRIBUTION PANEL

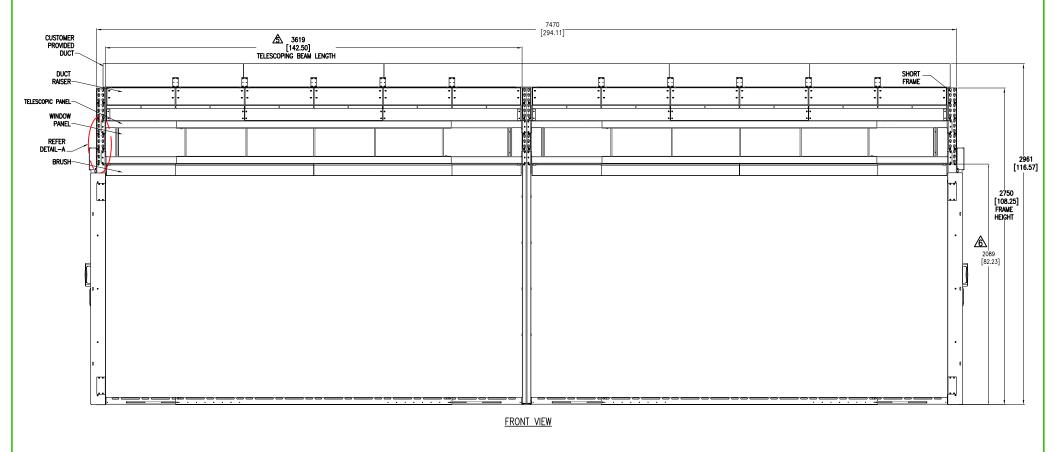

NOIES

- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
- 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
- 3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- 4. WEIGHT REFER TO THE RESPECTIVE SUBMITTALS.
- △5. THIS DIMENSION MAY VARY AS PER RACK WIDTH AND NUMBER OF RACK. SHOWN TYPICAL ARRANGEMENT FOR TWELVE 600mm WIDE RACKS. TELESCOPING BEAM CAN ACCOMMODATE ANY COMBINATION OF RACKS FROM 8-12 FEET.
- Δ 6. Short frame can accommodate up to 48U, refer to table for details.
- 7. THIS DRAWING IS FOR TYPICAL CONFIGURATION.



RACK HEIGHT		
U	mm [inch]	
42U	1991 [78.39]	
45U	2124 [83.64]	
48U	2258 [88.90]	

1-JUN-17


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF
SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR
USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE
OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER
ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE
INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Sch	neider Electric
_	- Election

ITLE: HYPERPOD ORT FRAME, DOUBLE POD, DUCT RAISER	DWG NO: SFDPDRWORD			REV.
ITHOUT RACK AND DISTRIBUTION PANEL	DRAWN BY:	BALA	1-JUN-17	FIRST
FRONT VIEW	ENGINEER:	A COTTER	1-JUN-17	ANGLE

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 3 APPROVED BYR SYMONS

SHORT FRAME-DOUBLE POD-DUCTED CEILING WITHOUT RACKS AND DISTRIBUTION PANEL

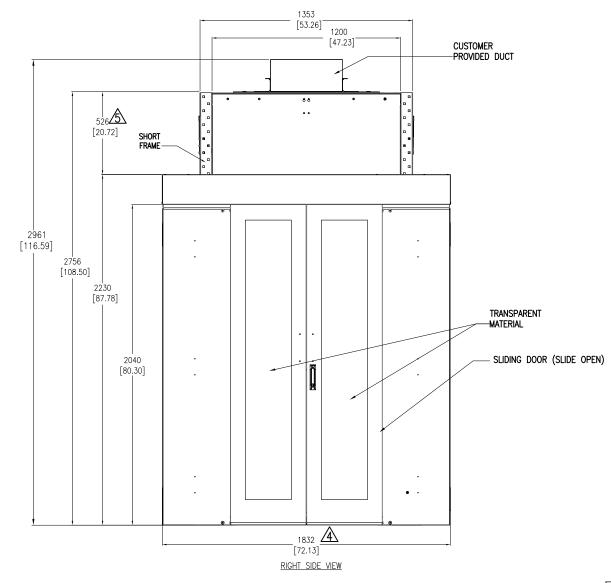

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.

2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.

3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].

A 4. OVER ALL CONTAINMENT POD WIDTH DIMENSION MAY VARY AS PER THE COMPONENT SELECTED, BASED ON THE DEPTH OF THE RACK. REFER TO TABLE FOR DETAILS.

 Δ 5. RACK AND ROOF HEIGHT VARY AS PER THE COMPONENT SELECTED.

6. THIS DRAWING IS FOR TYPICAL CONFIGURATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: HYPERPOD			DPDR	WORD	REV.		
SHORT FRAME, DOUBLE POD, DUCT RAISER WITHOUT RACK AND DISTRIBUTION PANEL RIGHT SIDE VIEW			DRAWN BY:	BALA	1-JUN-17	FIRST	
			ENGINEER:	A COTTER	1-JUN-17	ANGLE	
DRU IECT: STIBMITTAL	DRAWINGS	SHEET	2 NF 3	APPROVED BYE	SYMONS	1 – JI IN – 17	DRO I

A

RACK DEPTH

mm [inch]


825 [32.480]

1070 [42.125]

1200 [47.244]

PRO

SHORT FRAME-DOUBLE POD-DUCTED CEILING WITHOUT RACKS AND DISTRIBUTION PANEL

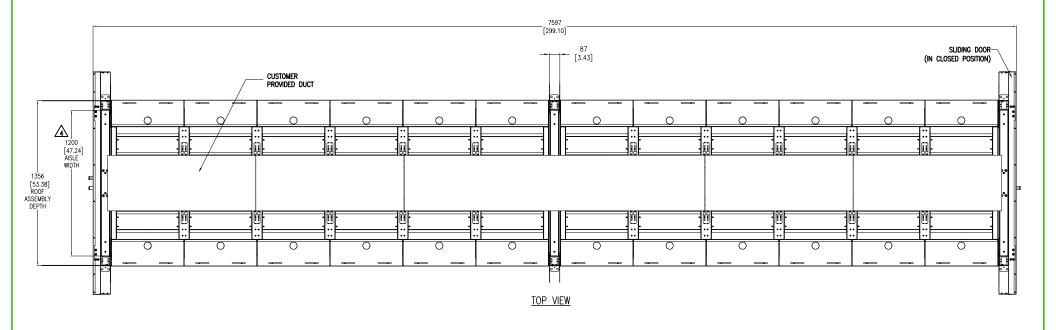



AIS	SLE WIDTH
Feet	mm [inch]
3	914.4 [36.0]
4	1219.2 [48.0]
5	1524.0 [60.0]
6	1828.8 [72.0]

NOTES

- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
- 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
- 3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- 🛆 4. ACROSS AISLE DIMENSION MAY VARY AS PER THE REQUIREMENT. TABLE SHOWS STANDARD CONFIGURATION.
 - 5. THIS DRAWING IS FOR TYPICAL CONFIGURATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



ITLE: HYPERPOD IORT FRAME, DOUBLE POD, DUCT RAISER	DWG NO: SFDPDRWORD			REV.	
WITHOUT RAĆK AND DISTRIB	DRAWN BY:	BALA	1-JUN-17	FIRS	
TOP VIEW	ENGINEER:	A COTTER	1-JUN-17	ANGL	
PROJECT: SUBMITTAL DRAWINGS	SHEET 3 OF 3	APPROVED BYR	SYMONS	1-JUN-17	PRO