


**SHORT FRAME-SINGLE POD-DUCTED CEILING WITHOUT RACKS AND DISTRIBUTION PANEL**

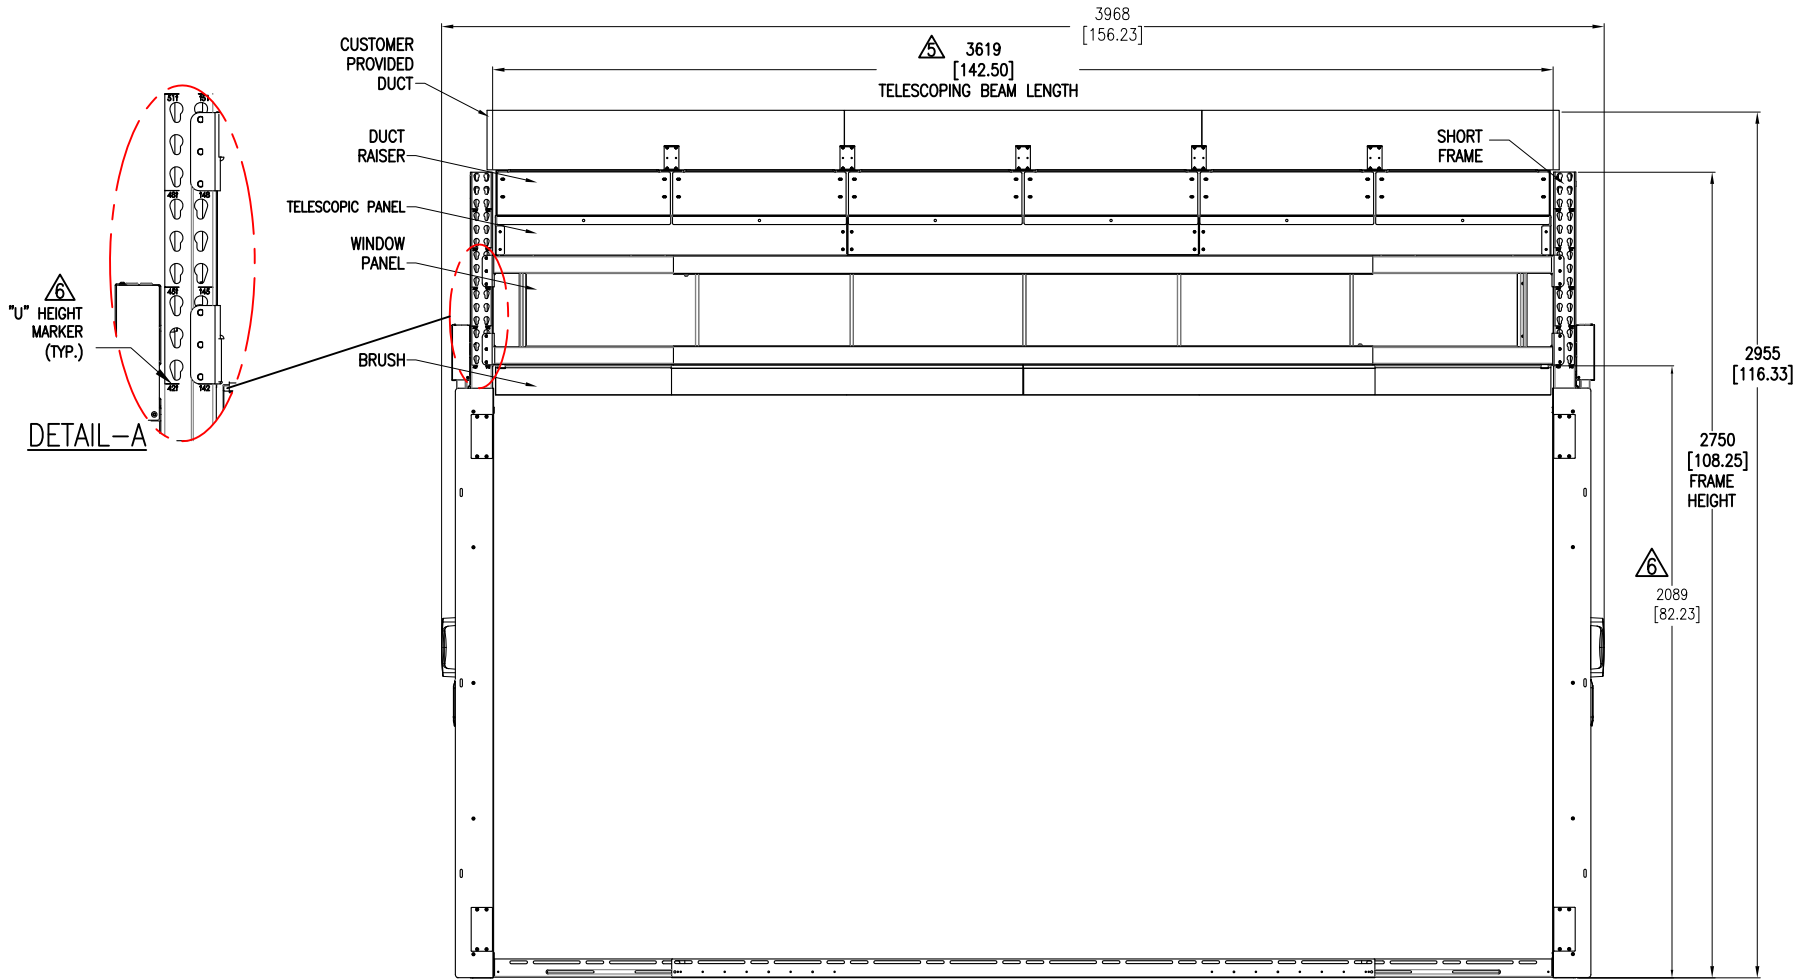

FRONT VIEW

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
4. WEIGHT - REFER TO THE RESPECTIVE SUBMITTALS.
- Δ5. THIS DIMENSION MAY VARY AS PER RACK WIDTH AND NUMBER OF RACK. SHOWN TYPICAL ARRANGEMENT FOR TWELVE 600mm WIDE RACKS. TELESCOPING BEAM CAN ACCOMMODATE ANY COMBINATION OF RACKS FROM 8-12 FEET.
- Δ6. SHORT FRAME CAN ACCOMMODATE UP TO 48U, REFER TO TABLE FOR DETAILS.
7. THIS DRAWING IS FOR TYPICAL CONFIGURATION.

RACK HEIGHT	
U	mm [inch]
42U	1991 [78.39]
45U	2124 [83.64]
48U	2258 [88.90]

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: HYPERPOD  
SHORT FRAME, SINGLE POD, DUCT RAISER  
WITHOUT RACK AND DISTRIBUTION PANEL  
FRONT VIEW

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 3


DWG NO: SFSPDRWORD REV. 0

DRAWN BY: BALA 29-MAY-17 FIRST ANGLE PROJ

ENGINEER: A COTTER 30-MAY-17

APPROVED BY: SYMONS 30-MAY-17

# SHORT FRAME-SINGLE POD-DUCTED CEILING WITHOUT RACKS AND DISTRIBUTION PANEL

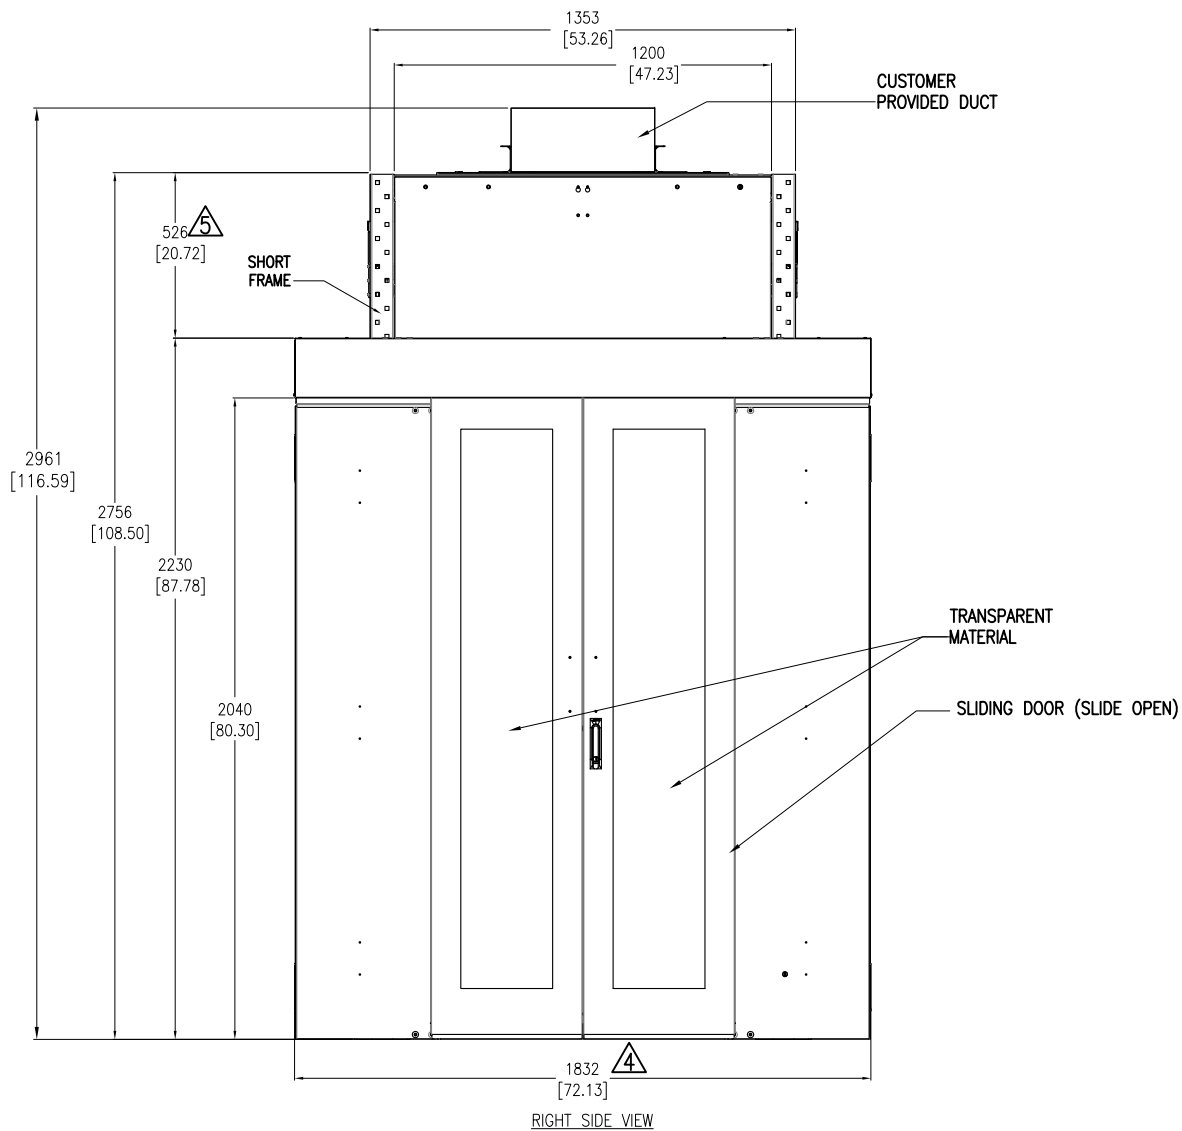

## NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- $\triangle 4$ . OVER ALL CONTAINMENT POD WIDTH DIMENSION MAY VARY AS PER THE COMPONENT SELECTED, BASED ON THE DEPTH OF THE RACK. REFER TO TABLE FOR DETAILS.
- $\triangle 5$ . RACK AND ROOF HEIGHT VARY AS PER THE COMPONENT SELECTED.
6. THIS DRAWING IS FOR TYPICAL CONFIGURATION.

$\triangle 4$	
RACK DEPTH	REV.
mm [inch]	0
825 [32.480]	FIRST
1070 [42.125]	ANGLE
1200 [47.244]	PROJ

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

**Schneider Electric**

TITLE: HYPERPOD  
SHORT FRAME, SINGLE POD, DUCT RAISER  
WITHOUT RACK AND DISTRIBUTION PANEL  
RIGHT SIDE VIEW

PROJECT: SUBMITTAL DRAWINGS SHEET 2 OF 3

DWG NO: SFSPDRWORD


DRAWN BY: BALA 29-MAY-17

ENGINEER: A COTTER 30-MAY-17

APPROVED BY: SYMONS 30-MAY-17

REV. 0  
FIRST  
ANGLE  
PROJ

**SHORT FRAME-SINGLE POD-DUCTED CEILING WITHOUT RACKS AND DISTRIBUTION PANEL**

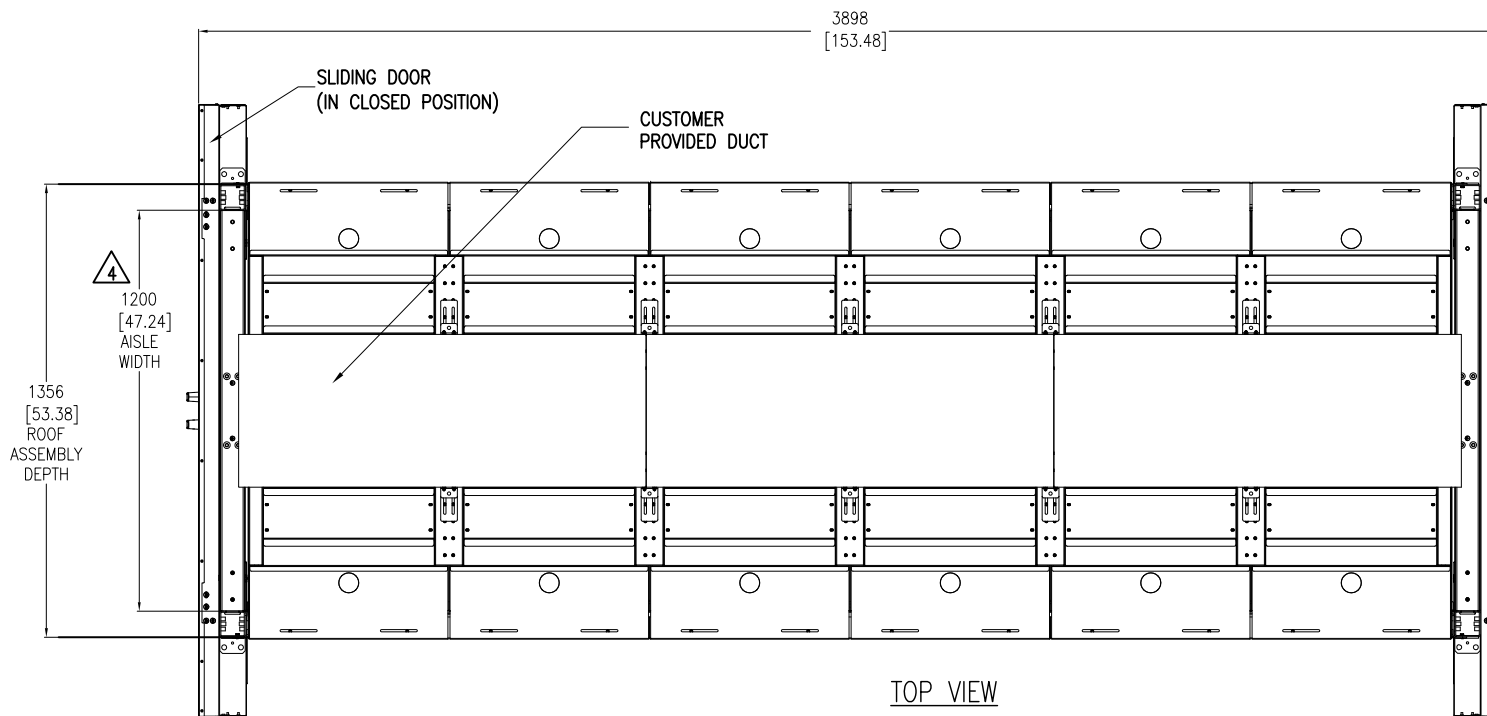

AISLE WIDTH	
Feet	mm [inch]
3	914.4 [36.0]
4	1219.2 [48.0]
5	1524.0 [60.0]
6	1828.8 [72.0]

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
3. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- △ 4. ACROSS AISLE DIMENSION MAY VARY AS PER THE REQUIREMENT. TABLE SHOWS STANDARD CONFIGURATION.
5. THIS DRAWING IS FOR TYPICAL CONFIGURATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: HYPERPOD  
SHORT FRAME, SINGLE POD, DUCT RAISER  
WITHOUT RACK AND DISTRIBUTION PANEL  
TOP VIEW

PROJECT: SUBMITTAL DRAWINGS SHEET 3 OF 3

DWG NO:	SFSPDRWORD	REV.	0
DRAWN BY:	BALA	29-MAY-17	FIRST ANGLE PROJ
ENGINEER:	A COTTER	30-MAY-17	
APPROVED BY:	SYMONS	30-MAY-17	