

VIEW F
 Output:
 200-240 VAC
 50/60 Hz
 MAX 24 AMPS
 16 MAX AMPS PER BANK

- NOTES:**
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
 2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION
 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
 4. UNIVERSAL MOUNTING BRACKET IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR NON SCHNEIDER ELECTRIC RACKS.
 5. BRACKET KITS TO MOUNT TO SPECIFIC COMPETITORS RACKS ARE AVAILABLE AS OPTIONS.
 6. NET WEIGHT IS 5.57 KG [12.25 LBS].

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.




TITLE: RACK PDU, BASIC, ZERO U
 INPUT: 200/208VAC, 30A MAX, NEMA L6-30P
 OUTPUT: (20) IEC320 C13, (4) IEC320 C19
 DOUBLE POLE CIRCUIT BREAKERS
 GENERAL MECHANICAL LAYOUT

PROJECT: STD SUBMITTAL DRAWINGS | **SHEET** 1 OF 2

DWG NO: AP7541
REV: 2

DRAWN BY: M CRAVEN 24-AUG-09
ENGINEER: T HORSTMANN/Y JIANG 24-AUG-09
APPROVED BY: B SHERMAN/F DISSA/S WUOH 25-AUG-09

THIRD ANGLE PROJ

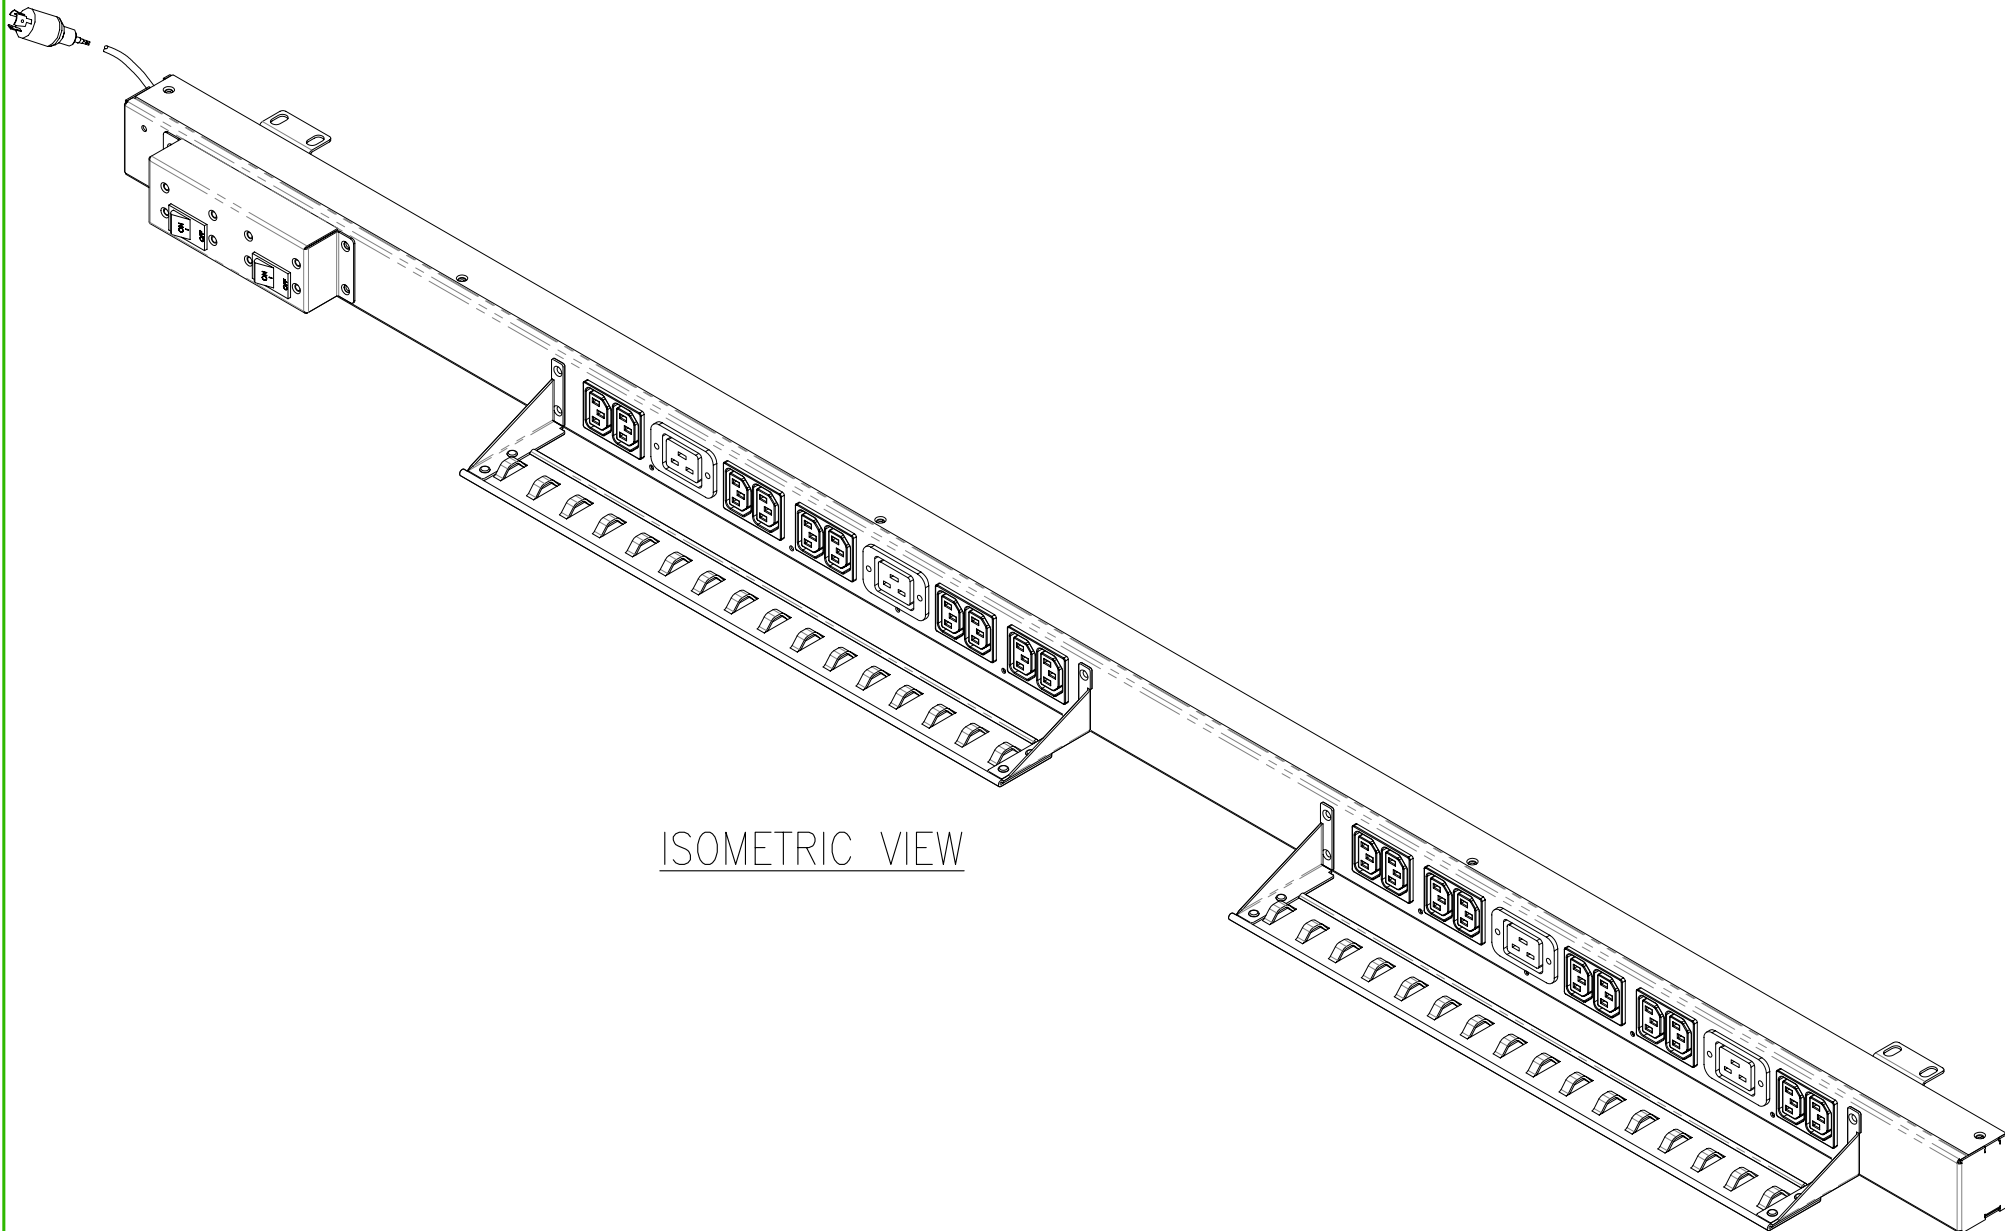

ISOMETRIC VIEW

NOTES:
1. SEE SHEET 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE:
RACK PDU, BASIC, ZERO U
INPUT: 200/208VAC, 30A MAX, NEMA L6-30P
OUTPUT: (20) IEC320 C13, (4) IEC320 C19
DOUBLE POLE CIRCUIT BREAKERS
ISOMETRIC VIEW

PROJECT: STD SUBMITTAL DRAWINGS SHEET 2 OF 2

DWG NO:	AP7541	REV.	2
DRAWN BY:	M CRAVEN	24-AUG-09	THIRD
ENGINEER:	T HORSTMANN/Y JIANG	24-AUG-09	ANGLE
APPROVED BY:	B SHERIDAN/F DIOSA/S WAGH	25-AUG-09	PROJ