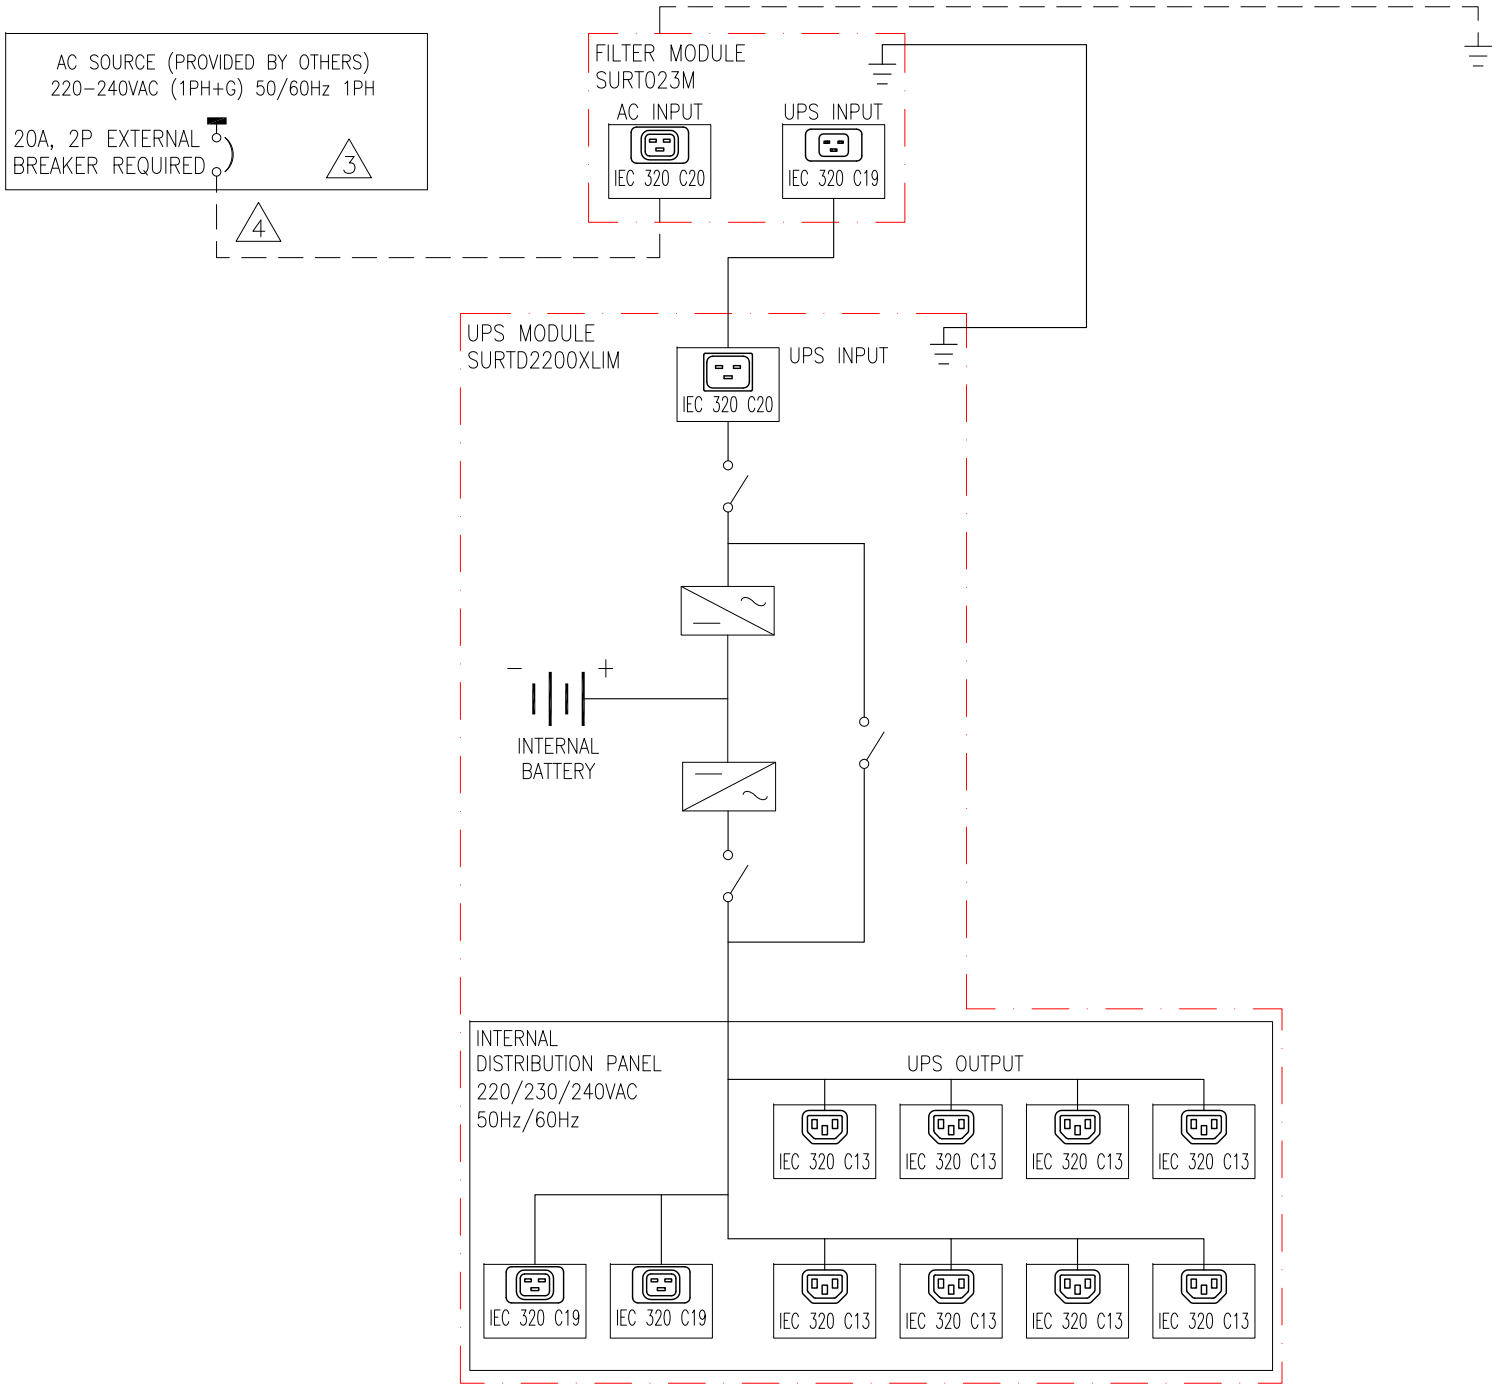

NOTES:

1. INSTALLATION MUST COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.
2. PLEASE REFER TO APC PRODUCT MANUAL FOR DETAILS.
3. △ AC SOURCE MUST BE 220–240VAC (1PH+G) 50/60Hz.
4. △ DASHED LINES BETWEEN UNITS (– – – –) REPRESENT CABLING PROVIDED BY OTHERS.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider Electric

TITLE:	SMART–UPS RT (SURT) 2200VA MARINE RACK–MOUNT INPUT: 230V; IEC 320 C20 OUTPUT: (8) IEC 320 C13; (2) IEC 320 C19 SINGLE–LINE DIAGRAM	DWG NO: SURTD2200XLIM–SD	REV. 0
PROJECT: STD SUBMITTAL DRAWINGS	SHEET 1 OF 1	DRAWN BY: S CUNHA 22–JUN–11	PROJ ANGLE
		ENGINEER: B McKENNA 22–JUN–11	
		APPROVED BY: B McKENNA 22–JUN–11	N/A