

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.
2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
 SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
 INPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), HARDWIRE  
 OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
 UPS ISOMETRIC VIEWS

PROJECT: STD SUBMITTAL DRAWING SHEET 1 of 11

**DWG NO:** SRT5KRMXLW-HW+SRT192RMBP


**DRAWN BY:** S CUNHA 08-OCT-14

**ENGINEER:** C KUMARSWAMY 08-OCT-14


**APPROVED BY:** M BEG 08-OCT-14

**REV** 0


THIRD ANGLE PROJ

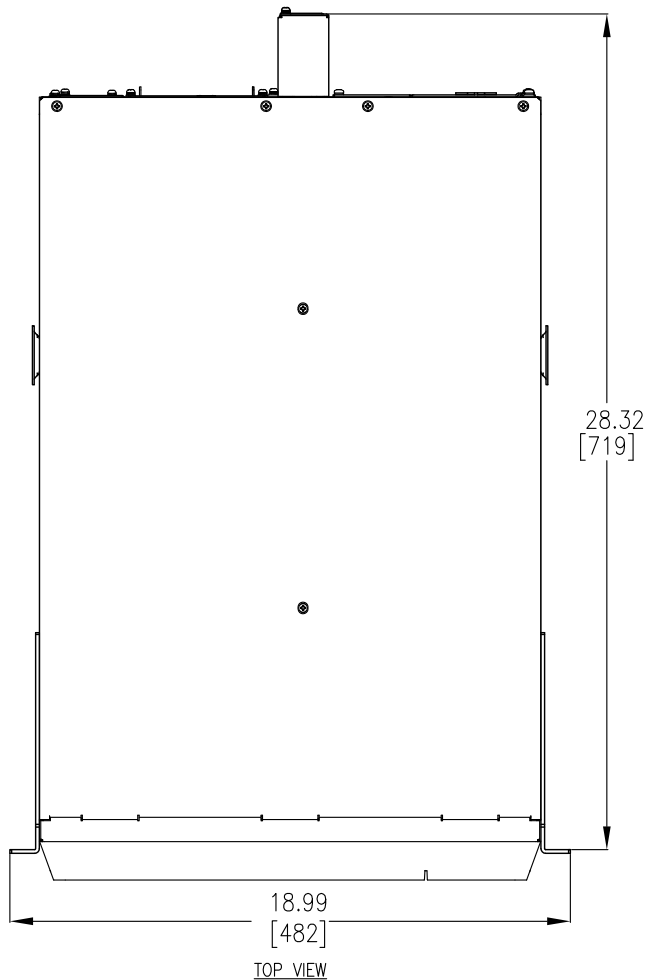

TOP VIEW

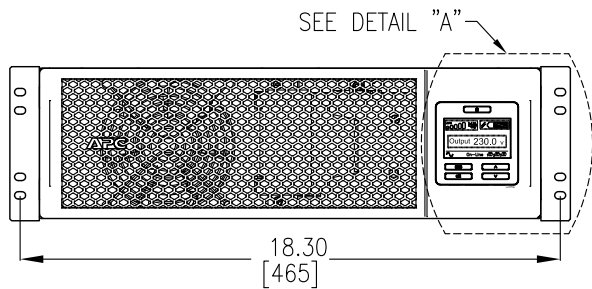


FRONT VIEW

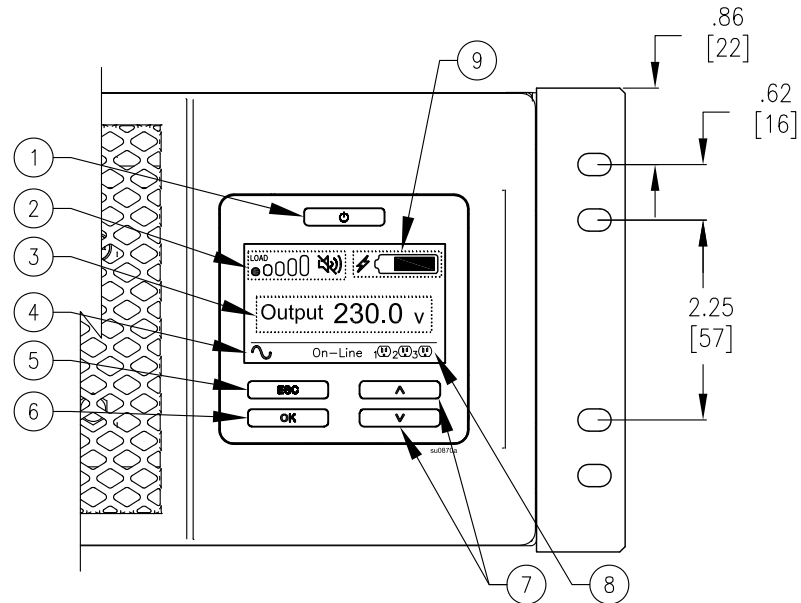

DETAIL "A" - ENLARGED VIEW

**DISPLAY INTERFACE:**

1. POWER "ON/OFF" BUTTON.
2. LOAD ICON, DISABLE/MUTE AUDIBLE ALARM ICON.
3. UPS STATUS INFORMATION.
4. OPERATION MODE ICONS.
5. "ESCAPE" BUTTON.
6. "OK" BUTTON.
7. "UP/DOWN" BUTTONS.
8. CONTROLLABLE OUTLET GROUP STATUS ICONS.
9. BATTERY STATUS ICONS.

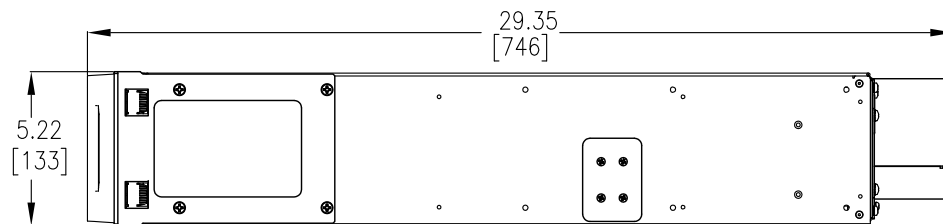

SIDE VIEW

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. WEIGHT OF UNIT IS 128.00 LBS [58.18 KG].
5. CABLE ENTRY FROM REAR SIDE OF UNIT.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: Smart-UPS On-Line (SRT)  
SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
INPUT: 208/220/230/240VAC, 3W (L1+L2/N+G), HARDWIRE  
OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
UPS MAIN MECHANICAL

PROJECT: STD SUBMITTAL DRAWING SHEET 2 of 11

DWG NO: SRT5KRMXLW-HW+SRT192RMBP


DRAWN BY: S CUNHA 08-OCT-14

ENGINEER: C KUMARSWAMY 08-OCT-14

APPROVED BY: M BEG 08-OCT-14

REV 0

THIRD ANGLE PROJ

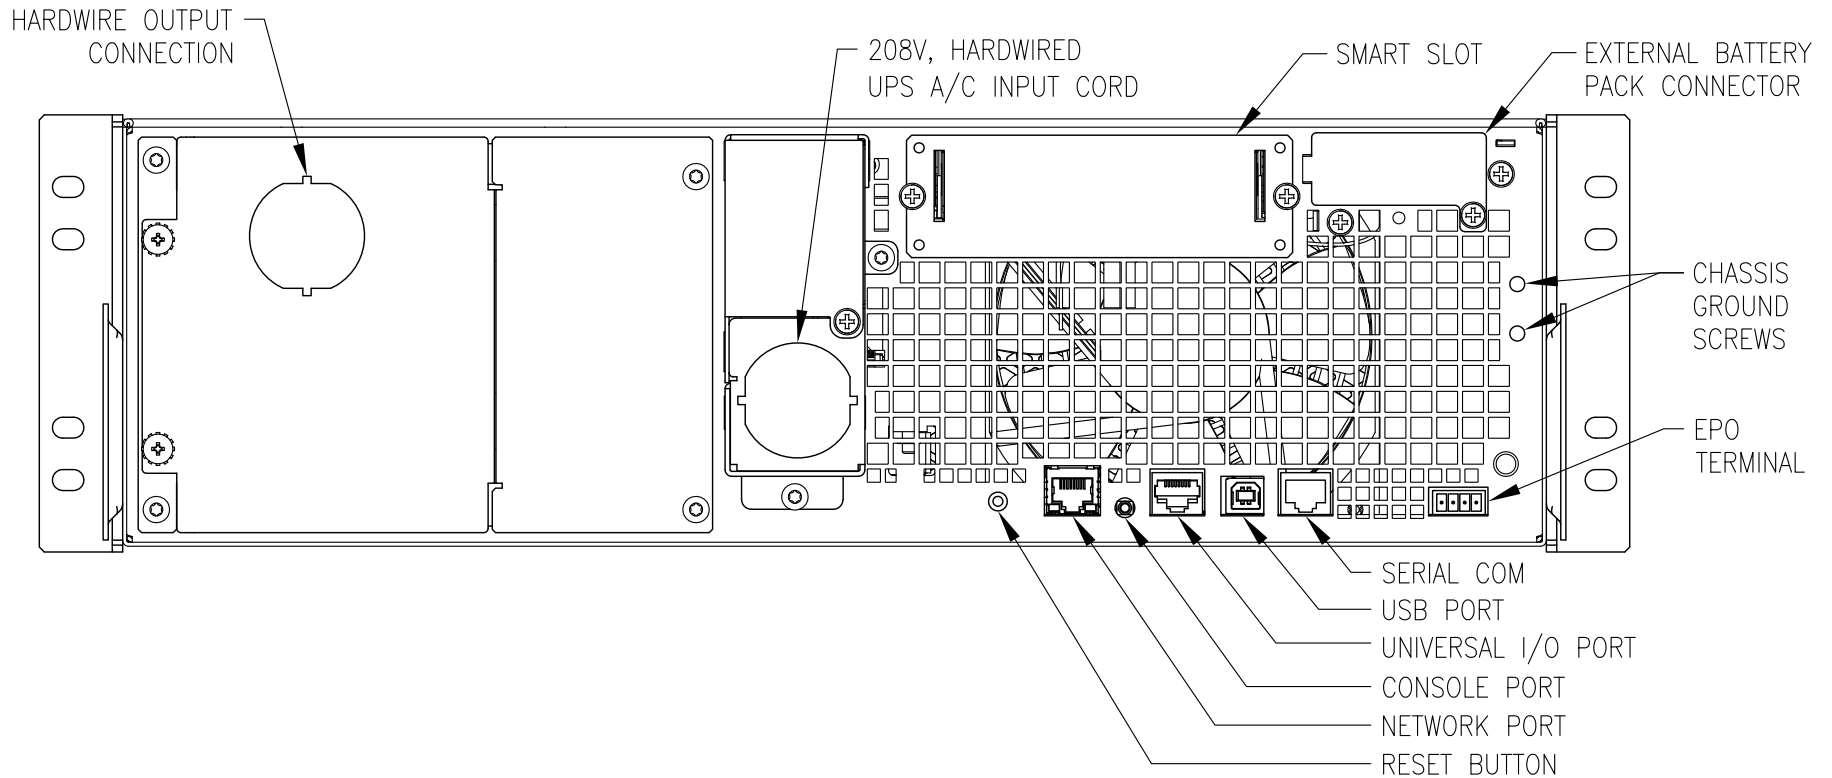

REAR VIEW

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: Smart-UPS On-Line (SRT)  
 SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
 INPUT: 208/220/230/240VAC, 3W (L1+L2/N+G), HARDWIRE  
 OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
 UPS REAR VIEW

PROJECT: STD SUBMITTAL DRAWING SHEET 3 of 11

DWG NO: SRT5KRMXLW-HW+SRT192RMBP


DRAWN BY: S CUNHA 08-OCT-14

ENGINEER: C KUMARSWAMY 08-OCT-14

APPROVED BY: M BEG 08-OCT-14

REV 0

THIRD ANGLE PROJ

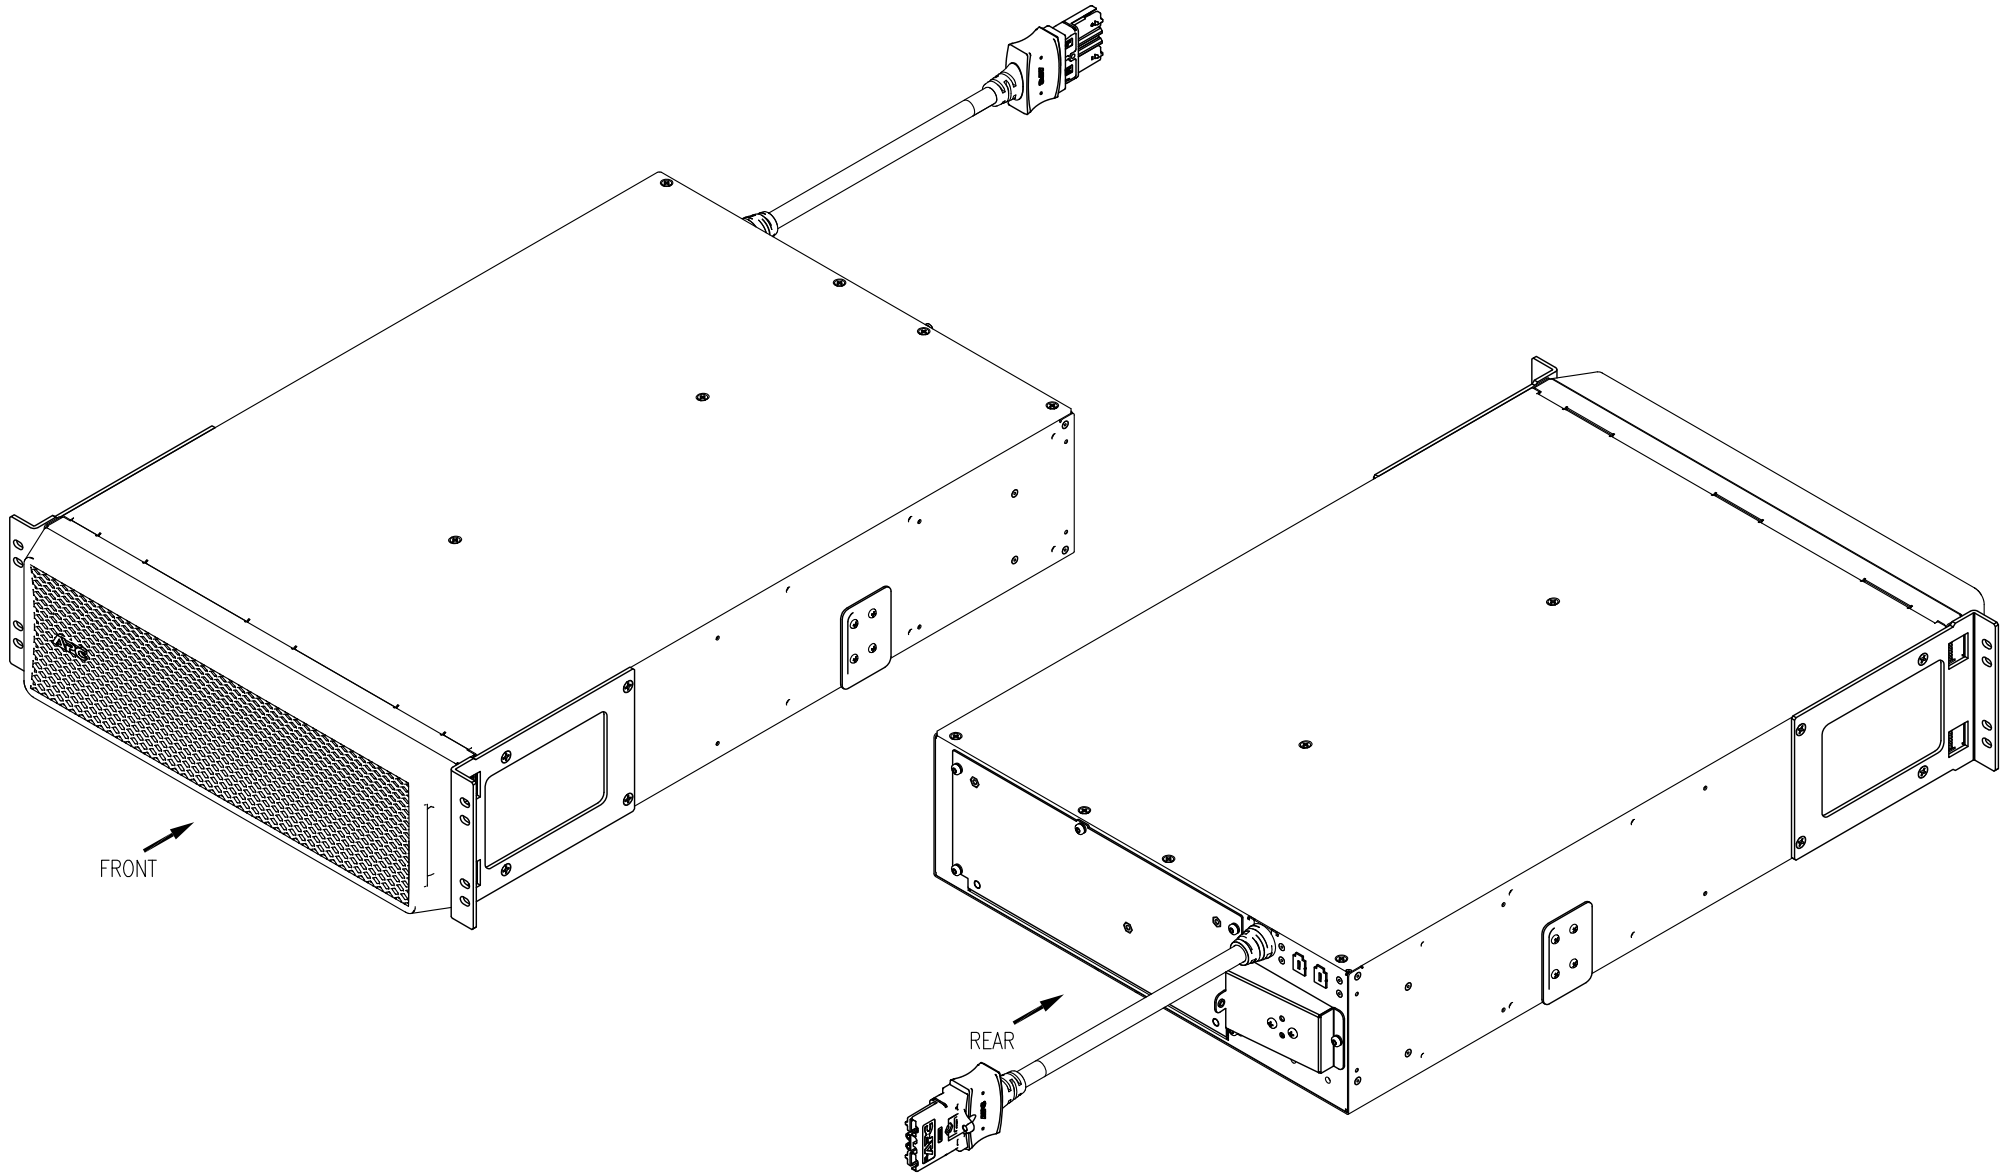

FRONT →

← REAR

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.
2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
 SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
 INPUT: 208/220/230/240VAC, 3W (L1+L2/N+G), HARDWIRE  
 OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
 XBP ISOMETRIC VIEWS

PROJECT: STD SUBMITTAL DRAWING SHEET 4 of 11

**DWG NO:** SRT5KRMXLW-HW+SRT192RMBP


**DRAWN BY:** S CUNHA 08-OCT-14

**ENGINEER:** C KUMARSWAMY 08-OCT-14


**APPROVED BY:** M BEG 08-OCT-14

**REV** 0


**THIRD ANGLE PROJ**

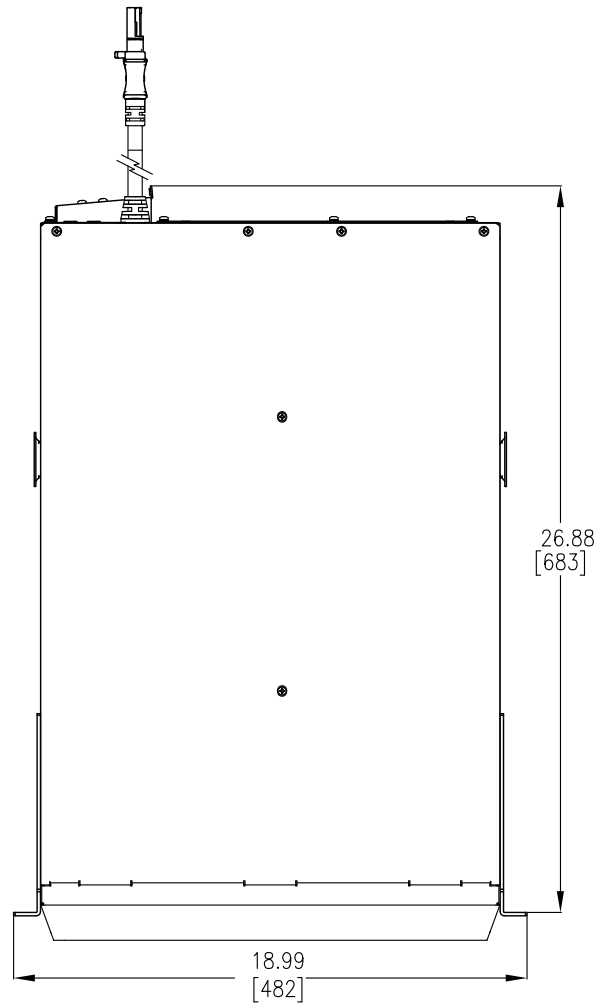

TOP VIEW

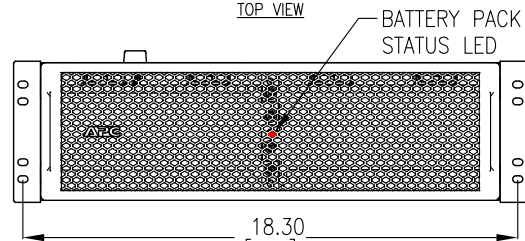

FRONT VIEW

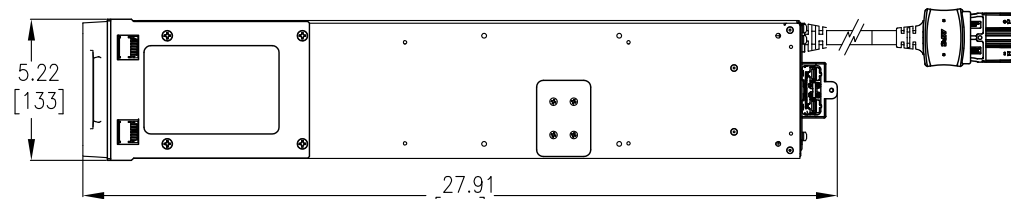

SIDE VIEW

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. WEIGHT OF UNIT IS 200.20 LBS [91.00 KG].
5. CABLE ENTRY FROM REAR SIDE OF UNIT.


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
 SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
 INPUT: 208/220/230/240VAC, 3W (L1+L2/N+G), HARDWIRE  
 OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
 XBP MAIN MECHANICAL

**PROJECT:** STD SUBMITTAL DRAWING **SHEET** 5 of 11

<b>DWG NO:</b> SRT5KRMXLW-HW+SRT192RMBP	<b>REV</b> 0
<b>DRAWN BY:</b> S CUNHA	08-OCT-14
<b>ENGINEER:</b> C KUMARSWAMY	08-OCT-14
<b>APPROVED BY:</b> M BEG	08-OCT-14
	THIRD ANGLE PROJ

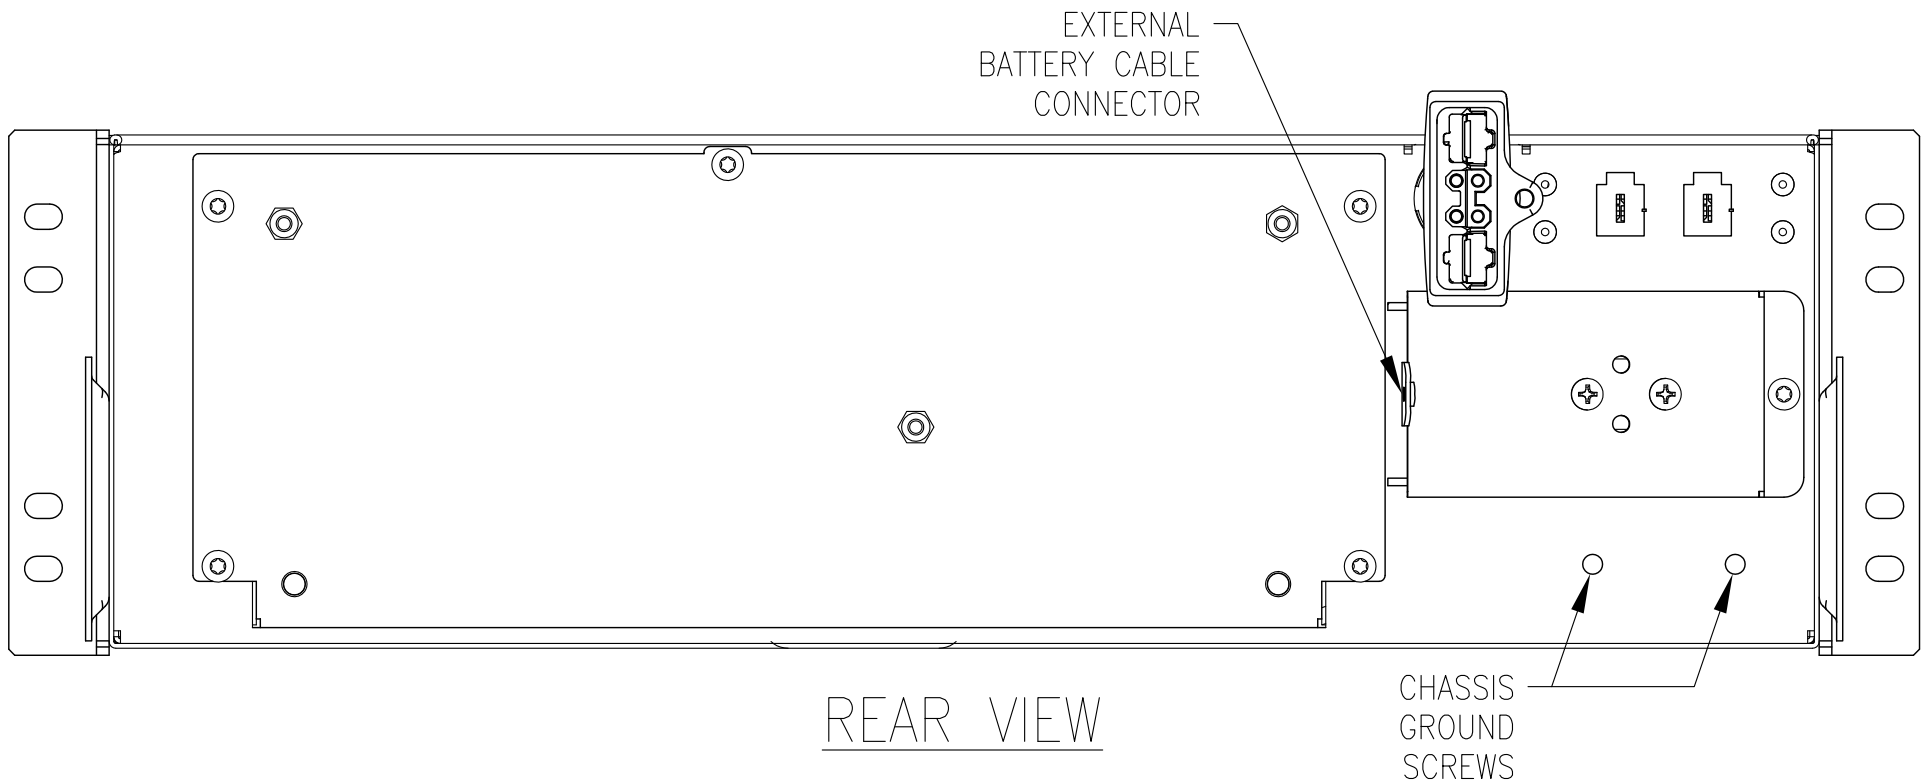

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
INPUT: 208/220/230/240VAC, 3W (L1+L2/N+G), HARDWIRE  
OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
XBP REAR VIEW

PROJECT: STD SUBMITTAL DRAWING SHEET 6 of 11

**DWG NO:** SRT5KRMXLW-HW+SRT192RMBP


**DRAWN BY:** S CUNHA 08-OCT-14

**ENGINEER:** C KUMARSWAMY 08-OCT-14

**APPROVED BY:** M BEG 08-OCT-14

**REV** 0

**THIRD ANGLE PROJ**

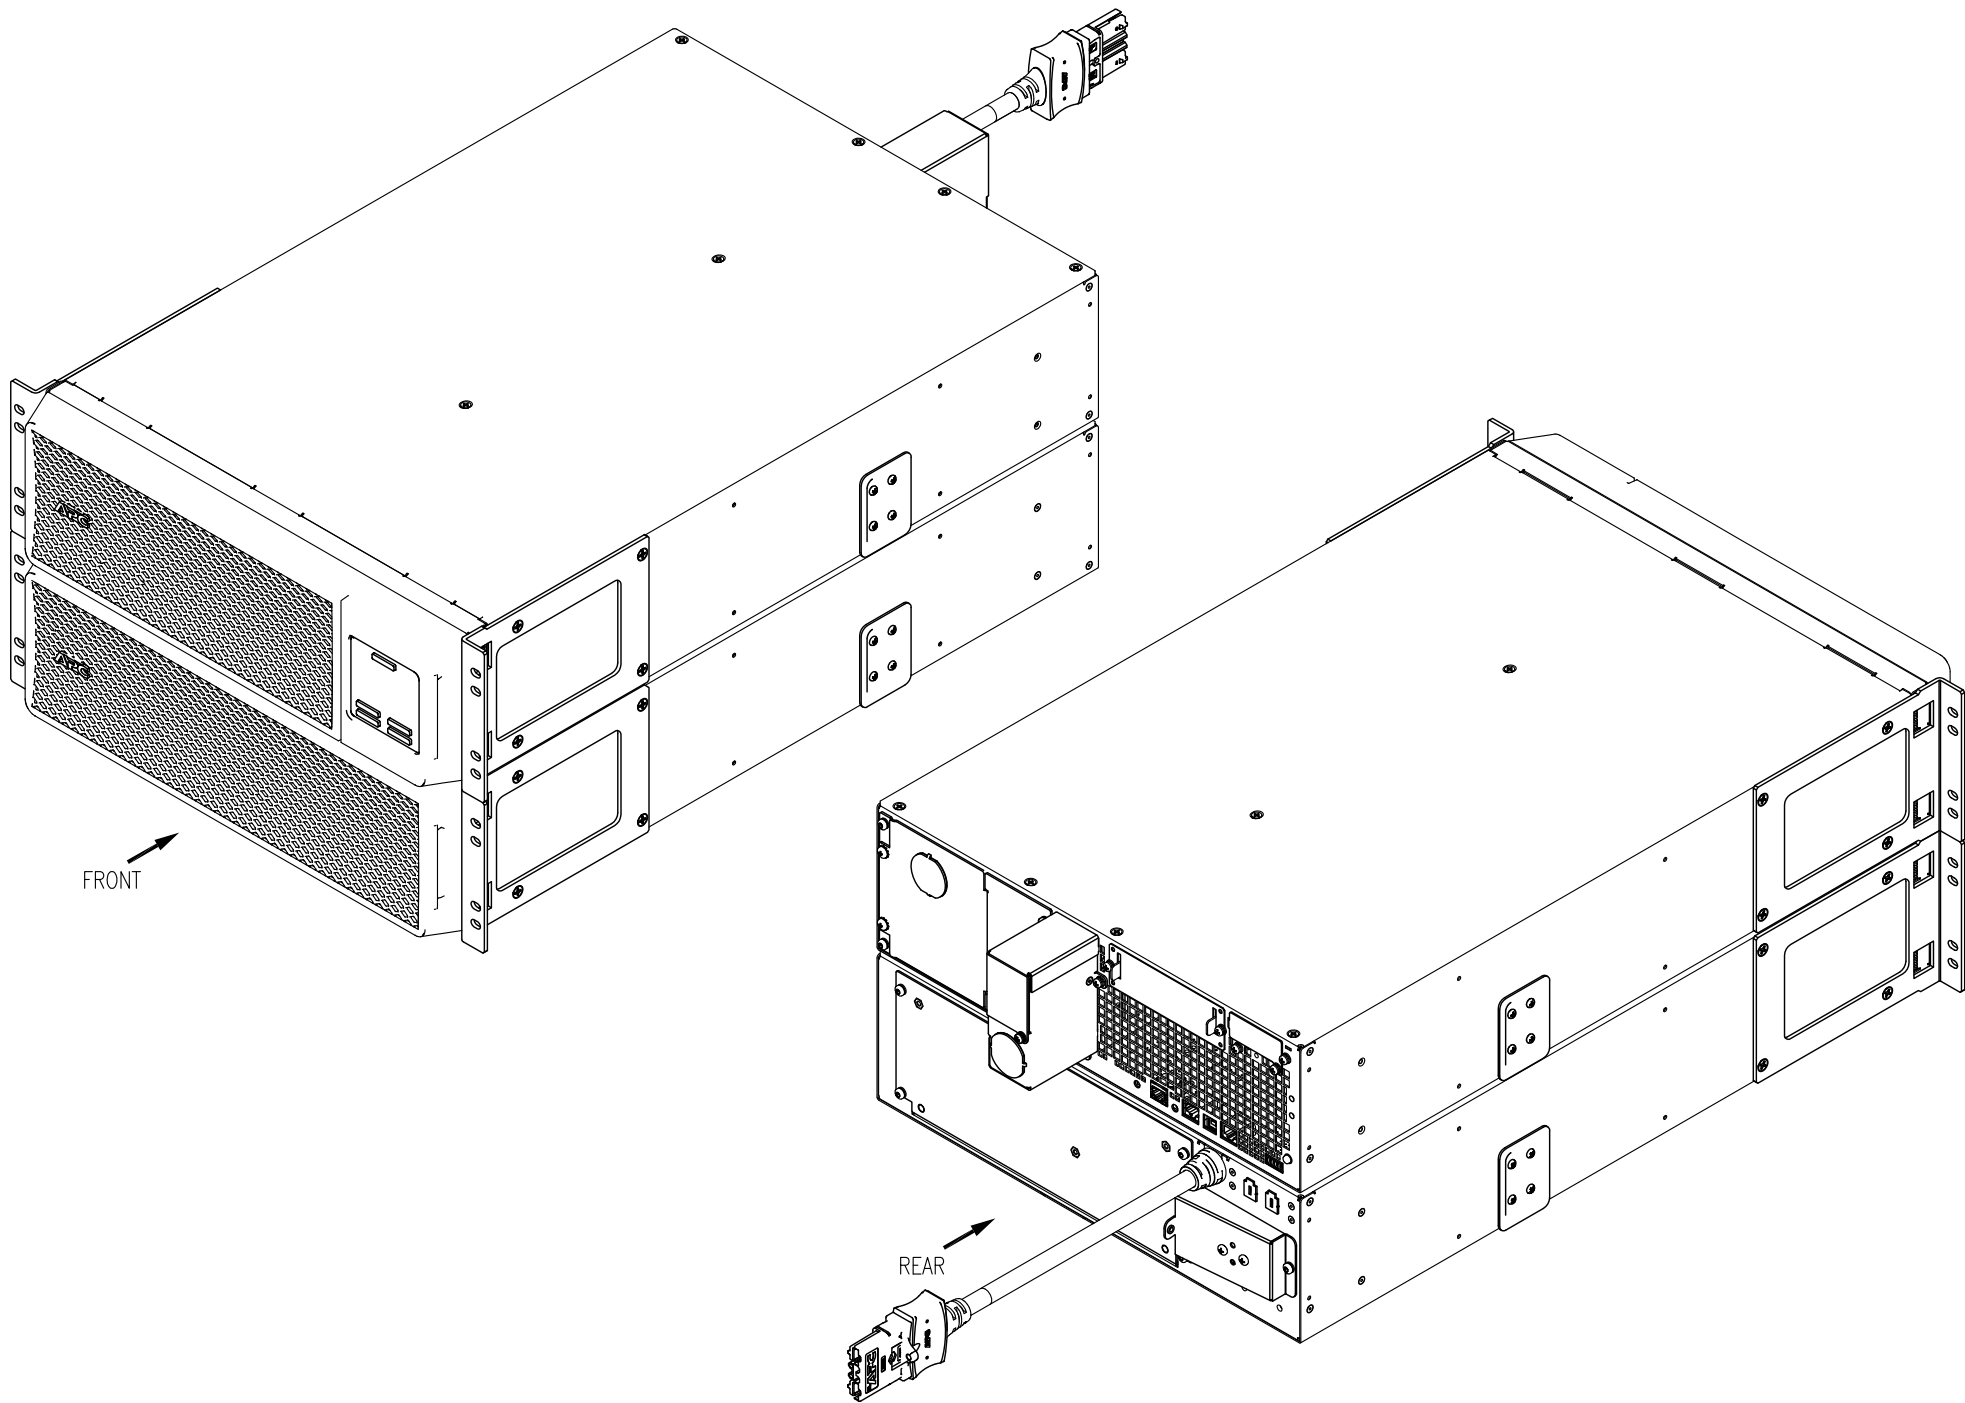

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.
2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
 SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
 INPUT: 208/220/230/240VAC, 3W (L1+L2/N+G), HARDWIRE  
 OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
 BAYED ISOMETRIC VIEWS

PROJECT: STD SUBMITTAL DRAWING SHEET 7 of 11

**DWG NO:** SRT5KRMXLW-HW+SRT192RMBP



**DRAWN BY:** S CUNHA 08-OCT-14

**ENGINEER:** C KUMARSWAMY 08-OCT-14



**APPROVED BY:** M BEG 08-OCT-14

**REV** 0

THIRD  
 ANGLE  
 PROJ

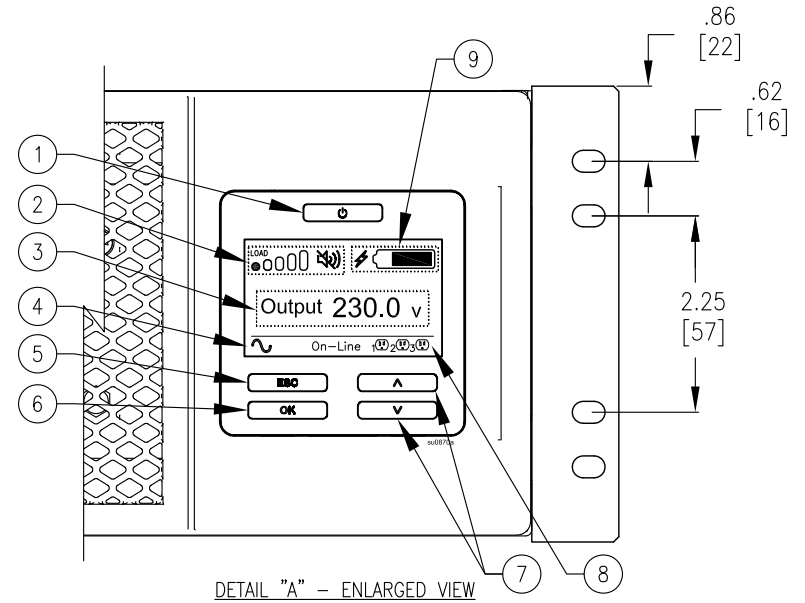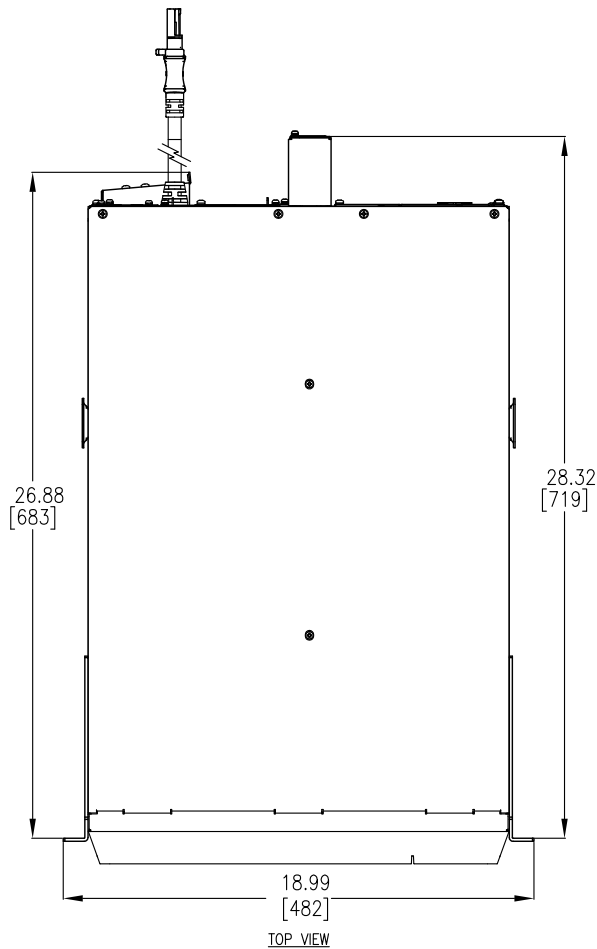

- DISPLAY INTERFACE:**
1. POWER "ON/OFF" BUTTON.
  2. LOAD ICON, DISABLE/MUTE AUDIBLE ALARM ICON.
  3. UPS STATUS INFORMATION.
  4. OPERATION MODE ICONS.
  5. "ESCAPE" BUTTON.
  6. "OK" BUTTON.
  7. "UP/DOWN" BUTTONS.
  8. CONTROLLABLE OUTLET GROUP STATUS ICONS.
  9. BATTERY STATUS ICONS.

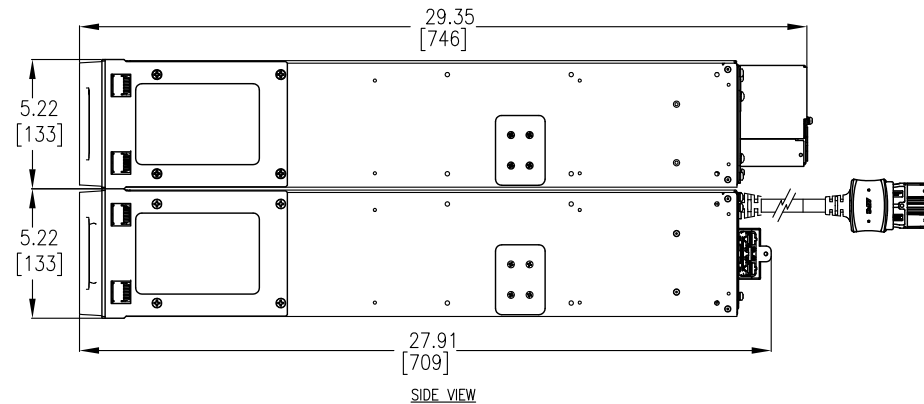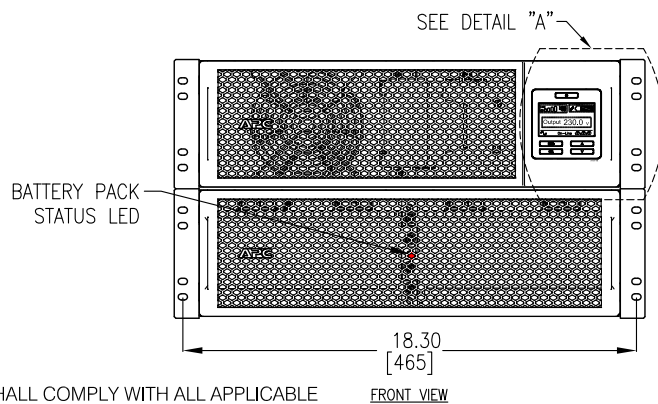

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. WEIGHT OF UNIT IS 328.20 LBS [149.18 KG].
5. CABLE ENTRY FROM REAR SIDE OF UNIT.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
INPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), HARDWIRE  
OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
BAYED MAIN MECHANICAL

**PROJECT:** STD SUBMITTAL DRAWING **SHEET** 8 of 11

**DWG NO:** SRT5KRMXLW-HW+SRT192RMBP

**DRAWN BY:** S CUNHA 08-OCT-14

**ENGINEER:** C KUMARSWAMY 08-OCT-14

**APPROVED BY:** M BEG 08-OCT-14


**REV** 0

**THIRD ANGLE PROJ**



SRT5KRMXLW-HW; (NUMBERING PER OPERATIONS MANUAL)

1. SMART SLOT
2. EXTERNAL BATTERY PACK CONNECTOR
3. CHASSIS GROUND SCREWS
4. HAREWIRE OUTPUT CONNECTION
5. EPO TERMINAL
6. SERIAL COM
7. USB PORT
8. UNIVERSAL I/O PORT
9. CONSOLE PORT
10. NETWORK PORT
11. RESET BUTTON
12. UPS INPUT POWER CABLE

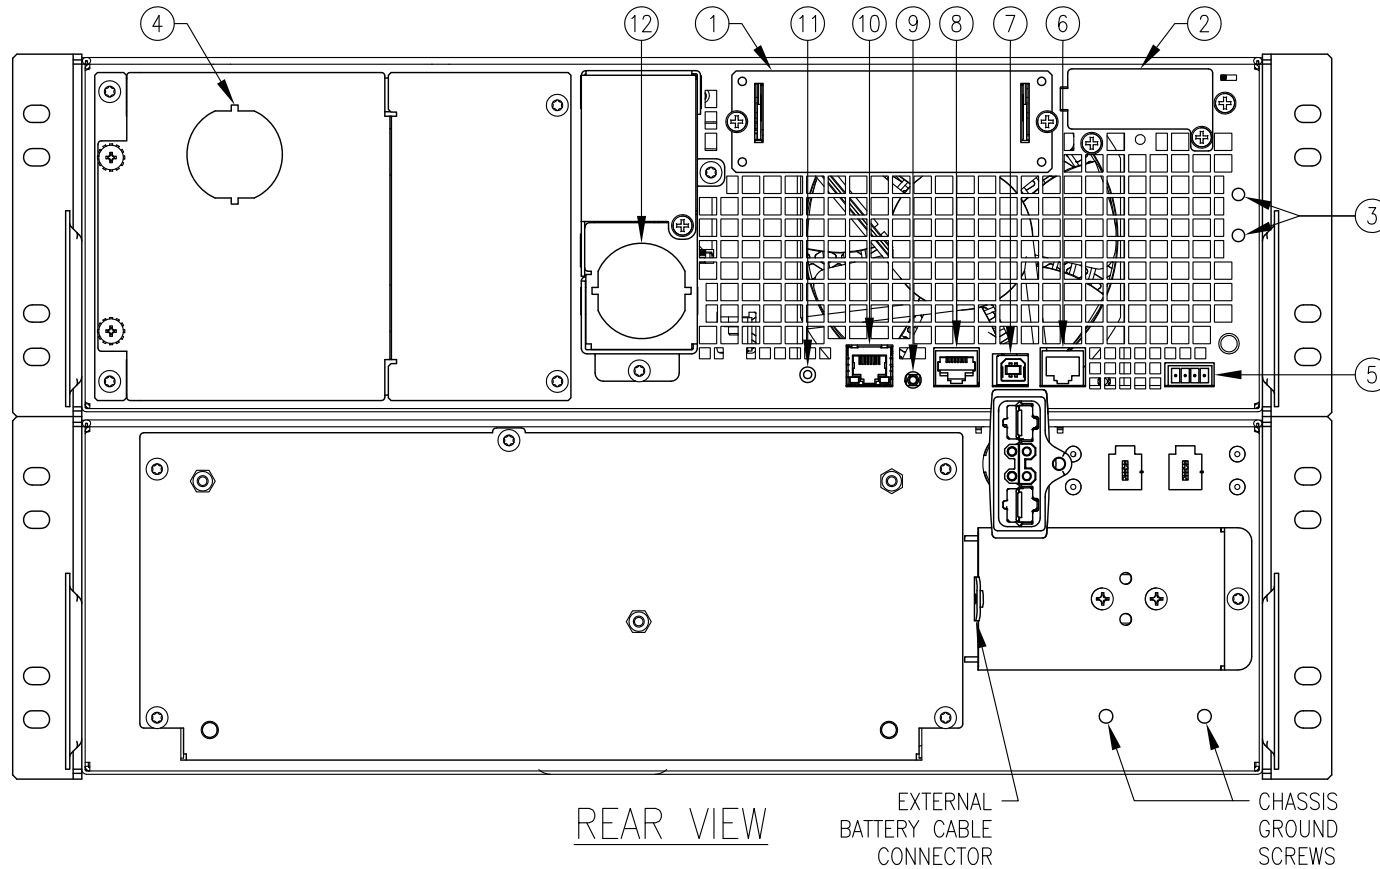

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
INPUT: 208/220/230/240VAC, 3W (L1+L2N+G), HARDWIRE  
OUTPUT: 208/220/230/240VAC, 3W, (L1+L2N+G), (1) HARDWIRE  
BAYED REAR VIEW

PROJECT: STD SUBMITTAL DRAWING SHEET 9 of 11

**DWG NO:** SRT5KRMXLW-HW+SRT192RMBP



**DRAWN BY:** S CUNHA 08-OCT-14

**ENGINEER:** C KUMARSWAMY 08-OCT-14

**APPROVED BY:** M BEG 08-OCT-14

REV 0

THIRD ANGLE PROJ

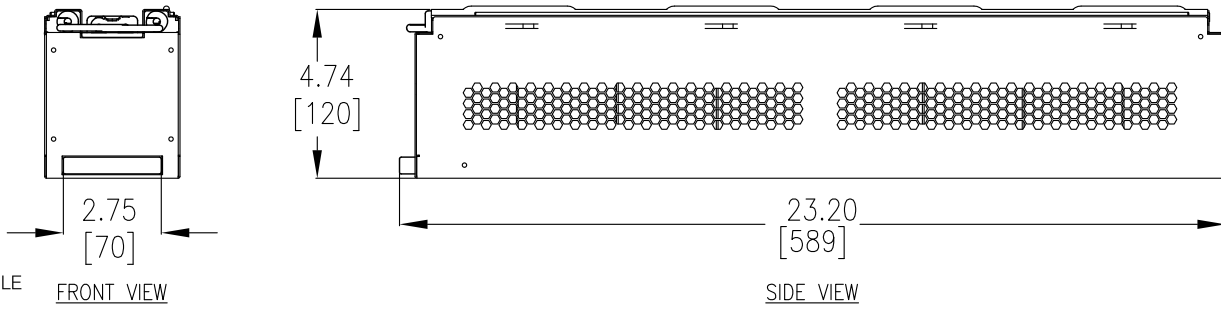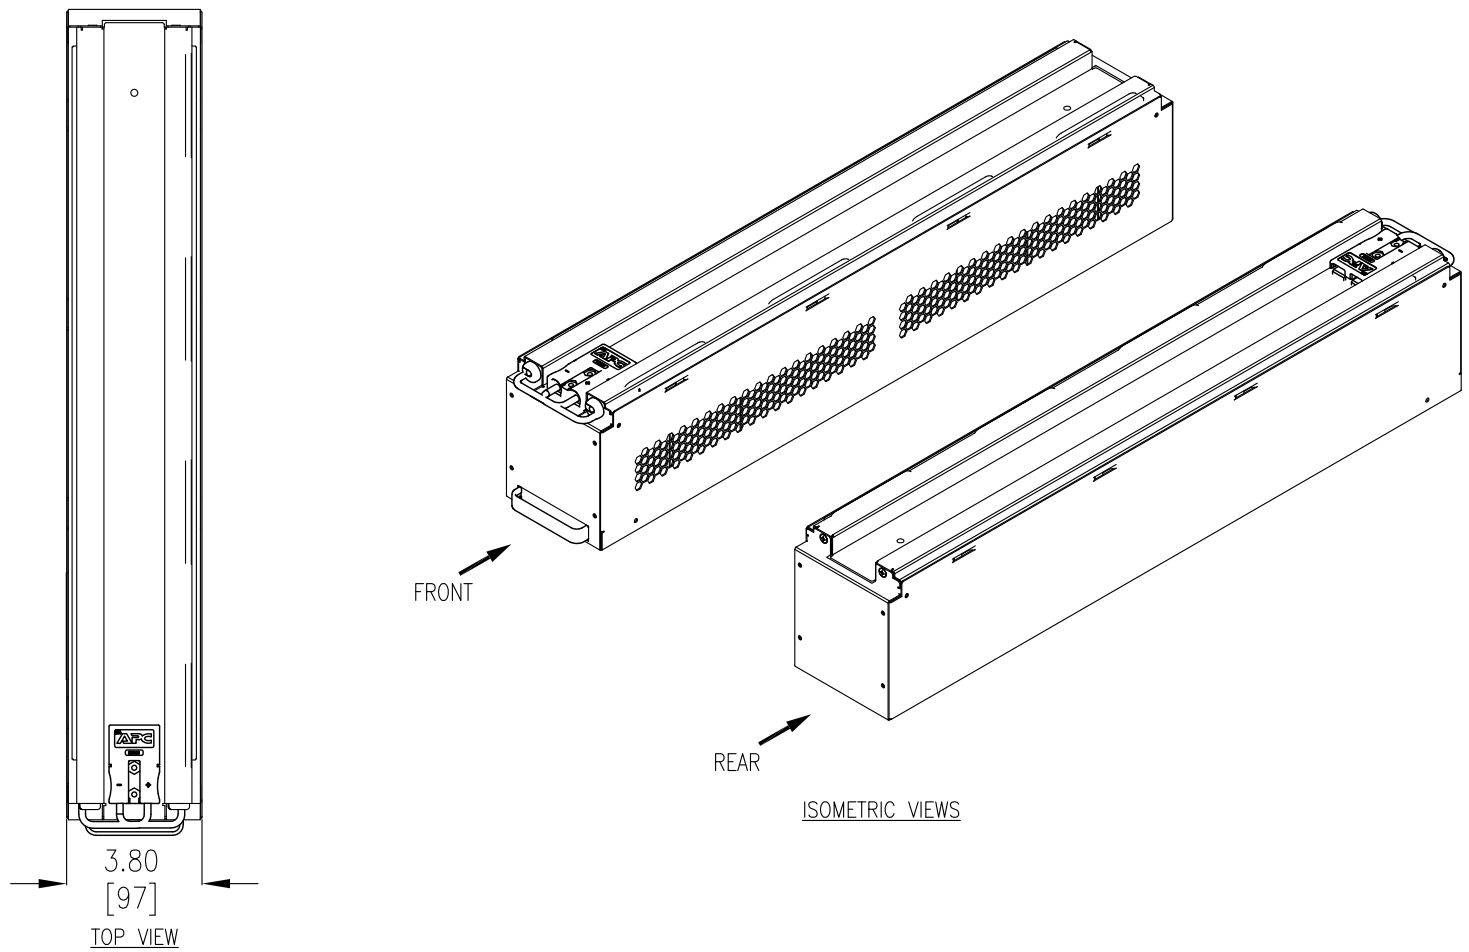

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. THE APC BATTERY REPLACEMENT CARTRIDGE, APCRBC140, CONSISTS OF (2) BATTERY MODULES.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: Smart-UPS On-Line (SRT)  
 SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
 INPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), HARDWIRE  
 OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
 APC REPLACEMENT BATTERY CARTRIDGE #140

PROJECT: STD SUBMITTAL DRAWING SHEET 10 of 11

DWG NO: SRT5KRMXLW-HW+SRT192RMBP


DRAWN BY: S CUNHA 08-OCT-14

ENGINEER: C KUMARSWAMY 08-OCT-14

APPROVED BY: M BEG 08-OCT-14

REV 0

THIRD ANGLE PROJ

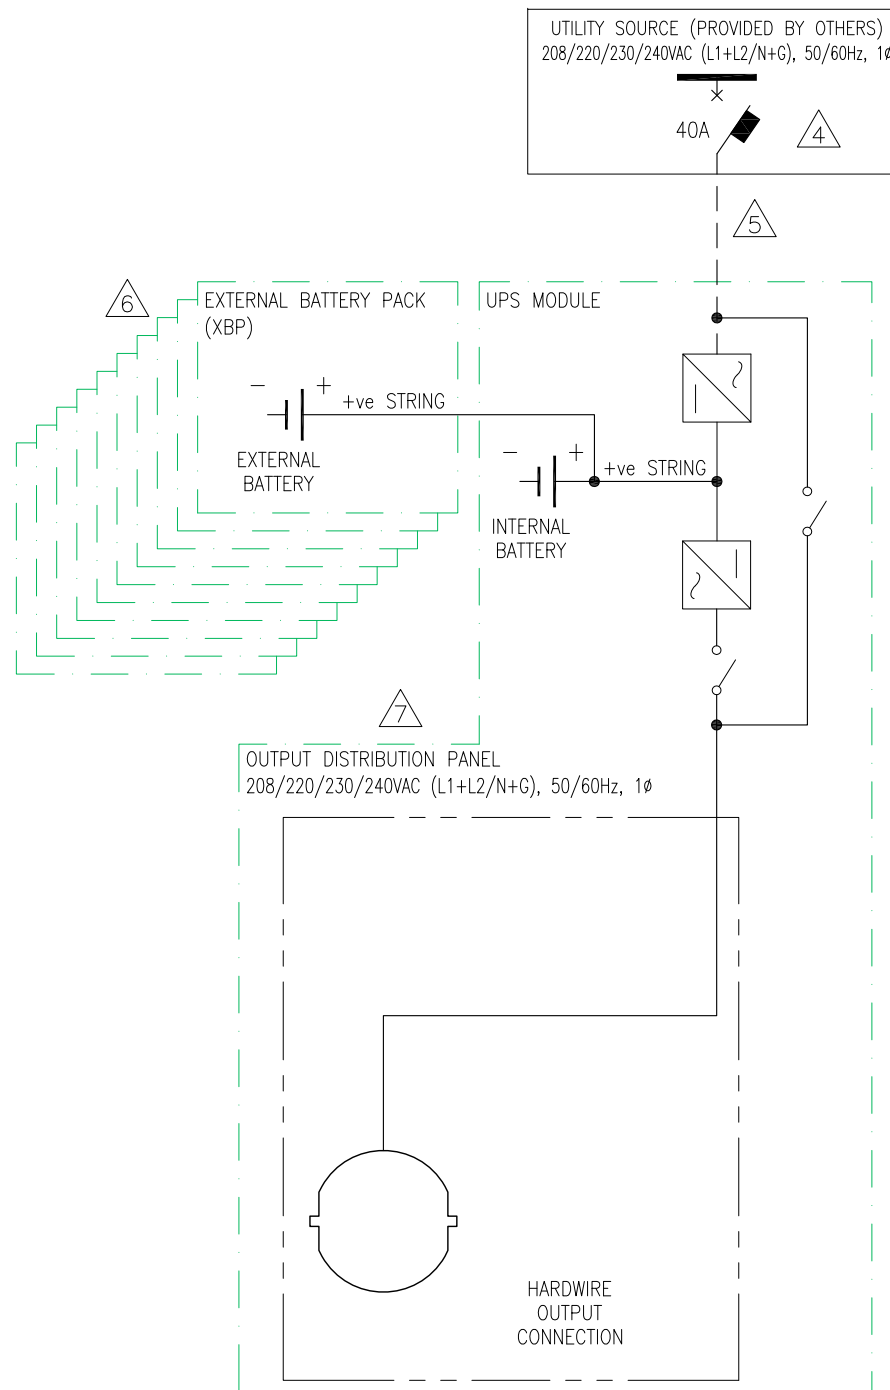

**NOTES:**

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. STD SUBMITTAL DRAWING DEPICTS POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF PHYSICAL LAYOUT. PLEASE REFER TO MECHANICAL STD SUBMITTAL DRAWINGS FOR MORE SPECIFIC PHYSICAL DATA.
- △4. UTILITY SOURCE MUST BE NOMINAL 208/220/230/240VAC (L1+L2/N+G), 50/60Hz, 1Ø, PROVIDED BY OTHERS.
- △5. DASHED LINES BETWEEN UNITS (-----) REPRESENT CABLING PROVIDED BY OTHERS.
- △6. ADDITIONAL EXTERNAL BATTERY PACKS (UP TO 10), CAN BE CONNECTED TO INCREASE THE RUN TIME FURTHER.
- △7. OPTIONAL SRT004 PDU PANEL CAN BE PURCHASED SEPARATELY AND FITTED IN PLACE OF THE EXISTING OUTPUT DISTRIBUTION PANEL TO PROVIDE ALTERNATIVE LOAD CONNECTIONS.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



**TITLE:** Smart-UPS On-Line (SRT)  
SRT5KRMXLW-HW + SRT192RMBP - RACK MOUNT  
INPUT: 208/220/230/240VAC, 3W (L1+L2/N+G), HARDWIRE  
OUTPUT: 208/220/230/240VAC, 3W, (L1+L2/N+G), (1) HARDWIRE  
SINGLE-LINE DIAGRAM

PROJECT: STD SUBMITTAL DRAWING SHEET 11 of 11

**DWG NO:** SRT5KRMXLW-HW+SRT192RMBP

**DRAWN BY:** S CUNHA 08-OCT-14

**ENGINEER:** C JAYARAMAN 08-OCT-14

**APPROVED BY:** M BEG 08-OCT-14

**REV** 0

**PROJ** ANGLE  
N/A