

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.
2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.





THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SMART-UPS SRT, 5kVA, TOWER ISOLATION / STEP-DOWN TRANSFORMER
INPUT: 208/240V, 1Ø, 60Hz w/ L6-30P & POWER CORD
OUTPUT: 5kVA, 110/120/208/220/240VAC, 1Ø, 60Hz
 UPS ISOMETRIC VIEWS

PROJECT: STD SUBMITTAL DRAWING **SHEET** 1 OF 4

DWG NO:	SRT5KTF		REV	0
DRAWN BY:	S CUNHA	16JUN2015	THIRD ANGLE PROJ	
ENGINEER:	E KOTLYAR	16JUN2015		
APPROVED BY:	K WHITE/J PRECOPIO	16JUN2015		

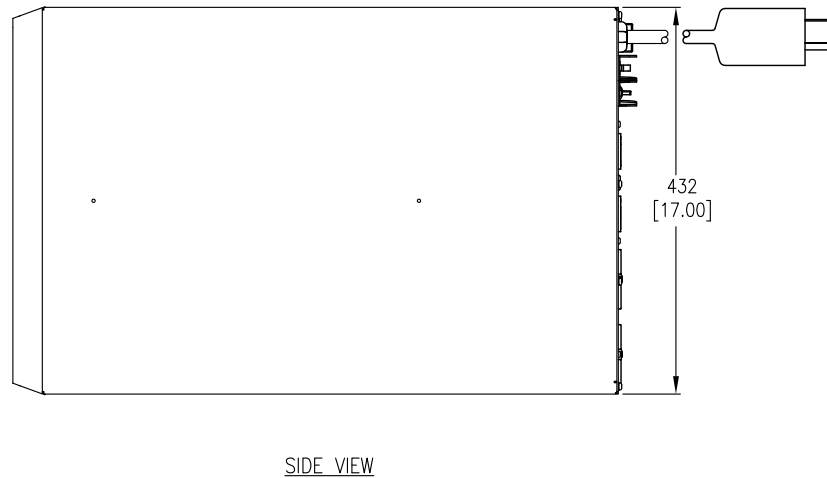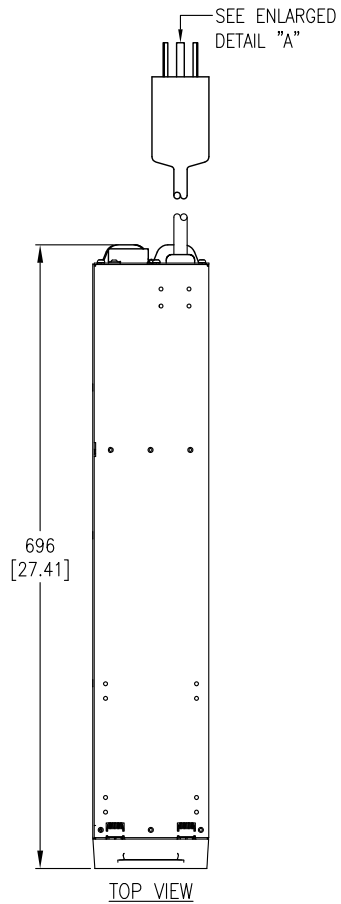

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
4. WEIGHT OF UNIT IS 56.82 KG [125.00 LBS].
5. LENGTH OF THE CORD IS 914mm [36.00in].

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SMART-UPS SRT, 5kVA, TOWER
ISOLATION / STEP-DOWN TRANSFORMER
INPUT: 208/240V, 1Ø, 60Hz w/ L6-30P & POWER CORD
OUTPUT: 5kVA, 110/120/208/220/240VAC, 1Ø, 60Hz
UPS MAIN MECHANICAL

PROJECT: STD SUBMITTAL DRAWING SHEET 2 OF 4

DWG NO: **SRT5KTF**

DRAWN BY: S CUNHA 16JUN2015

ENGINEER: E KOTLYAR 16JUN2015

APPROVED BY: K WHITE/J PRECOPIO 16JUN2015

REV 0


THIRD
ANGLE
PROJ

SUPPLIED WITH 208/220-240VAC,
A/C INPUT CORD & L6-30P PLUG
(SEE SHEETS 1 & 2)

OVERLOAD
PROTECTOR

(1) L14-30R, TWIST-LOCK;
220-240VAC, 110/220VAC,
50/60Hz, 30A

(1) L6-30R, TWIST-LOCK;
208VAC, 50/60Hz, 30A

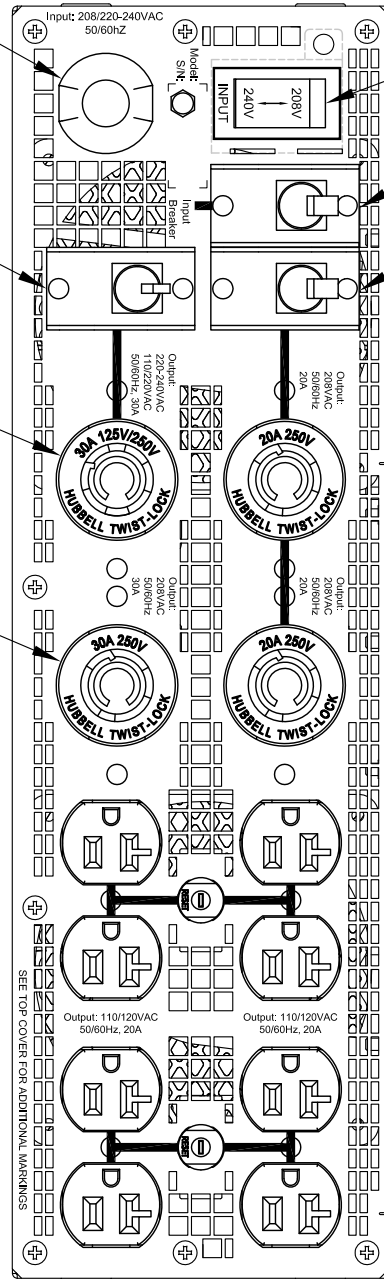

INPUT VOLTAGE SELECTOR
(SWITCH COVER REMOVED)

INPUT OVERLOAD
PROTECTOR

OVERLOAD
PROTECTOR

(2) L6-20R, TWIST-LOCK;
208VAC, 50/60Hz, 20A

(8) 5-20R, T-SLOT;
110/120VAC, 50/60Hz, 20A

REAR VIEW

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. CORD HAS BEEN OMITTED FOR CLARITY PURPOSES.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider
Electric

TITLE: SMART-UPS SRT, 5kVA, TOWER
ISOLATION / STEP-DOWN TRANSFORMER
INPUT: 208/240V, 1Ø, 60Hz w/ L6-30P & POWER CORD
OUTPUT: 5kVA, 110/120/208/220/240VAC, 1Ø, 60Hz
UPS REAR VIEW


PROJECT: STD SUBMITTAL DRAWING SHEET 3 OF 4

DWG NO: **SRT5KTF**


DRAWN BY:	S CUNHA	16JUN2015
ENGINEER:	E KOTLYAR	16JUN2015
APPROVED BY:	K WHITE/J PRECOPIO	16JUN2015

REV 0

THIRD
ANGLE
PROJ

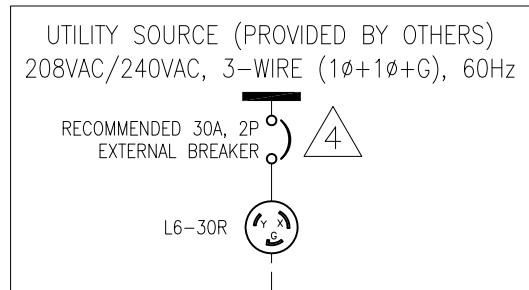

△5 POWER CORD CONNECTED OPTION

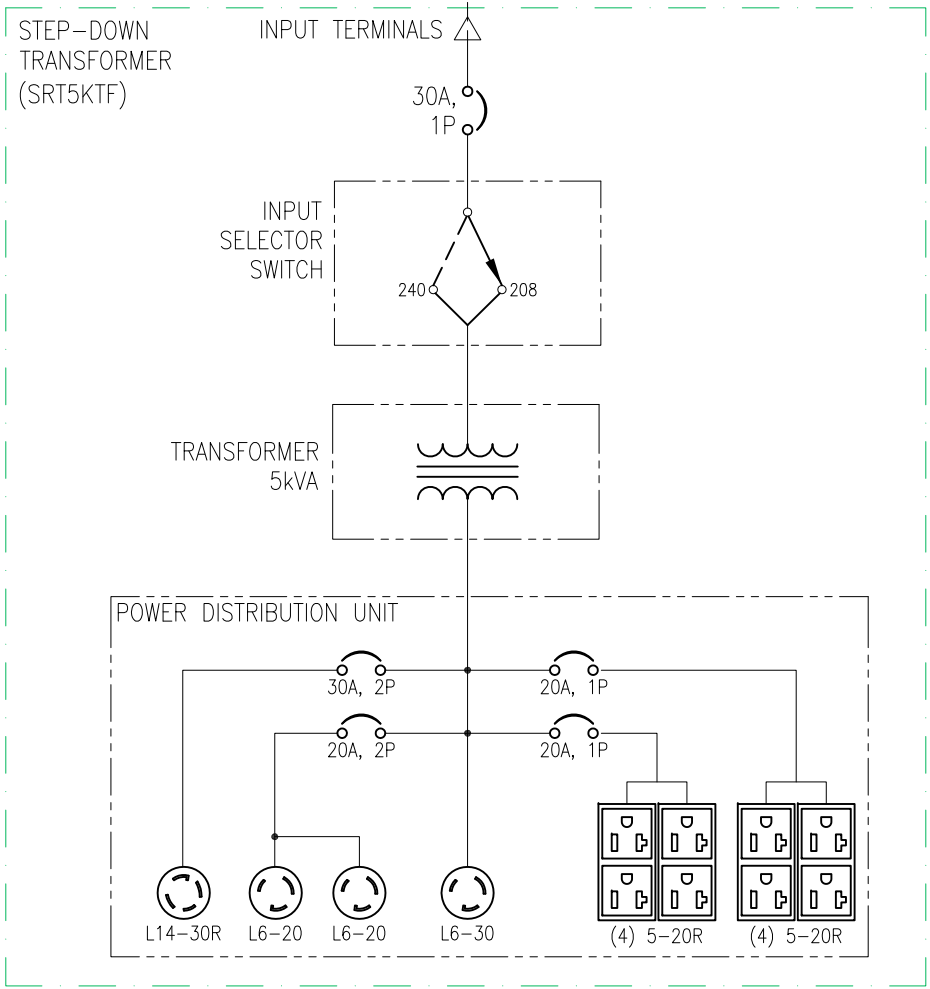

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. DRAWING DEPICTS POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF PHYSICAL LAYOUT. PLEASE REFER TO MECHANICAL DRAWINGS FOR MORE SPECIFIC PHYSICAL DATA.

- △4. UTILITY SOURCE MUST BE 3-WIRE (1Ø+1Ø+G), PROVIDED BY OTHERS.
- △5. POWER CORD (WITH L6-30P, TWIST-LOCK), PROVIDED BY Schneider Electric.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SMART-UPS SRT, 5kVA, TOWER ISOLATION / STEP-DOWN TRANSFORMER
INPUT: 208/240V, 1Ø, 60Hz w/ L6-30P & POWER CORD
OUTPUT: 5kVA, 110/120/208/220/240VAC, 1Ø, 60Hz
SYSTEM SINGLE-LINE DIAGRAM

PROJECT: STD SUBMITTAL DRAWING SHEET 4 OF 4

DWG NO:	SRT5KTF		REV	0
DRAWN BY:	S CUNHA	16JUN2015	PROJ	ANGLE
ENGINEER:	E KOTLYAR	16JUN2015		N/A
APPROVED BY:	K WHITE/J PRECOPIO	16JUN2015		