

NOTES:


- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
- SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION
- 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES[MILLIMETERS].
- 4. ADDITIONAL INPUT CORD (118.08IN [3000MM], LOCKING IEC-C19 TO L620P) IS SUPPLIED WITH THE UNIT.
- 5. NET WEIGHT OF UNIT IS 6.44LBS [2.93kG].
- 6. UNIVERSAL MOUNTING BRACKET IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSEURES. BRACKET IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
- 7. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
- REFER TO WARNING LABEL ON REAR OF UNIT FOR SCREW MOUNTING.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: RACK PDU 2G, METERED						
ZERO U, 16A/20A, 100-240V						
INPUT: IÉC-320 C20 OUTPUT: (18)IFC 320 C13 (2)IFC 320 C19						
OUTPUT: (18)IEC 320 C13, (2)IEC 320 C19 MAIN MECHANICAL						

ZERO U, 16A/20A, 100-240V INPUT: IEC-320 C20 OUTPUT: (18)IEC 320 C13, (2)IEC 320 C19	DWG NO: AP8858NA3			REV. 1	
INPUT: IEC-320 C OUTPUT: (18)IEC 320 C13. (2	:20 :)IEC 320 C19	DRAWN BY:	V BUSH	27-AUG-10	FIRST
MAIN MECHANICAL		ENGINEER: Y JIAN	G/T HORSTMANN	27-AUG-10	ANGLE
PROJECT: SUBMITTAL DRAWINGS	SHEET 1 OF 2	APPROVED BY:	B SHERIDAN	27-AUG-10	PROJ

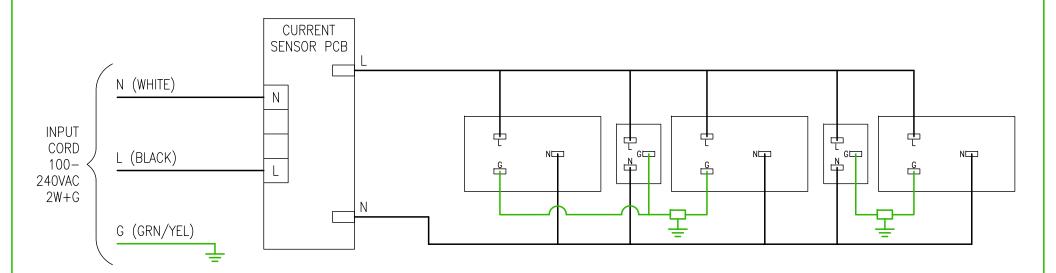

NOTES:

- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
- 2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION
- 3. THIS DRAWING DEPICTS THE POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF THE PHYSICAL LAYOUT. PLEASE REFER TO MECHANICAL DRAWINGS FOR PHYSICAL LAYOUT.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: RACK PDU 2G, METERED							
ZERO U, 16A/20A, 100-240V INPUT: IEC-320 C20							
INPUT: IEC-320 C20							
OUTPUT: (18)IEC 320 C13, (2)IEC 320 C19							
ELECTRICAL SCHEMÁTIC							

ZERO U, 16A/20A, 100-240V	DWG NO: AP8858NA3		REV.
INPUT: IÉC-320 C20 OUTPUT: (18)IEC 320 C13. (2)IEC 320 C19	DRAWN BY: V BUSH	28-0CT-10	PROJ
OUTPUT: (18)IEC 320 C13, (2)IEC 320 C19 ELECTRICAL SCHEMATIC	ENGINEER: Y JIANG/T HORSTMANN	28-0CT-10	ANGLE
PROJECT: SUBMITTAL DRAWINGS SHEET 2 OF 2	APPROVED BY: B SHERIDAN/M LEPARD	28-0CT-10	N.A.