


MULTIPLES OF TRIP CURRENT RATING

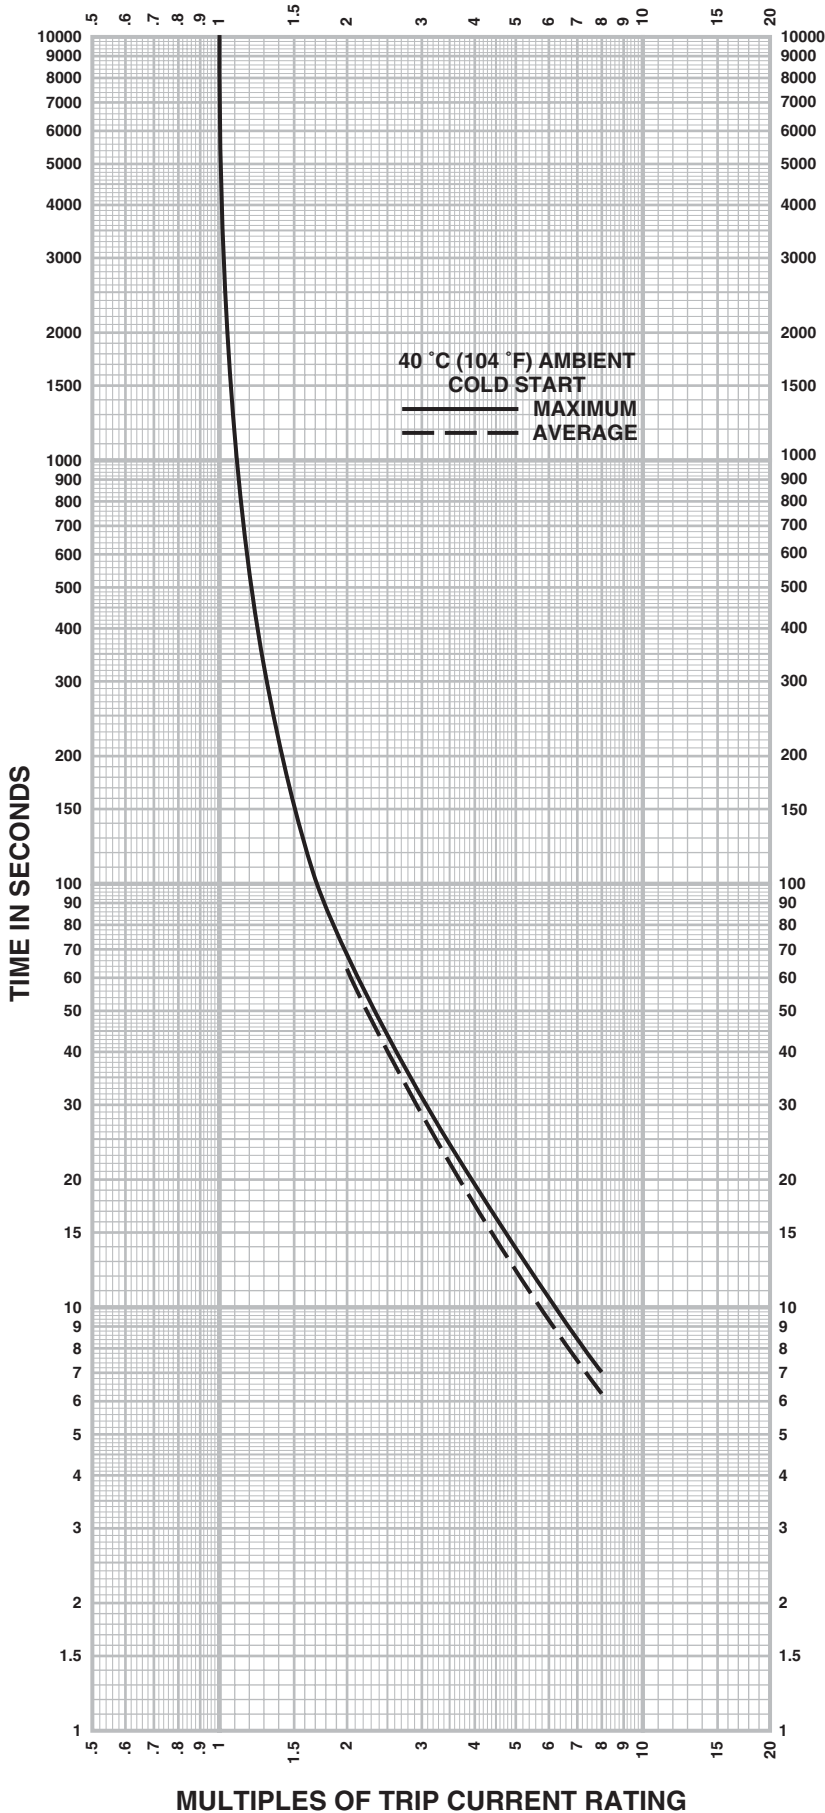

OVERLOAD RELAY TIME-CURRENT CHARACTERISTICS REFERENCE DRAWING NO. 30068-278

Relay Design	Melting Alloy
Thermal Unit Types	B1.16–B56

40 °C ambient cold start trip time characteristics of:

Equipment	AC Magnetic Starter
Size	1P
Type	SC
Series	A
Qty. of Thermal Units	1

When installed in:

- Small enclosure (Class 8536 only)
- Hinged door and all other (larger) enclosures

The trip current rating can be determined from the instructions given with the appropriate thermal unit selection table. The characteristics shown do not necessarily apply to equipment manufactured before the date of the referenced drawing.