5

10000

8000

7000

6000

TIME IN SECONDS

40 50 60 70 80 90 100

10000

8000

7000

6000







ED/EG/EJ FAMILY MOLDED CASE CIRCUIT BREAKERS

Circuit Breaker Prefix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
ED, EG, EJ	110–125	600Y/347	2, 3

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.

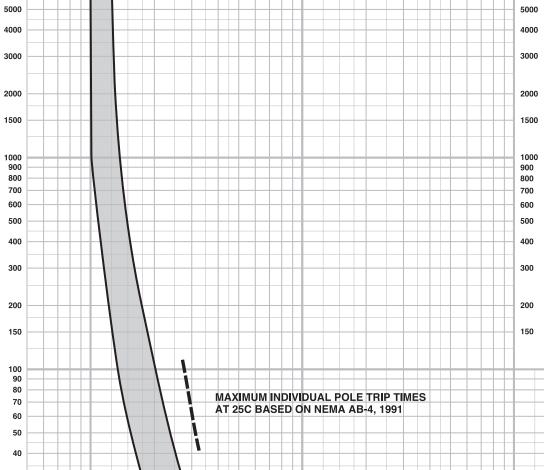

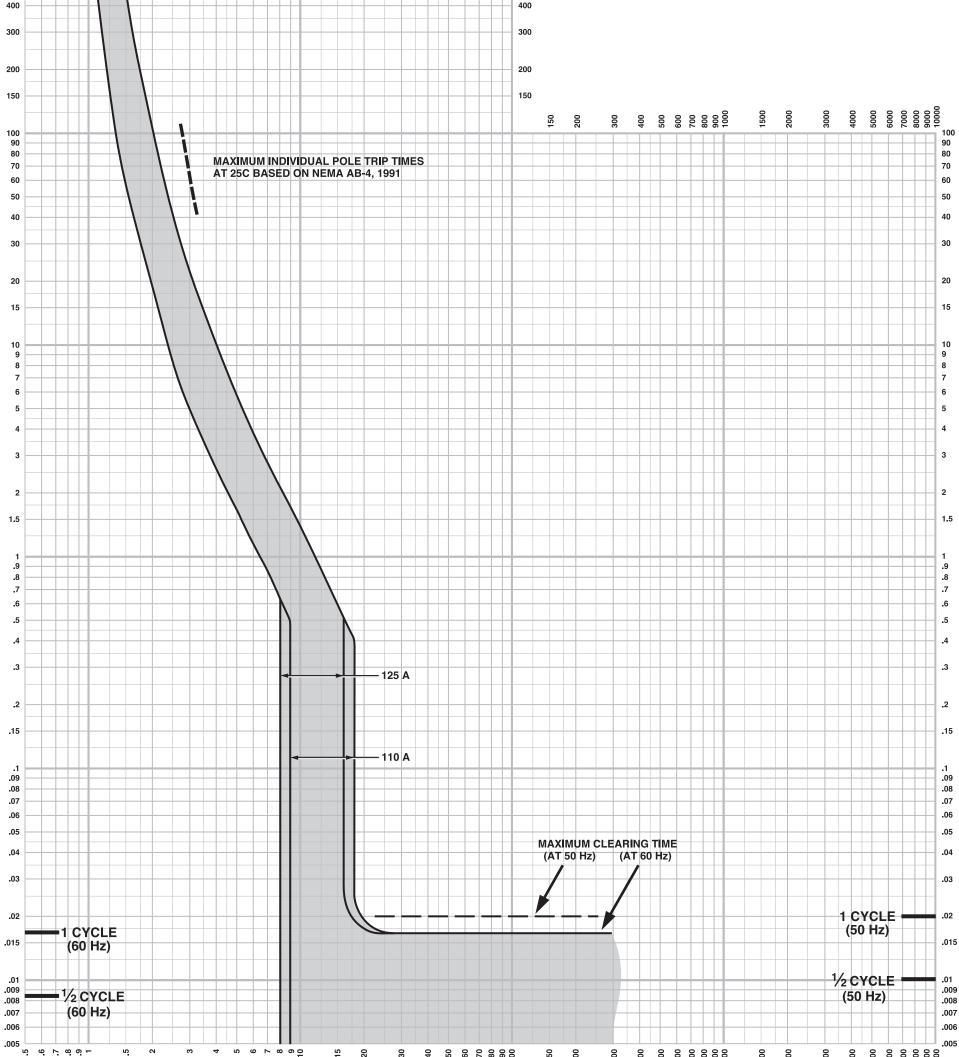

MULTIPLES OF RATED CURRENT SQUARE D

20



200

150

400 500 600 700 800 900

1500 2000

03 05 05 05 05 08 06 05

TIME IN SECONDS