

MULTIPLES OF RATED CURRENT


QO® MOLDED CASE CIRCUIT BREAKERS
CHARACTERISTIC TRIP CURVE NO. 730-5

CIRCUIT BREAKER INFORMATION

Circuit Breaker Prefix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
QO-K	30	120	1
QO-VH, QH	30	120/240	1, 2
QO-H	30	240	2
QO-HID, QO-VH, QH	30	240	3
QO, QOU, QO-HID	30-40	120/240	2
QO-PL	30-40	120/240	2
QO, QOU	30-40	240	3
QO-SWN	30 & 40	120	2
QO-SWN	30 & 40	120/240	3

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.


All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.

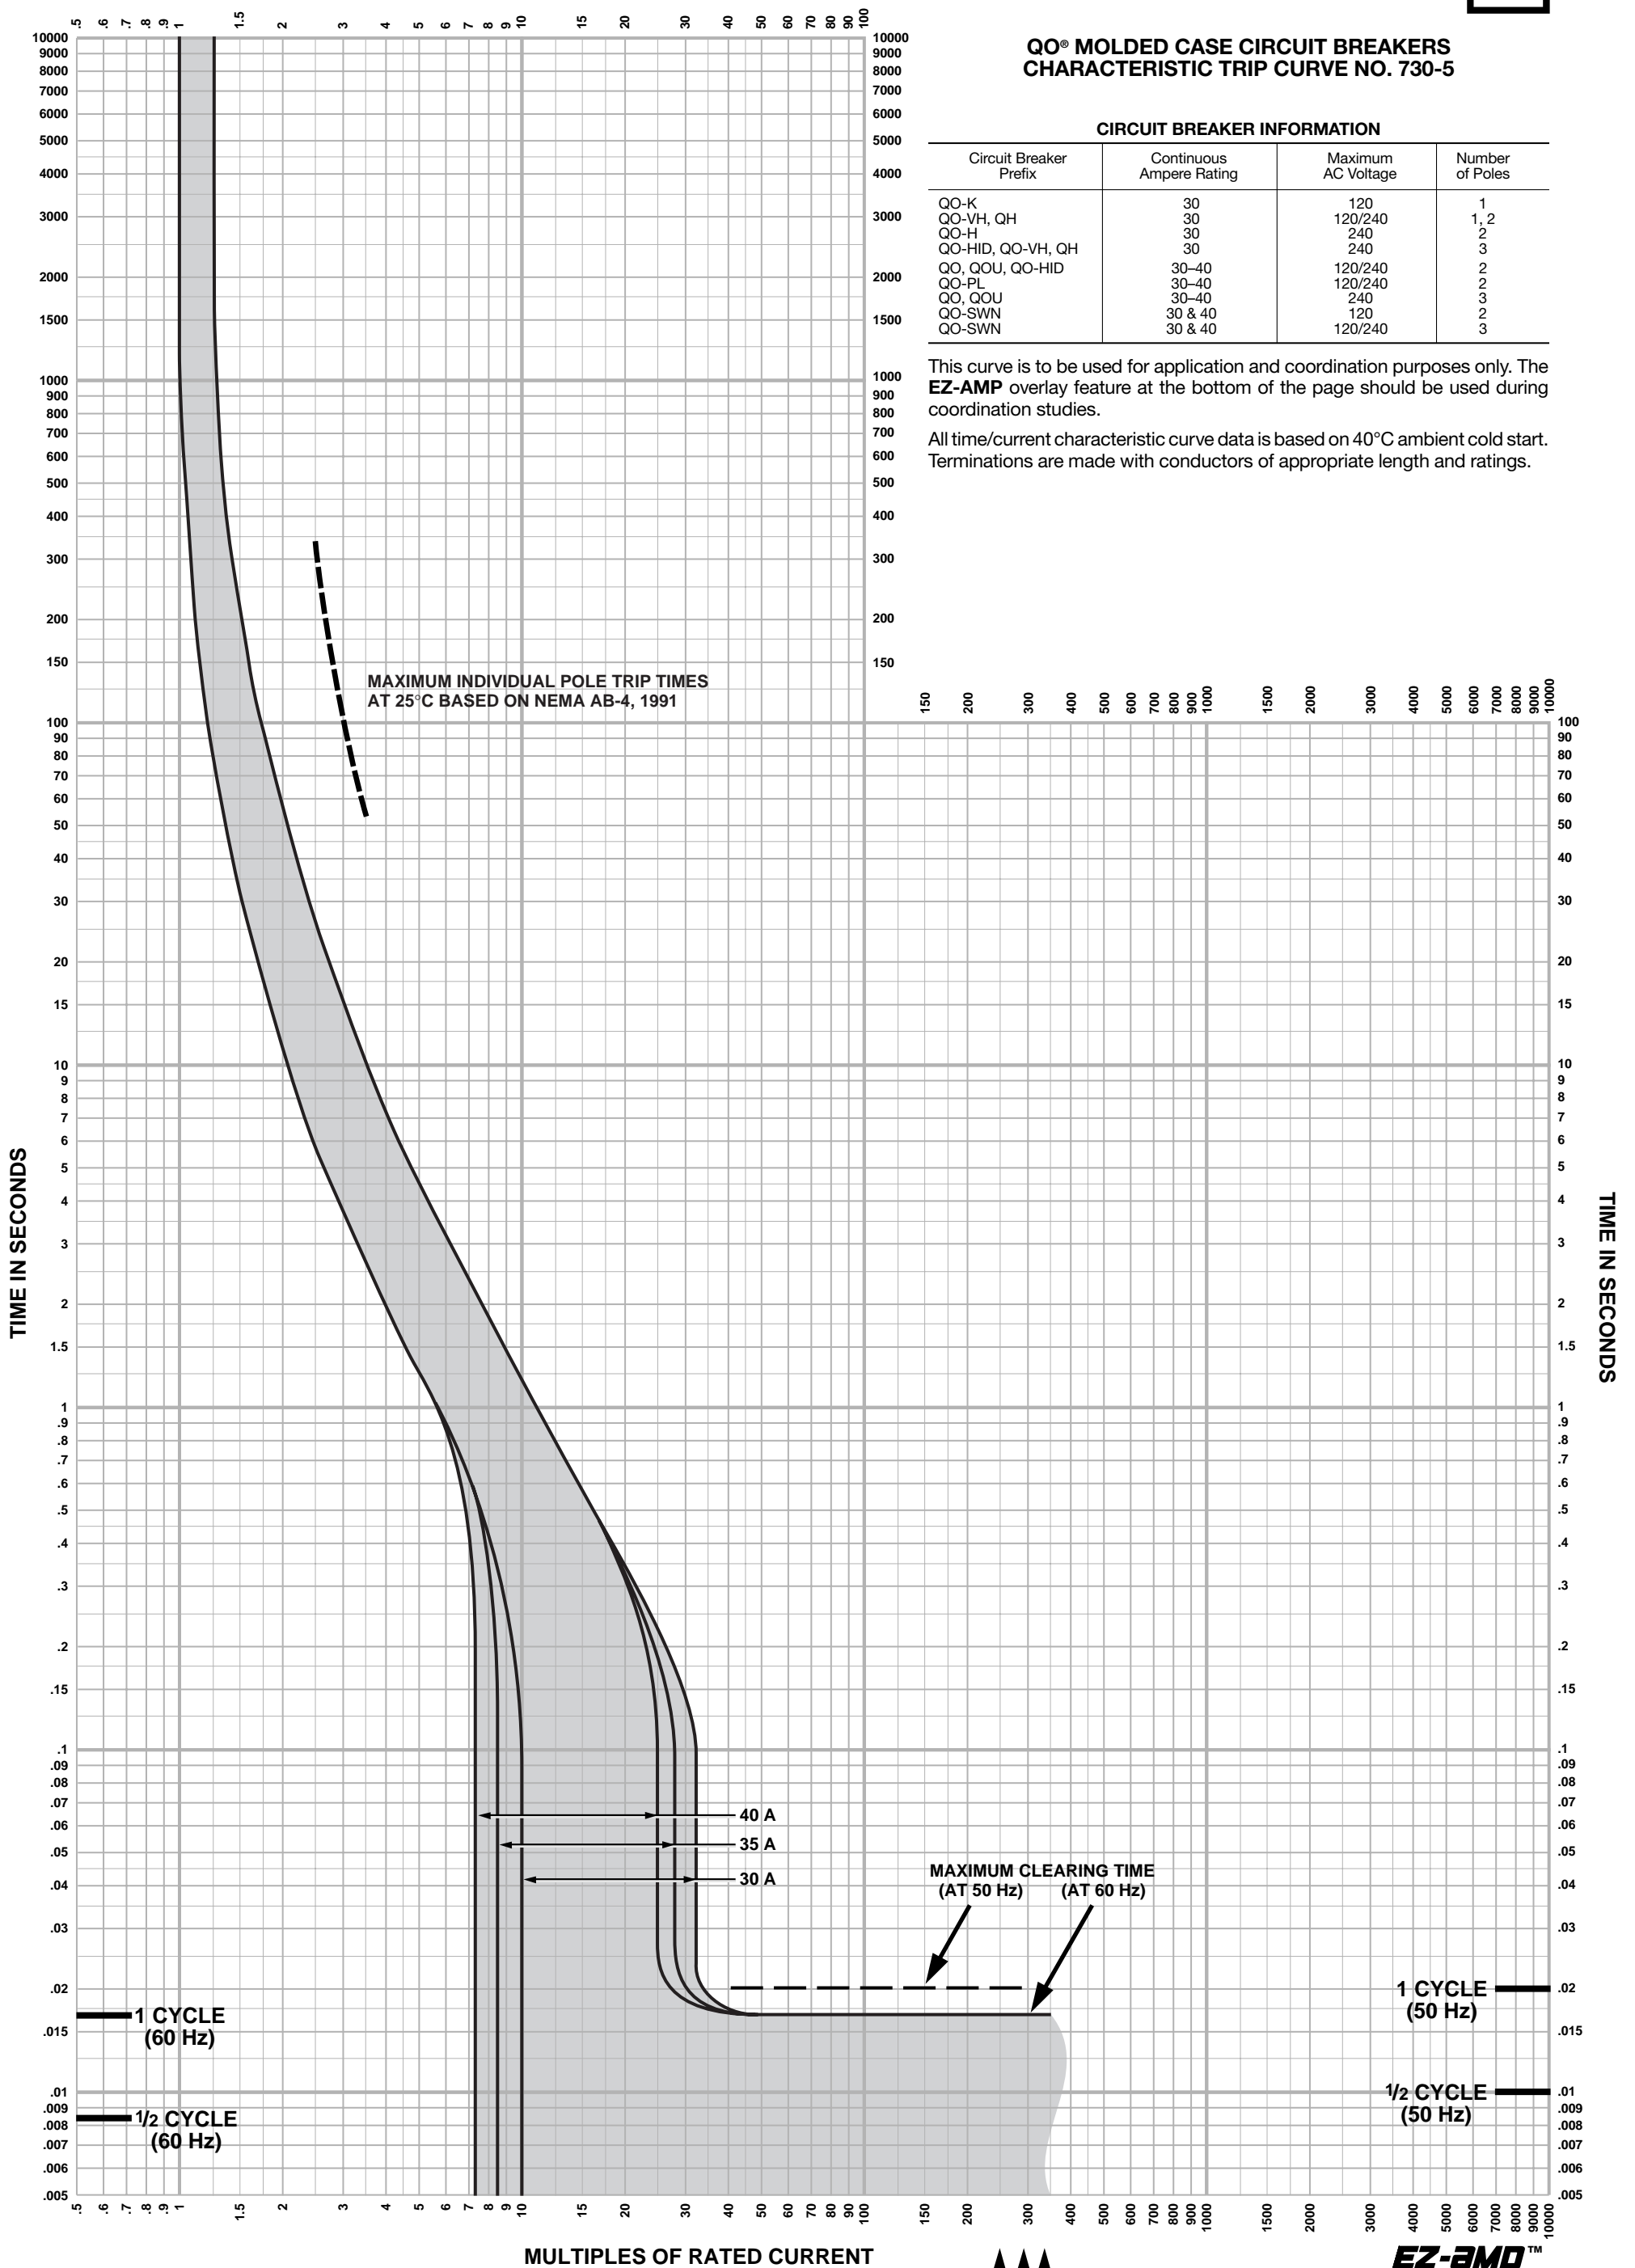

TIME IN SECONDS

TIME IN SECONDS

MULTIPLES OF RATED CURRENT



EZ-AMP™