



by **Schneider** Electric

Easy PDU Basic Rack Power Distribution Unit

Overview


EPDU1016B-GB

The APC by Schneider Electric Easy PDU, Basic Rack Power Distribution Unit distributes power to devices in the rack.

Outlets. The Rack PDU has eight (8) GB1002, 10A outlets.

Power cord. The power cord is 2.5 m (8.2 ft) in length, with IEC-320 C19 to GB (16A) connectors.

Mounting. Two brackets and mounting hardware are provided with the Rack PDU. The Rack PDU can be mounted in a 19-inch NetShelter™ rack or other EIA-310-D standard 19-inch rack.

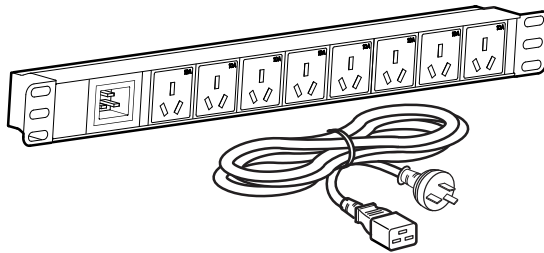

Specifications

Electrical	
Nominal Input Voltage	200 - 240 VAC
Maximum Input Current (Phase)	16A
Input Frequency	50/60Hz
Input Connection	IEC-320 C20 (16A)
Output Voltage	200 - 240 VAC
Maximum Output Current (Outlet)	10A
Maximum Output Current (Phase)	16A
Output Connections	IEC 320 C13 (10A)
Output Quantities	Eight (8)
Physical	
Dimensions (H x W x D)	44.4 x 482 x 44.4 mm (1.75 x 19 x 1.75 in)
Input power cord length	2.5 m (8.2 ft)
Shipping dimensions (H x W x D)	150 x 560 x 80 mm (3.8 x 22.8 x 3.15 in)
Weight/Shipping weight	0.58 kg (1.27 lb) / 1.18kg (2.60 lb)
Environmental	
Maximum elevation (above MSL) Operating/Storage	0–3000 m (0–10,000 ft) / 0–15000 m (0–50,000 ft)
Temperature: Operating/Storage	–5 to 45°C (23 to 113°F) / –25 to 65°C (–13 to 149°F)
Humidity: Operating/Storage	5–95% RH, non-condensing
Compliance	
EMC verification	CE EN55035, EN55032, EN55024
Safety verification	CE, TUV, EN/IEC62368-1
CE EU Contact Address	Schneider Electric, 35 rue Joseph Monier 92500 Rueil Malmaison France
Environmental	RoHS & Reach

Customer support and warranty information are available on the APC by Schneider Electric website, www.apc.com.

© 2019 APC by Schneider Electric. APC and the APC logo are owned by Schneider Electric S.E. All other trademarks are property of their respective owners.

990-91338
11/2019