


## NOTES:

- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
- 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
- 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES[MILLIMETERS].
- 4. NET WEIGHT OF UNIT IS 15.04 lb [6.84 kg].
- LENGTH OF THE CORD IS 120.00 In [3050 mm].
- UNIVERSAL MOUNTING BRACKET IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURES. BRACKET IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
- 7. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
- 8. REFER TO WARNING LABEL ON REAR OF UNIT FOR SCREW MOUNTING.

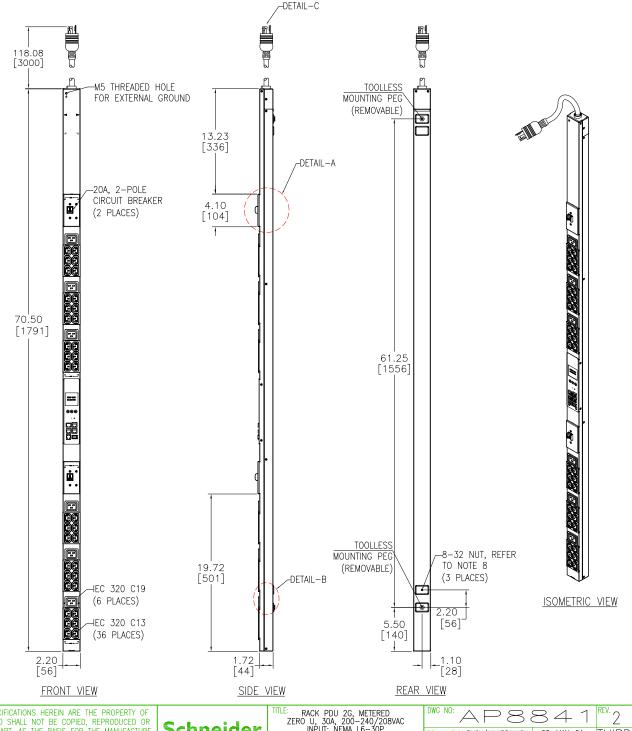


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider **Electric** 

E: RACK PDU 2G, METERED ZERO U, 30A, 200-240/208VAC INPUT: NEMA L6-30P PUT: (36)IEC 320 C13, (6)IEC 320 C19 GENERAL ARRANGEMENT OUTPUT:

05-MAY-21 THIRD DRAWN BYY BUSH/JAYAPRAKASH ANGLE **ENGINEER** KATIE BURKE 06-MAY-21 PROJ PROJECT: SUBMITTAL DRAWINGS | SHEET | 1 OF 2 | APPROVED BY: KATIE BURKE 06-MAY-21

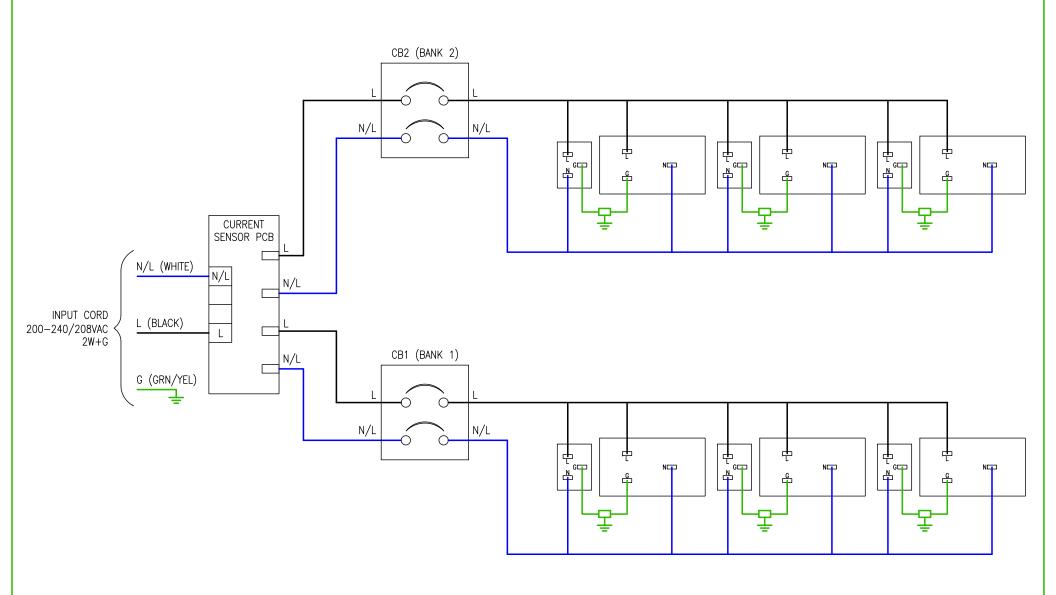

## NOTES:

- 1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
- 2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
- 3. THIS DRAWING DEPICTS THE POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF THE PHYSICAL LAYOUT. PLEASE REFER TO MECHANICAL DRAWINGS FOR PHYSICAL LAYOUT.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: RACK PDU	J 2G, METERED
ZERO U, 30A,	200-240/208VAC
INPUT: N	IEMA L6-30P
OUTPUT: (36)IEC 3:	20 C13, (6)IEC 320 C19
ELECTRIC	200-240/208VAC 200-240/208VAC IEMA L6-30P 20 C13, (6)IEC 320 C19 AL SCHEMATIC

TITLE: RACK PDU 2G, METERED ZERO U, 30A, 200-240/208VAC		DWG NO: AP8841				1 REV. 1
INPUT: NEMA L6-30P OUTPUT: (36)IEC 320 C13. (6)IEC 320 C19	DRAWN BY:	JAYAF	PRAKASH	05-MAY-2	1 PROJ	
OUTPUT: (36)IEC 320 C13, (6)IEC 320 C19 ELECTRICAL SCHEMATIC		ENGINEER:	KAT	ie Burke	06-MAY-2	1 ANGLE
PROJECT: SUBMITTAL DRAWINGS	SHEET 2 OF 2	APPROVED	BY: KATIE	BURKE	06-MAY-2	1 N.A