


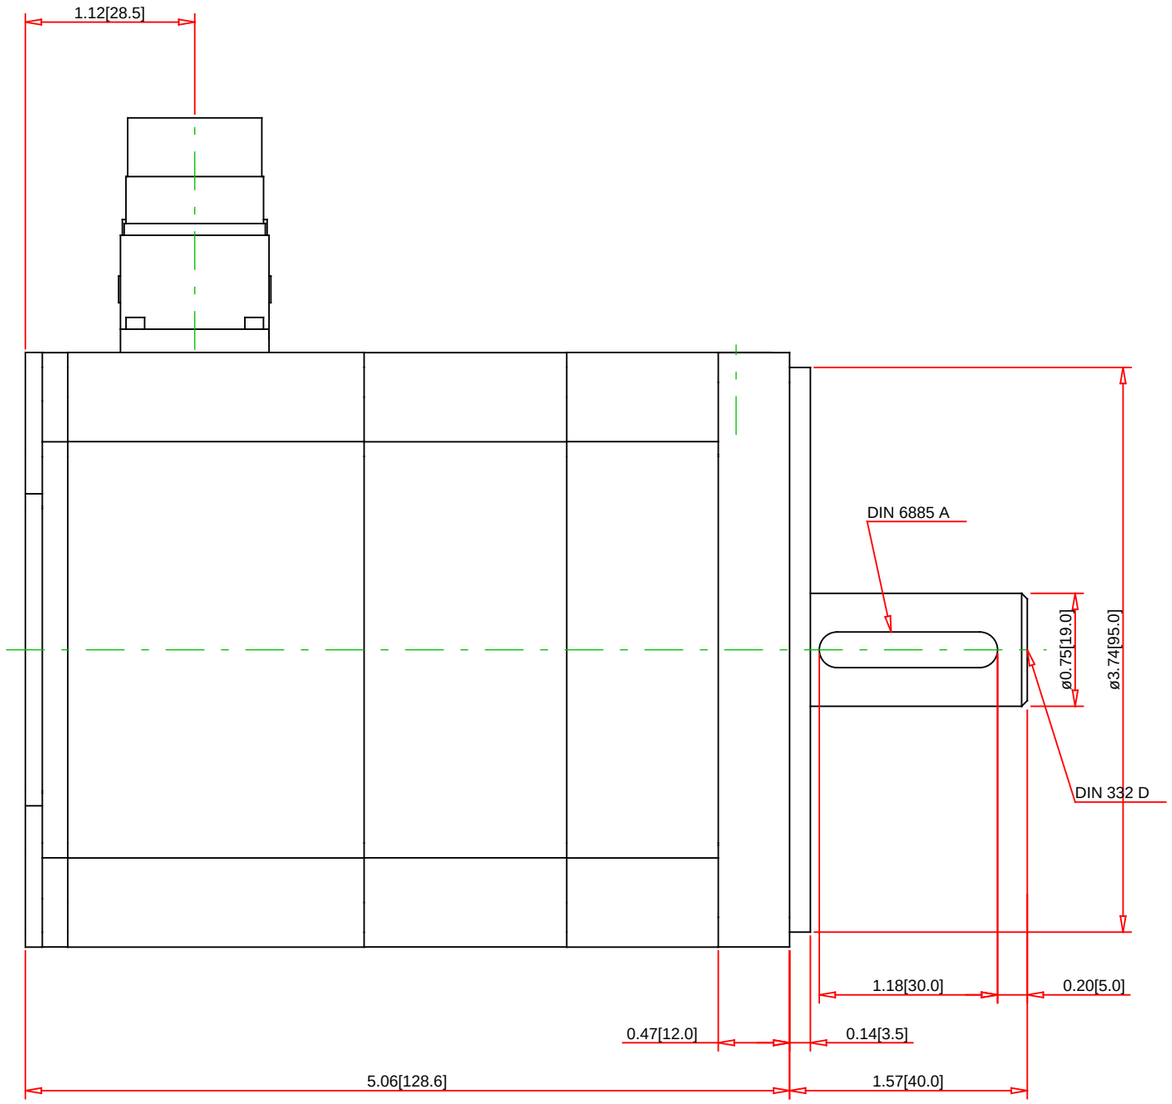


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

# BMH1001T32A1A

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com
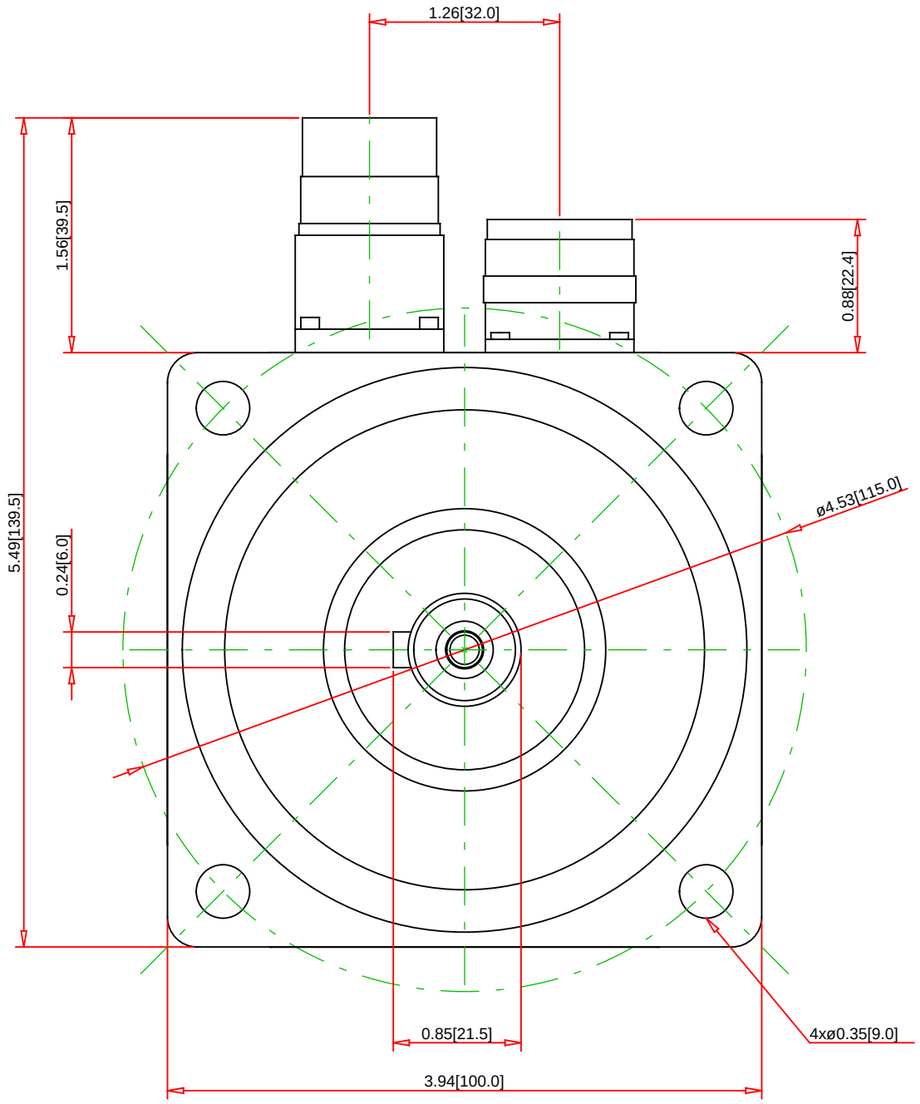
## Technical Information:

| | |
|---|---|
| Frame Size (mm): | 100 |
| Degree of Protection (Shaft / housing): | IP65 /I P65 |
| Maximum Current (Arms): | 18.2 |
| Holding brake: | No |
| Encoder Type: | ABS Multi turn 128 Sin/Cos period |
| Torque Constant (Nm/A) | 0.67 |
| CSA: | Yes |
| RoHS: | Yes |
| Weight without brake (kg / lb): | 7.36 / 3.34 |

## Specification:

| | |
|---|---|
| Description: | |
| Family: | BMH |
| Maximum Permissible Speed (rpm): | 6000 |
| Continuous Stall Torque (Nm / lbs-in): | 3.4 / 30.1 |
| Peak Torque (Nm / lbs-in): | 10.2 / 90.28 |