

Circularity Profile

Lexium 62 Power Supply





DANGER


HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH


- Disconnect all power from all equipment including connected devices prior to removing any covers or doors, or installing or removing any accessories, hardware, cables, or wires except under the specific conditions specified in the appropriate hardware guide for this equipment.
- Wait 5 minutes to allow the internal capacitors to discharge.
- Always use a properly rated voltage sensing device to confirm the power is off where and when indicated.

Failure to follow these instructions will result in death or serious injury.



End of Life Instructions

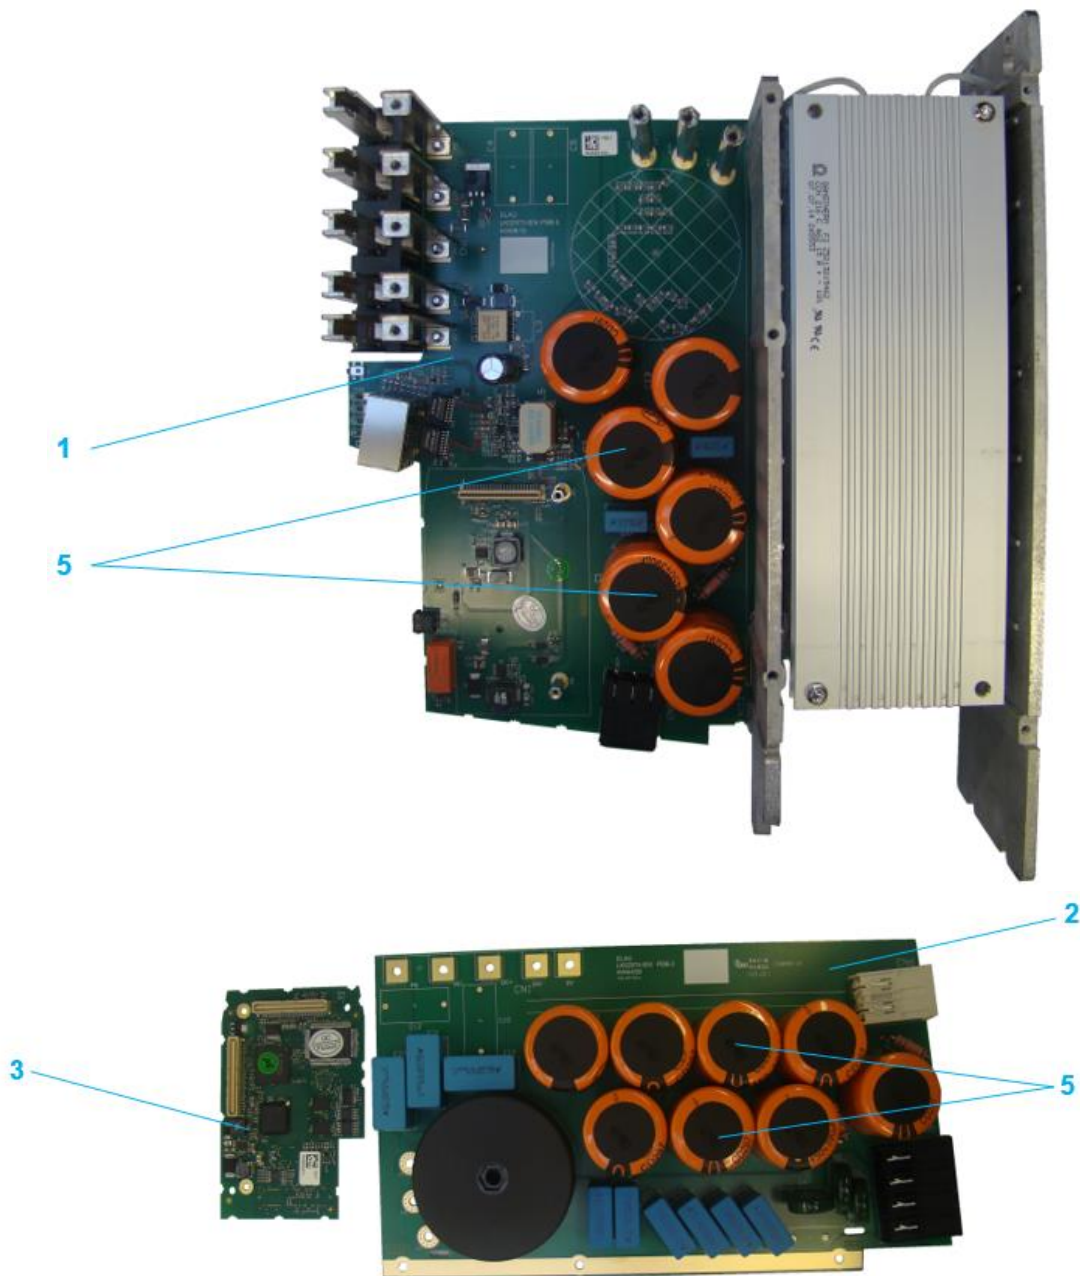

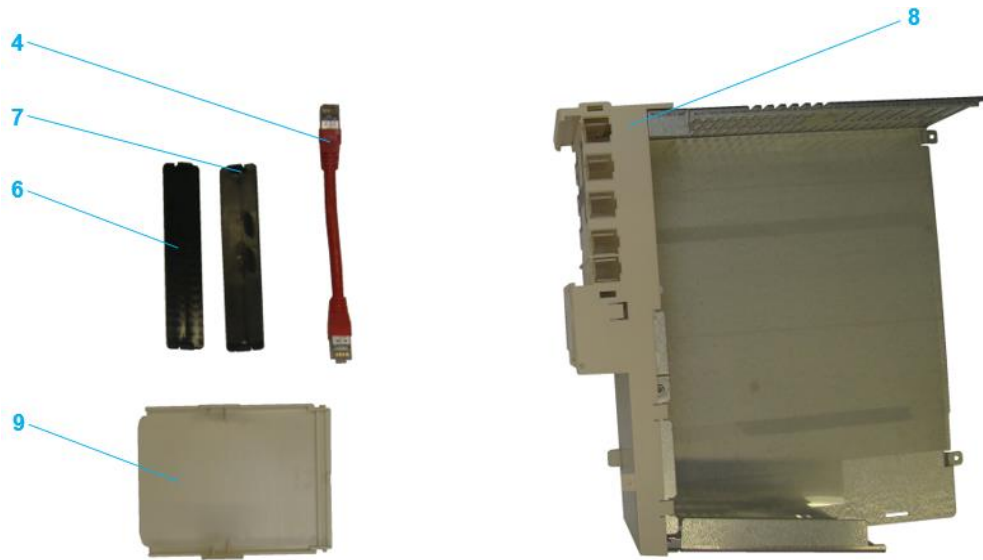

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Power) > 10cm ²	3341,88	
To be depolluted	2	Electronic Board (Power) > 10cm ²	1086,1	
To be depolluted	3	Electronic Board (Power) > 10cm ²	36,71	
To be depolluted	4	Cable (low current)	16,05	
To be depolluted	5	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	780,78	
To be dismantled	6	Shock Protector left	9,32	
To be dismantled	7	Shock Protector right	9,78	
To be dismantled	8	Front panel	90,26	
To be dismantled	9	Front flap	20,67	



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The modular servo drive system Lexium LXM62 is designed for the operation of servo drives in a multi-axis group. Using a common DC bus, the central power supply supplies the connected servo converters with the power required.
Product reference	LXM62PD84A11000
Additional similar product references	LXM62PD84A11000 LXM62PD20A11000
Total representative product mass	6227 g
Representative product dimensions	310mm x 89,5mm x 270mm
Date of information release	08/2020



Additional information

Legal information

This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Recyclability potential

61%

Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

*Country Customer Care Center
<http://www.schneider-electric.com/contact>*

*35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €*

www.schneider-electric.com

ENVEOL1406028_V2

Published by Schneider Electric

© 2020 - Schneider Electric – All rights reserved

08/2020