


Note:  
 - Drawings Not To Scale  
 - Drawings Subject to Change Without Notice  
 - Dimensions are inches next to [Millimeters]

Part No.:

**RE22R1MYMR**

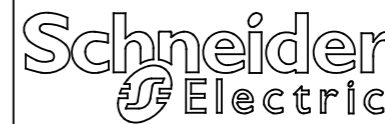

Schneider Electric United States  
 North American Division  
 Boston One Campus  
 800 Federal Street  
 Andover, MA 01810, USA  
 Phone:+1 8773425173  
 Email: CCC@us.schneider-electric.com

Technical Information:

Max. Switching Current:	8A
Max. Switching Voltage:	250 V
Max. Power Consumption:	3VA (AC), 1.5W (DC)
Input Signals	Y1 - Control Signal, X1 - Pause Signal, Z1- Ext Potentiometer
Function Available:	A, At, Aw, Ac, Act, C, Ct, D, Dt, Dw, Di, Dit, Diw, H, Ht, Hw, W, Wt
Function Description:	Multi-function
Time Ranges:	0.05 s to 300 h
Type of Output:	Relay
Contact Configuration:	SPDT

Specification:

Description:	Timer, 24-240 VAC/VDC Input, 8A SPDT Relay Output, Multi-function
Ambient Storage Temp.:	-40 to +70 °C (-40 to +158 °F)
Ambient Operating Temp.:	-20 to +60 °C (-4 to +140 °F)
Degree of Protection Term. Block:	IP20
Degree of Protection Housing:	IP40
Electrical Life @ Rated Load:	100,000 cycles
Mechanical Life @ Rated Load:	20,000,000 cycles
Dial Settings:	Range = 1s to 300h, Time setting = 1 to 10, Function = A, C, D, Di, H, W, Ac
Mounting:	35 mm DIN Rail