


**Note:**  
 - Drawings Not To Scale  
 - Drawings Subject to Change Without Notice  
 - Dimensions are inches next to [Millimeters]

Part No.:

**XMLBL35R2S11**

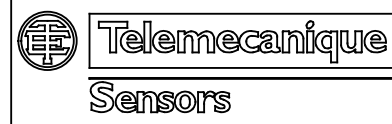

Telemecanique Sensors  
 1875 Founders Drive  
 Dayton, OH 45420-4017  
 Customer Care Center : 1-800-435-2121  
 Web : www.tesensors.com

**Technical Information:**

Fluid Characteristics:	Hydraulic oil, air (32°F to 320°F)
Enclosure Rating:	IP66 conforming to IEC/EN 60529
Certifications:	UL / CSA / CE
RoHS:	Yes
Materials in contact w/fluid:	Stainless Steel, Steel, FPM, FKM
Precision:	n/a
Drift:	n/a
Output response time:	n/a
Voltage Limits:	n/a
Current Consumption:	n/a
Ambient air temp. for operation:	-13°F to +158°F (-25°C to 70°C)
Vibration Resistance:	2 gn
Shock Resistance:	30 gn
Repeat Accuracy:	< 2%
Operating rate:	<= 120 (for temperature > 32° F)
Weight:	5.67 lb

**Specification:**

Description:	IEC OsiSense Electromechanical Control Circuit Rated Pressure Switches - XMLA, B, C, D
Pressure Range:	0.65 to 5.07 psi
Max. Allowable Pressure:	Per Cycle: 18.2 psi - Occasional Surge: 32.62 psi
Differential Type:	Adjustable
Output:	Contacts
Electrical Connection:	PG 13.5 Metric threads
Differential:	.60 to 4.35 psi
Fluid Connection:	G 1/4 F BSPP
Actuator Type:	diaphragm
Rated Supply voltage:	240VAC - 1.5 A, 120VAC - 3 A, 250 VDC - 0.1 A
Continuous Current Rating:	10 Amps