

**Firetrol**<sup>®</sup>

**Mark IIxG Medium  
Voltage Electric Fire  
Pump Controllers**



**ASCO** Power  
Technologies<sup>®</sup>

Firetrol® FTA2000 combined automatic and manual class E2 medium voltage controllers are intended for starting squirrel cage motors driving listed fire pumps.

## Ratings

The maximum controller ratings are as follows:

- 1500 HP (1119 kW) @ 2300 Volts
- 2000 HP (1492 kW) @ 3300 Volts
- 2500 HP (1865 kW) @ 4160 Volts
- 3000 HP (2238 kW) @ 5500 Volts
- 3000 HP (2238 kW) @ 6000 Volts
- 3250 HP (2425 kW) @ 6300 Volts
- 3500 HP (2611 kW) @ 6600 Volts
- 3500 HP (2611 kW) @ 6900 Volts
- 3500 HP (2611 kW) @ 7200 Volts

## Approvals

Firetrol fire pump controllers are listed by Underwriters Laboratories, Inc., in accordance with UL 218, Standard for Fire Pump Controllers, CSA, Standard for Industrial Control Equipment (cUL), and approved by Factory Mutual. They are built to meet or exceed the requirements of the approving authorities as well as NEMA and the latest editions of NFPA 20, Standard for the Installation of Stationary Pumps for Fire Protection, and NFPA 70, National Electrical Code.

## Features

The Firetrol® Mark IIXG medium voltage fire pump controller monitors, displays and records fire pump system information. The system is standard on all Firetrol medium voltage electric fire pump controllers. The standard USB host controller and port allows recording of events/alarms to a Flash Memory Disk. Depending on the capacity of the flash disk utilized, the amount of data saved could easily cover the lifetime of the controller. The data is recorded in text (.txt file) format and can easily be reviewed using popular software such as Microsoft® Word® or Excel®.

Door mounted display/interface panel featuring a 128 x 64 pixel backlit LCD Graphical Display, Membrane Type User Control Push-buttons and easy to read LED Indicators for:


- Alarm
- System Pressure Low
- Pump Running
- Deluge Open
- Remote Start
- Interlock On
- Fail To Start
- Motor Overload
- Phase Failure
- Phase Reversal
- Automatic Shutdown Disabled
- Overvoltage
- Undervoltage

## Other features include:

- Isolating switch - NEMA rating, 7200 Volts, 400 Amps with external operating handle and both electrical and mechanical interlocks to prevent opening of the medium voltage compartment door with the isolating switch or the main contactor closed.
- Fuses - current limiting motor starting main fuses.
- Vacuum contactor - NEMA rating, 7200 Volts, 400 Amps.
- Control transformer with fused primary and secondary.
- Simultaneous 3 phase display of both voltage and current.
- Pressure display in PSI or Bars in 1 psi increments (0.1 bar)
- Operators for START, STOP, NORMAL-OFF-TEST and manual EMERGENCY RUN.
- Field connection remote alarm terminals for each of the following: Pump Operating, Power Available, Phase Reversal and Overcurrent Trip.
- Circuitry for start by remote deluge valve or other fire protection equipment (requires normally closed, open to start remote contacts).
- Circuitry for remote start by push-button or other normally open, closed to start device (requires manual stop at controller).

## Options and Modifications

Refer to the controller Product Description sheet for a list of available Options and Modifications.

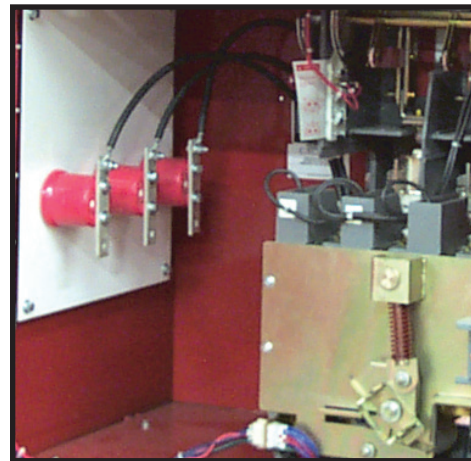

Medium voltage compartment (including vacuum contactor, main fuses, motor connection bus and mechanical emergency run mechanism).

**ASCO** Power Technologies®

111 Corning Road  
Suite 120  
Cary, North Carolina 27518  
P +1 919 460 5200  
F +1 919 460 5250  
www.firetrol.com

While every precaution has been taken to ensure accuracy and completeness herein, ASCO Power Technologies assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications and drawings are subject to change without notice. The ASCO, ASCO Power Services, and ASCO Power Technologies marks are owned by Emerson Electric Co. or its affiliates and utilized herein under license. ©2017. Printed in USA.