

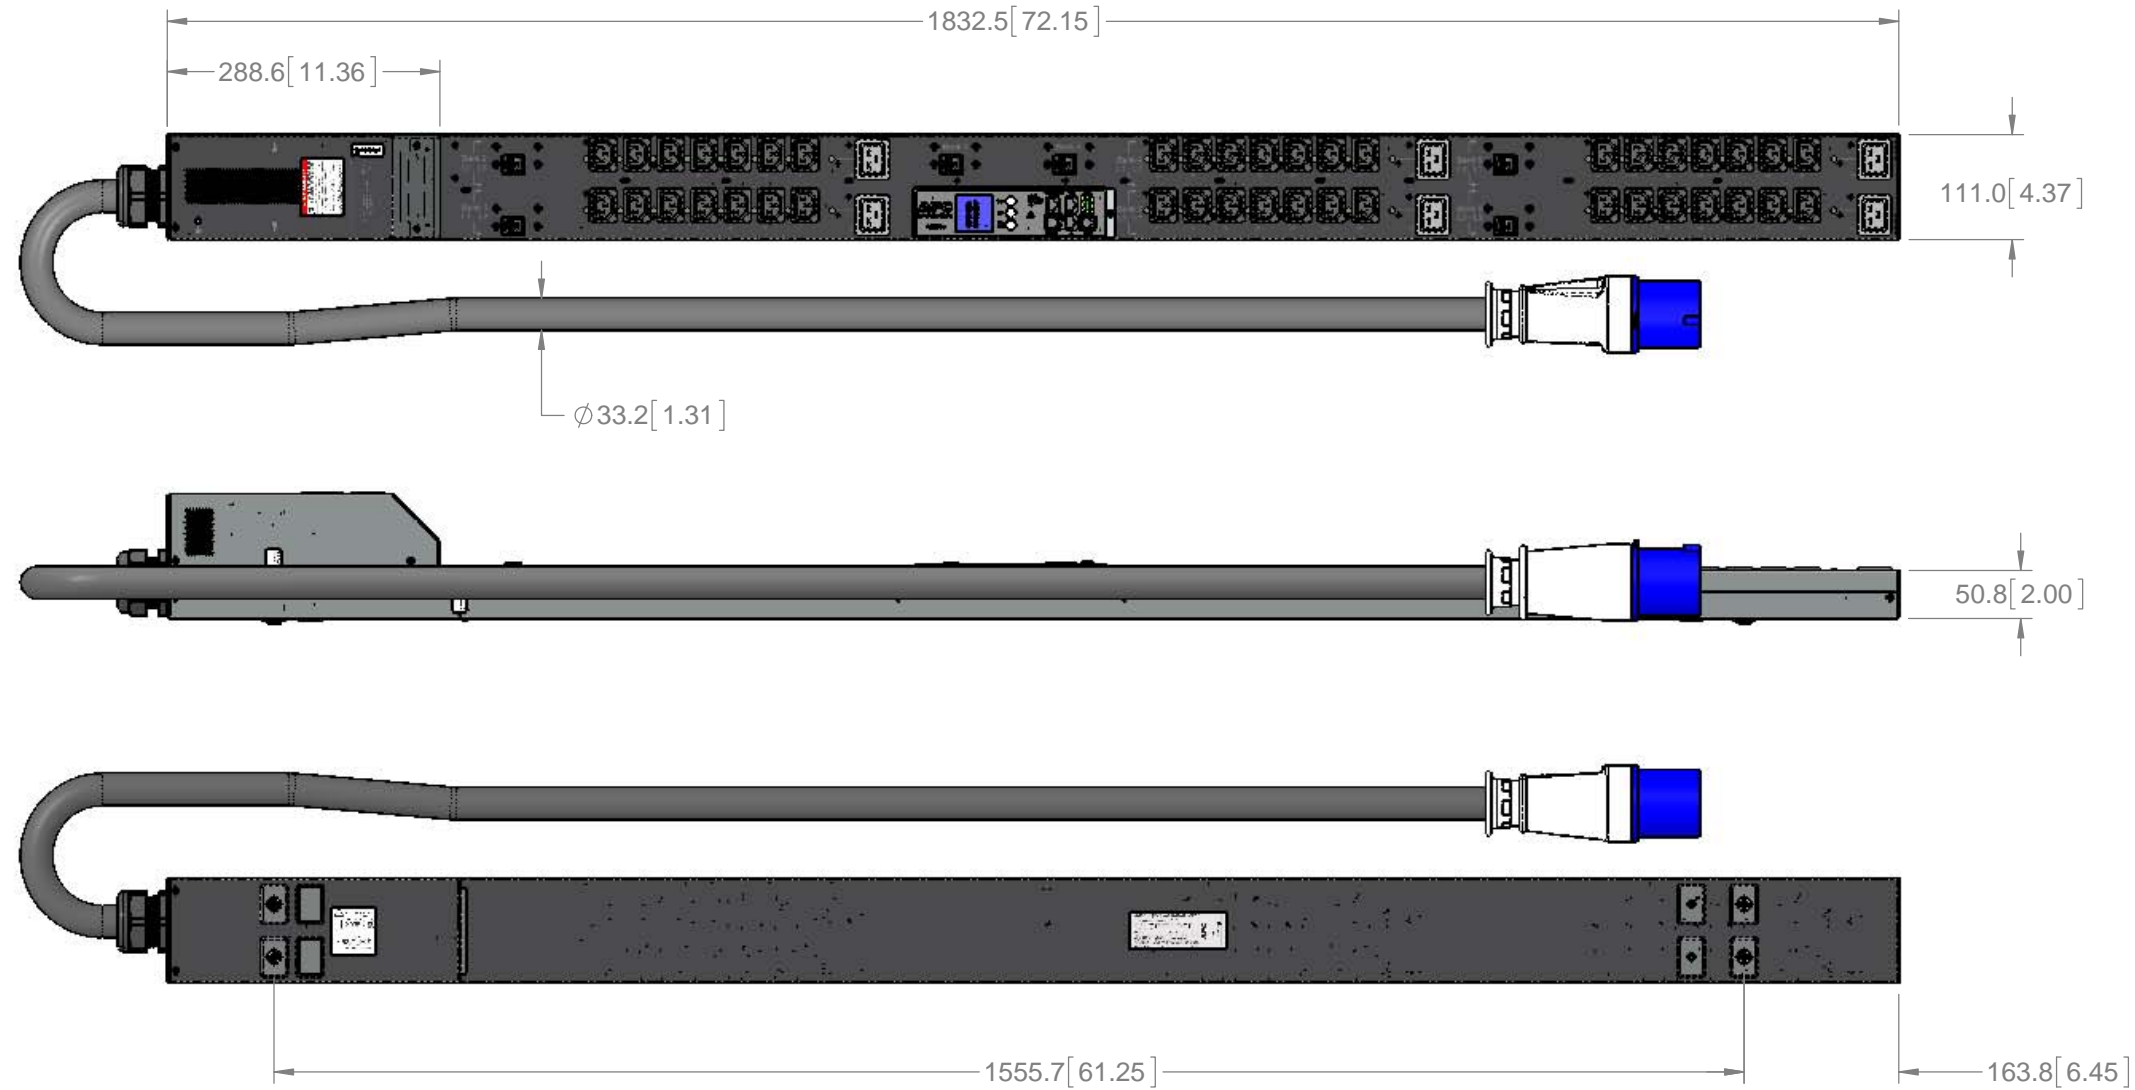
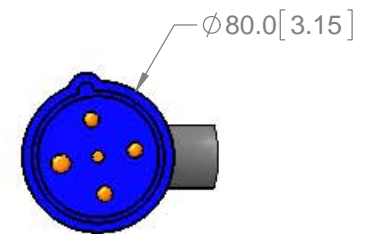


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF SCHNEIDER ELECTRIC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

| REVISIONS | | | | | |
|-----------|--------|-------|----------------------|-----------|-----------|
| REV. | SUFFIX | ECO # | DESCRIPTION | DATE | APPROVED |
| E1 | - | - | RELEASE TO PROTOTYPE | 9/04/2015 | M. FIACCO |

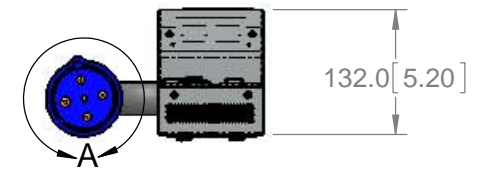

RACK PDU
60A
INPUT: IEC 309-60A 3W+PE
OUTPUT: (42)IEC 320 C13, (6)IEC 320 C19


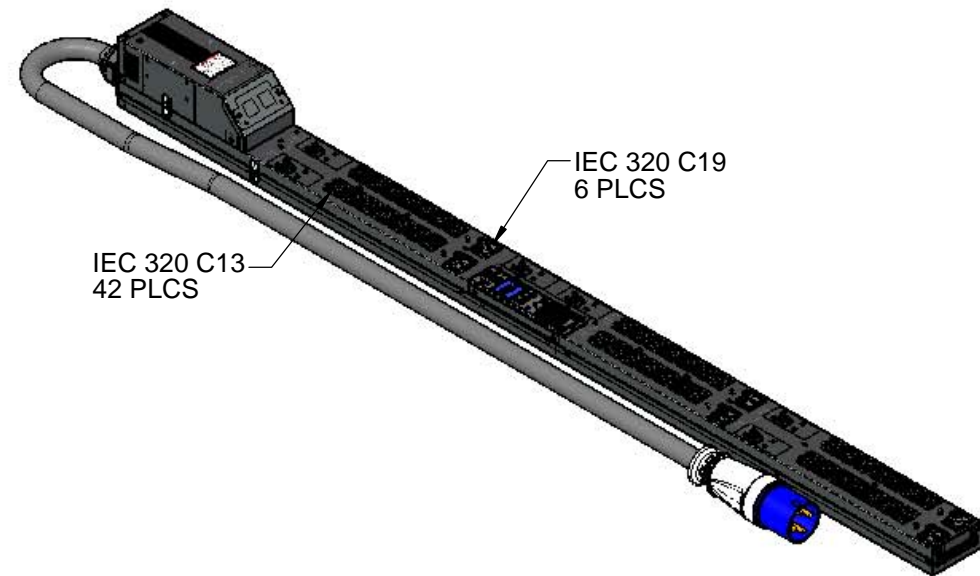


NOTES, UNLESS OTHERWISE SPECIFIED:


1. INSTALLATION SHALL COMPLY WITH APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.
4. NET WEIGHT OF UNIT IS X.XX KG.
5. LENGTH OF THE CORD IS 3.05 METERS.

| | | | | | | |
|---|-------------|------------------------------|-----------------------|-----------|----------------------|--------------------------------|
| UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: | | DRAWN | M. FIACCO | 7/16/2015 | Schneider Electric | RACKS & COOLING ENGINEERING |
| X ± 3 MM | X° ± 1° | ENGINEER | M. FIACCO | 7/16/2015 | | |
| X.X ± 1.5 MM | X.X° ± 0.5° | ITEM WEIGHT (REFERENCE ONLY) | 16.05455606 KG | | PRODUCT | PDU 208V (42) C13 & (6) C19 |
| X.XX ± 0.50 MM | | DRAWING FILE NAME | OG-AP8967_REV1.SLDDWG | | ITEM | NSA |
| OX X ± 0.3 MM | | 3D MODEL FILE NAME | OG-AP8967 | | SIZE | B |
| ØX.XX ± 0.10 MM | | 3D MODEL CONFIGURATION | Default | | DWG. NO. | OG-AP8967 |
| THIRD ANGLE PROJECTION | | | | REV. | E1 | |
| | | | | SCALE 1:8 | DO NOT SCALE DRAWING | INTERPRET PER ASME Y14.5M-1994 |

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF SCHNEIDER ELECTRIC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

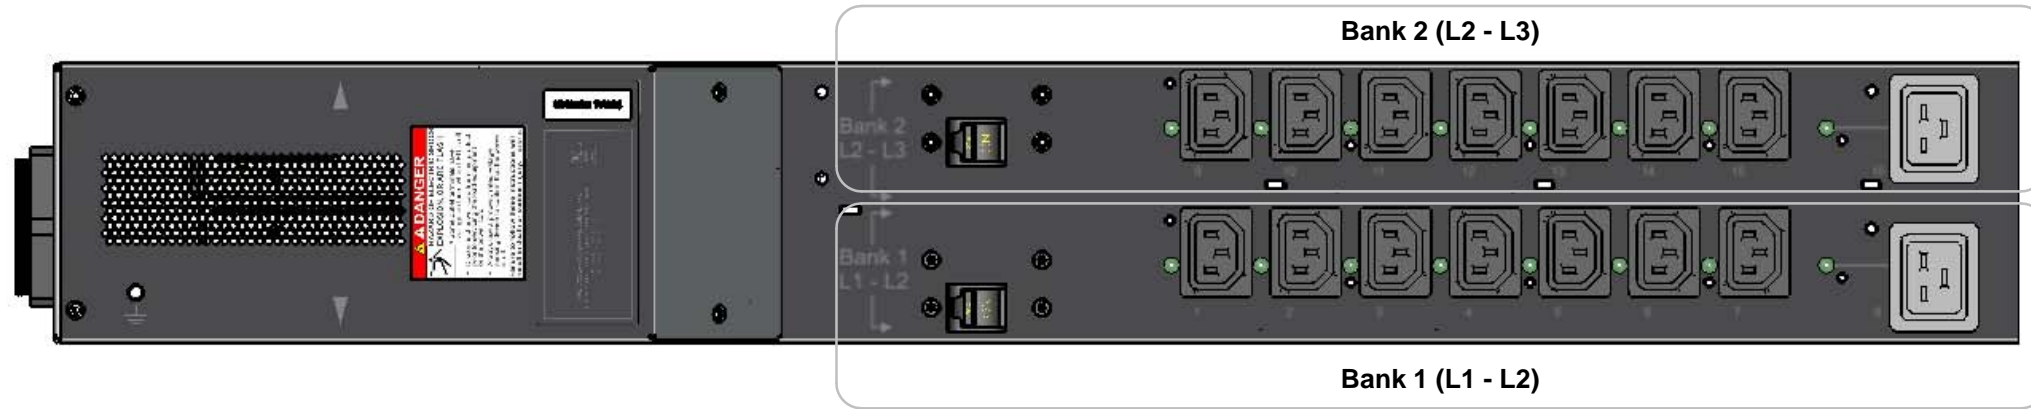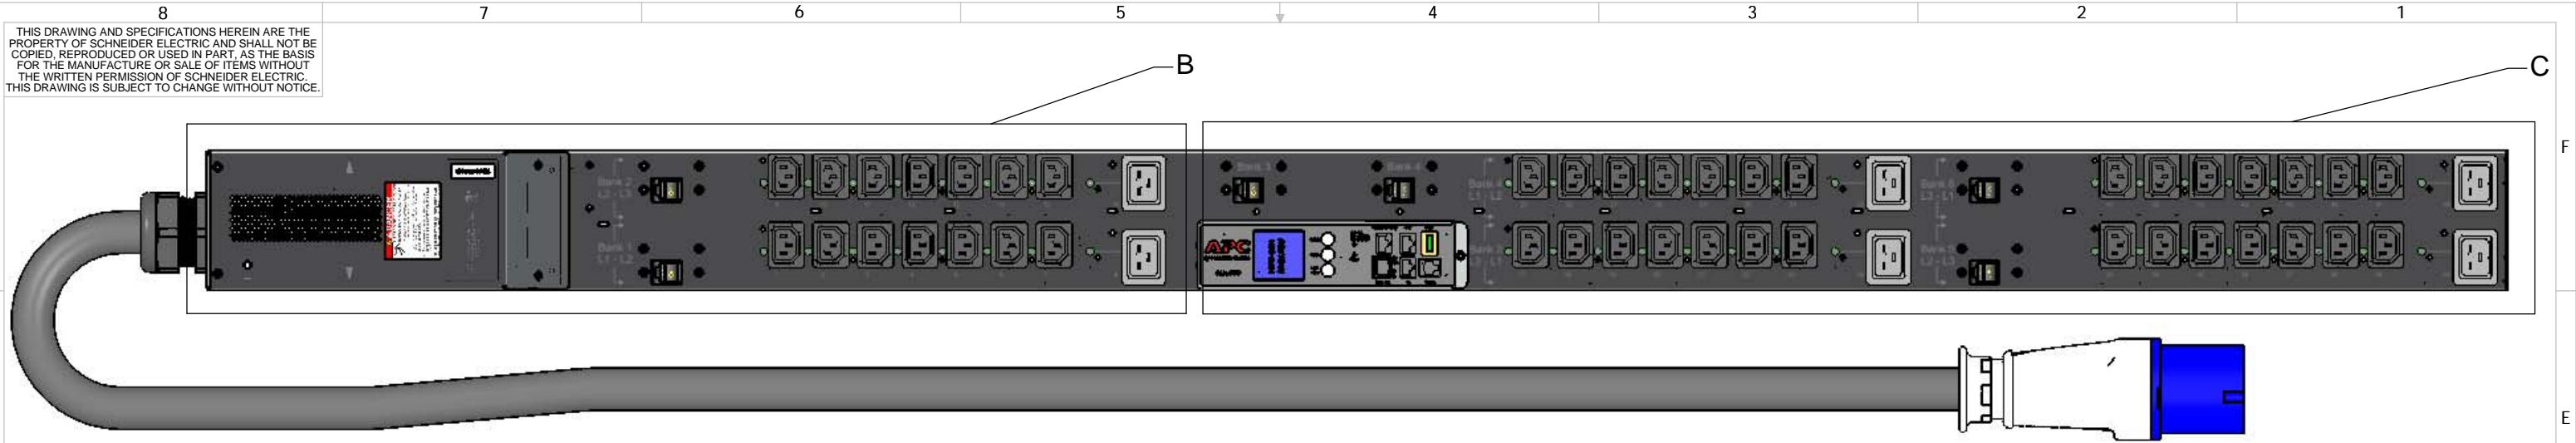

DETAIL B
SCALE 1 : 3

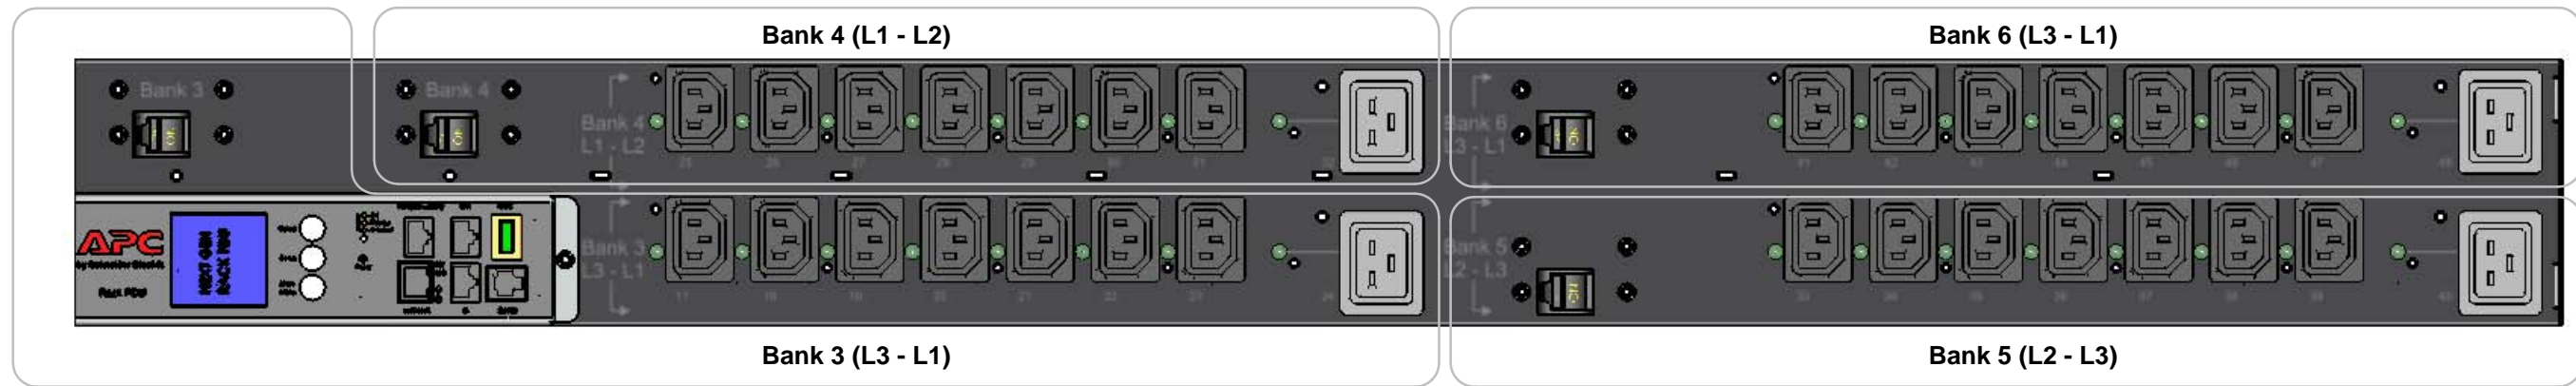

DETAIL C
SCALE 1 : 3

| | | | | |
|--|--|--|--|--------------------------------|
| UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X ± 3 MM X° ± 1° XX ± 1.5 MM XX° ± 0.5° XXX ± 0.50 MM ØX.X ± 0.3 MM ØX.XX ± 0.10 MM | | DRAWN M. FIACCO 7/16/2015 | Schneider Electric | RACKS & COOLING ENGINEERING |
| BRACKETED DIMENSIONS ARE IN INCHES & FOR REFERENCE ONLY THIRD ANGLE PROJECTION | | ENGINEER M. FIACCO 7/16/2015 | | |
| ITEM WEIGHT (REFERENCE ONLY) 16.05455606 KG | | DRAWING FILE NAME OG-AP8967_REV1.SLDDWG | PRODUCT PDU 208V (42) C13 & (6) C19 | REV E1 |
| SCALE 1:3 DO NOT SCALE DRAWING | | 3D MODEL FILE NAME OG-AP8967 | SIZE B | DWG. NO. OG-AP8967 |
| | | 3D MODEL CONFIGURATION Default | NSA | INTERPRET PER ASME Y14.5M 1994 |