


BOTTOM VIEW OF UPS  
(TYPICAL FOR ALL JAPAN SYLX UPS TOWER)

FOOT PRINT

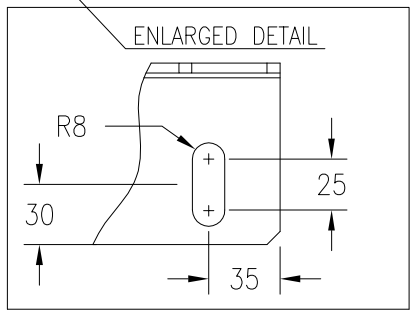

NOTES:

1. REFER TO INSTALLATION GUIDE FOR SIESMIC ANCHORING PROCEDURE.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
- △ 3. THESE DIMENSIONS ARE GIVEN TO THE CENTER OF THE CASTER SWIVEL RADIUS
4. INSTALLATION MUST COMPLY WITH ALL APPLICABLE NATIONAL AND LOCAL CODES.

<p>THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF AMERICAN POWER CONVERSION AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM APC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.</p>		<p>AMERICAN POWER CONVERSION 2-30-4 Nishi-Gotanda Shinagawa-ku, Tokyo</p>	<p>PROJECT <b>SUBMITTAL DRAWING</b></p>		<p>TITLE SYMMETRA LX TOWER 200VAC(2PH+N+G) 50/60Hz INPUT 100/200VAC 50/60Hz OUTPUT SEISMIC ANCHORING DETAILS</p>	
<p>DRAWN K.NAGENDRA 07/12/05</p>	<p>CHECKED M.TAVARES 07/12/05</p>		<p>ENGINEER K.WHITE 07/12/05</p>	<p>SCALE ANGLE PROJECTION</p>	<p>DWG NO SYAJ-TOWER-SA</p>	<p>Sheet No. 1/1</p>