



DETAIL "B"

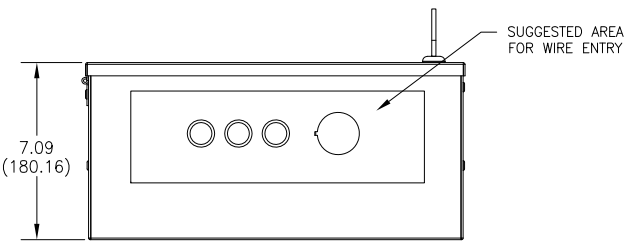

BOTTOM VIEW


COMPONENT AND MOUNTING LOCATIONS

SYNCHRONIZATION MODULE

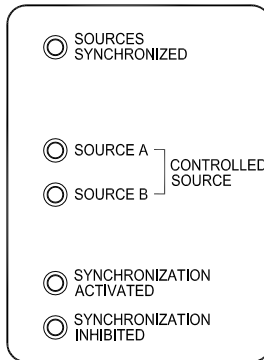

STATUS INDICATORS

DETAIL "A"

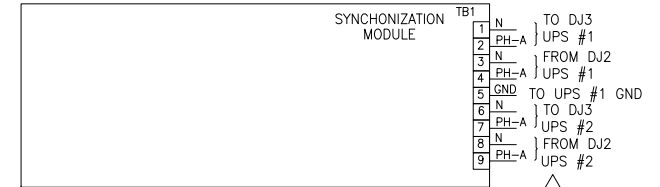

DETAIL "C"

△ 347V APPLICATION ONLY.

5. COLOR: MED GREY.
4. APPROXIMATE WEIGHT: 40 LBS.
3. ALL INTERCONNECT WIRES TO BE #16 AWG STRANDED, 600V TINNED COPPER WIRE, PROVIDED AND CONNECTED BY CUSTOMER. HIGH VOLTAGE SIGNALS SHALL BE IN SEPARATE CONDUITS FROM LOW VOLTAGE SIGNALS.
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE TO THE OUTSIDE EDGE OF ENCLOSURE, EXCLUDING HARDWARE, SWITCH HANDLE LOCKS, KEYS, ETC...
1. ALL DIMENSIONS ARE IN INCHES (MM).

NOTES: UNLESS OTHERWISE SPECIFIED.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: EPS 8000 INSTALLATION DRAWING SYNCHRONIZATION BOX EPS 8000 1125kVA, 600V GENERAL ARRANGEMENT

DWG NO: E8TUPS1125KL-SYNCRBOX
 DRAWN BY: K.NAGENDRA 30-SEP-15
 ENGINEER: AJIT SINGH 30-SEP-15

REV 01
 THIRD ANGLE
 PROJECTION

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 1

APPROVED BY: IRENE KENNEDY 30-SEP-15