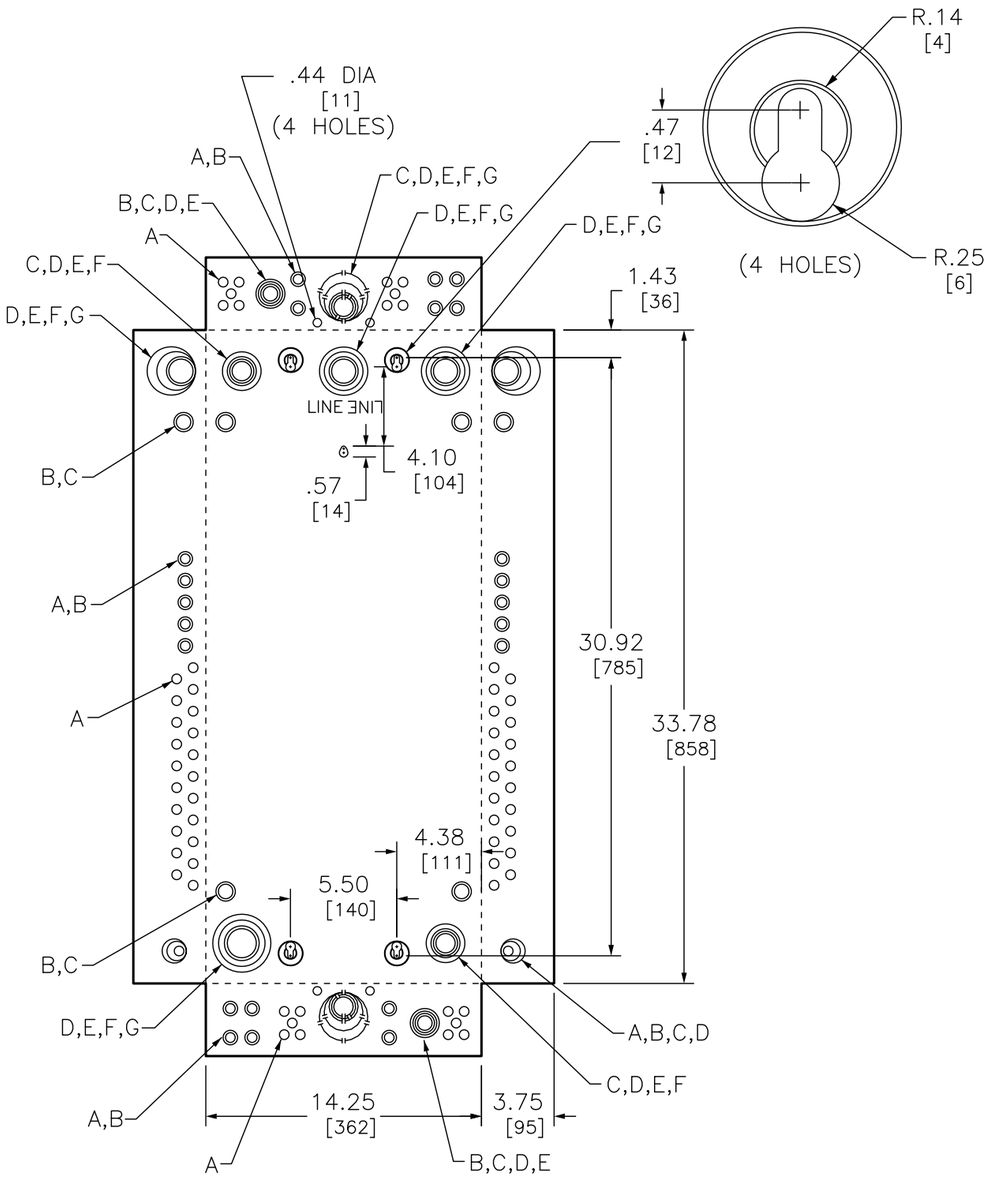

KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

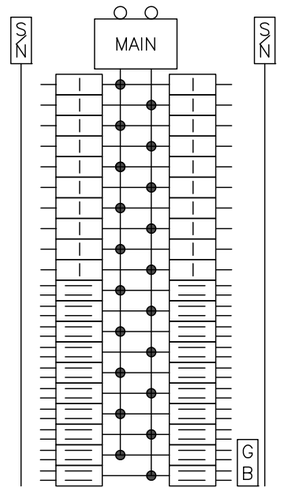

QO140M200PT2

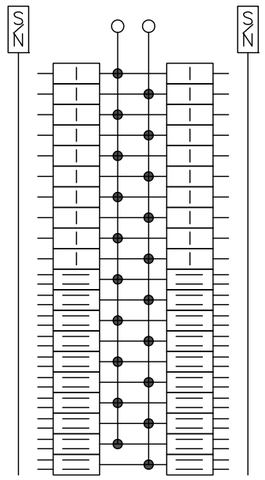

QO140L200PG

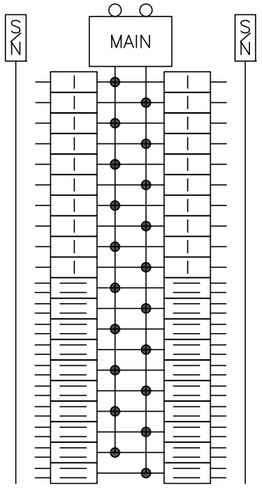

QO140M200P
QO140M200PC

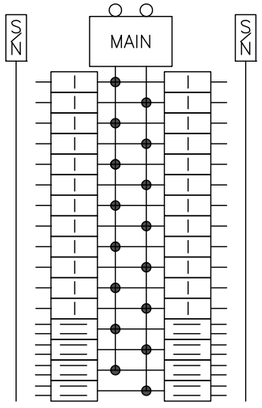

QO132M150P

DUAL DIMENSIONS: INCHES / MILLIMETERS

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAIN AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG AL/CU
QO132M150P	120/240VAC 1Ø 3W	150	32	40	#4–250 CU #4–300 AL
QO140L200PG		200	40	60	
QO140M200P					
QO140M200PC					
QO140M200PT2					

NOTES:
FINISH – GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
UL LISTED – FILE E–6294
NEUTRALS – INSULATED GROUNDABLE.
LOAD CENTERS WITH "G" IN CATALOG NUMBER INCLUDE A FIELD INSTALLABLE EQUIPMENT GROUND BAR KIT.
LOAD CENTERS WITH "P" IN CATALOG NUMBER INCLUDE EXTENDED NEUTRALS FOR PLUG ON NEUTRAL READY INTERIORS.
LOAD CENTERS WITH "T2" IN THE CATALOG NUMBER INCLUDE (2) FACTORY INSTALLED GROUND BARS.
LOAD CENTERS WITH "C" IN CATALOG NUMBER INCLUDE FLUSH/SURFACE MOUNTED COVER.

QO LOAD CENTERS
GENERAL PURPOSE NEMA TYPE 1 ENCLOSURE
INDOOR

SQUARE D™ by Schneider Electric

DWG# NO. PWFDS–SYRS–0205