





KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

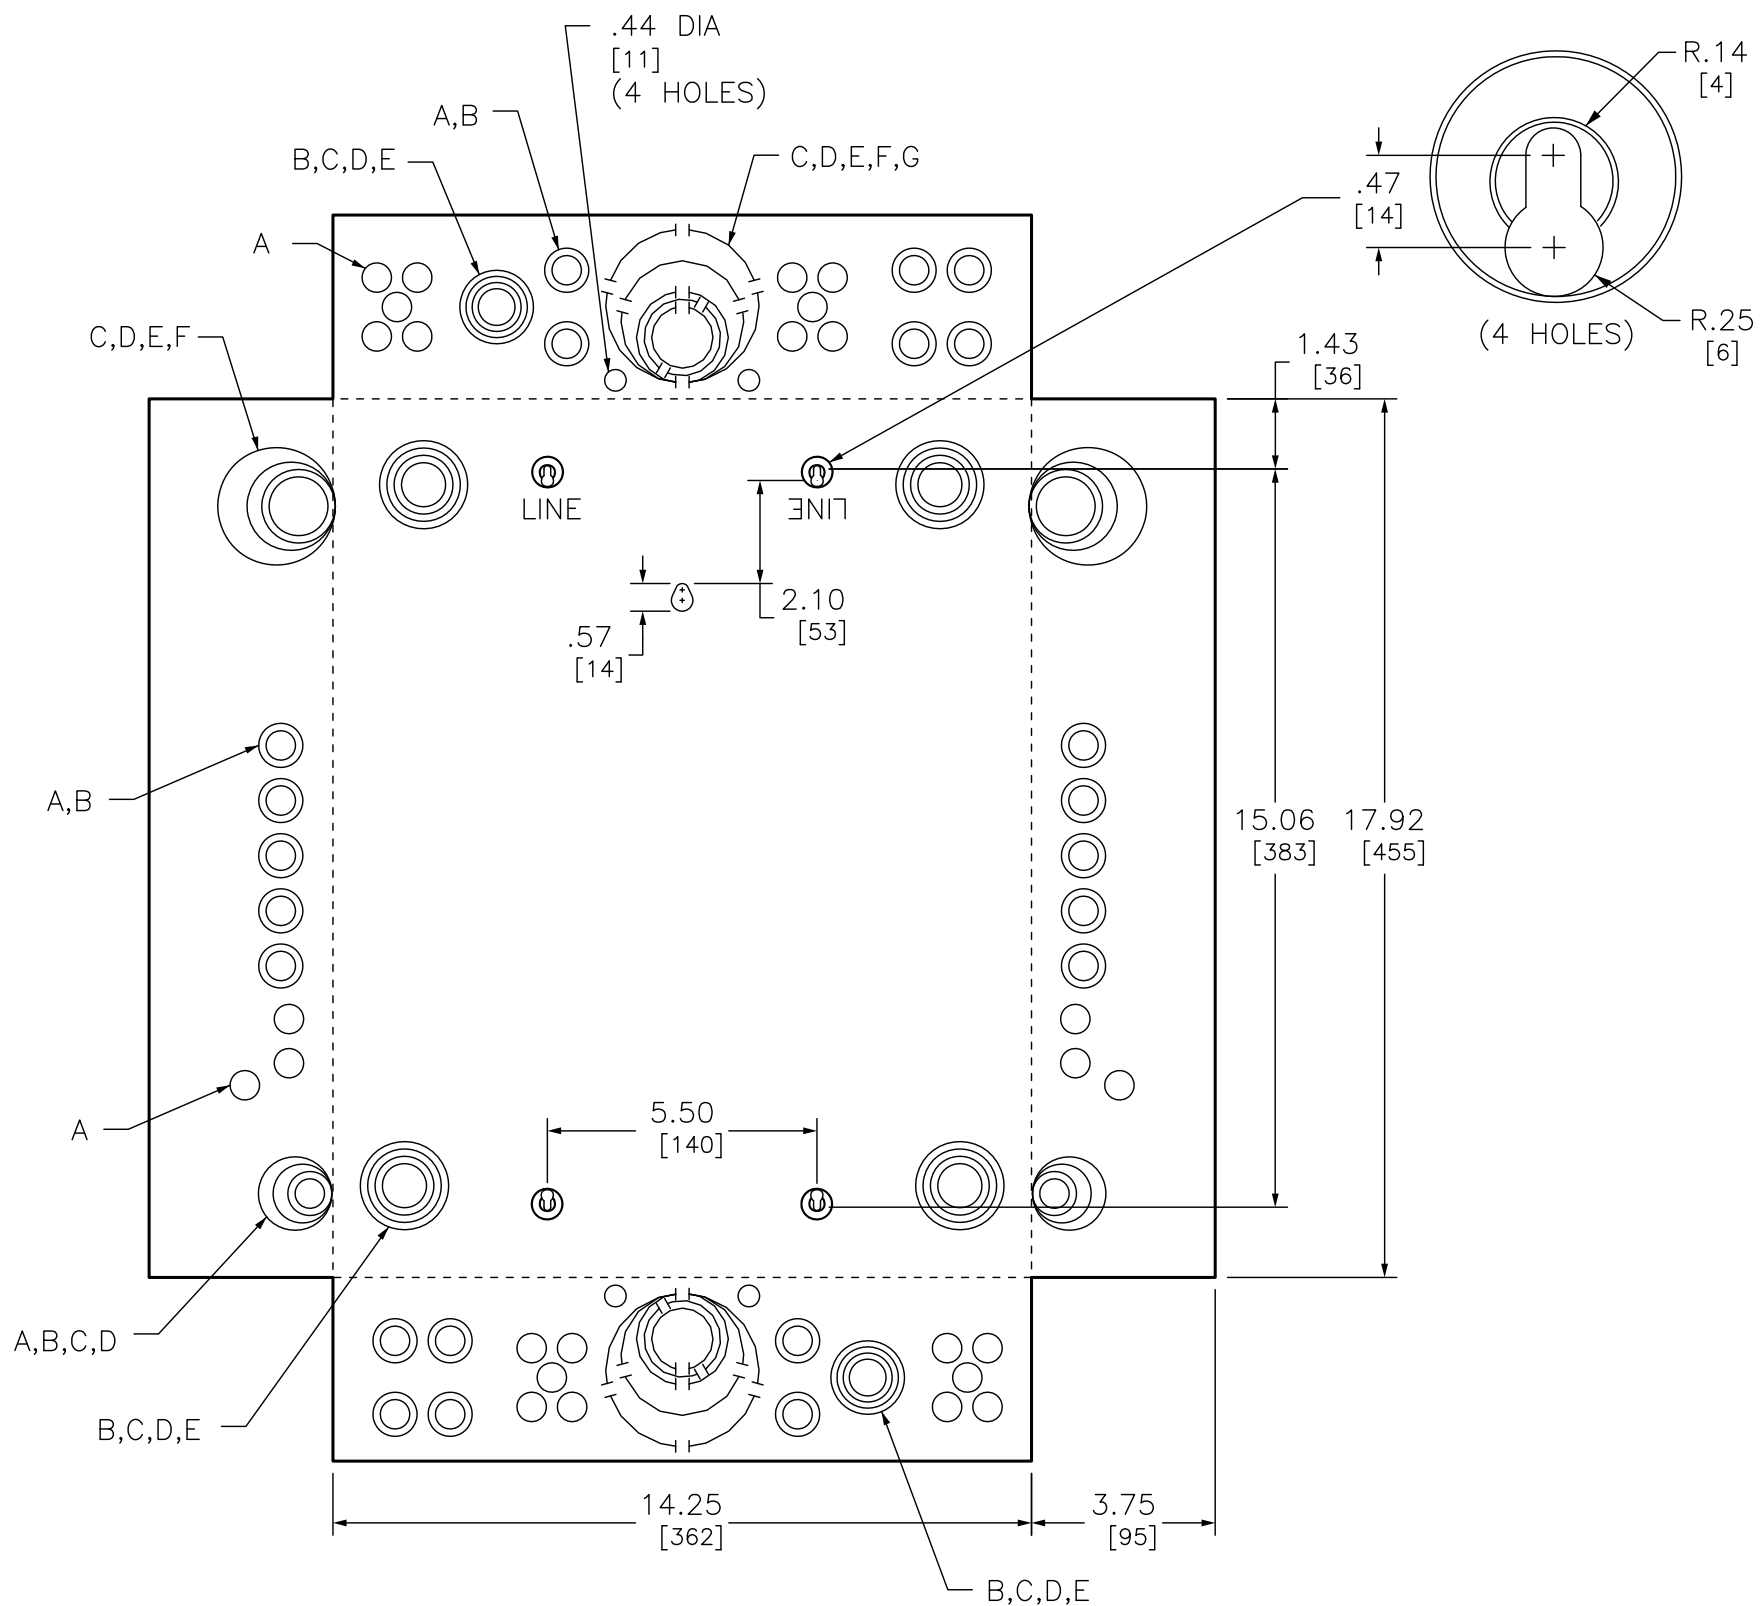


QO112L125PG
QO112L125PGC
QO112L125PWG



QO116M100P
QO116M100PC

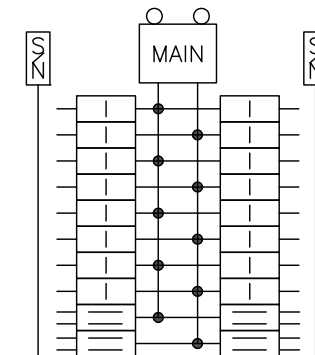

QO120M100P
QO120M100PC



QO120L125PG
QO120L125PGC
QO120L125PWG

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG AL/CU	
QO112L125PG	120/240VAC 1Ø 3W	125	12	24	#6-2/0 CU/AL	
QO112L125PGC						
QO112L125PWG						
QO116M100P			16			#6-#1 CU #6 - 2/0 AL
QO116M100PC						
QO120M100P						
QO120M100PC		20	#6-2/0 CU/AL			
QO120L125PG						
QO120L125PGC						
QO120L125PWG						

NOTES:
 FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
 UL LISTED - FILE E-6294
 NEUTRALS - INSULATED GROUNDABLE.
 LOAD CENTERS WITH "G" IN CATALOG NUMBER INCLUDE A FIELD INSTALLABLE EQUIPMENT GROUND BAR KIT.
 LOAD CENTERS WITH "P" IN CATALOG NUMBER INCLUDE EXTENDED NEUTRALS FOR PLUG ON NEUTRAL READY INTERIORS.
 LOAD CENTERS WITH "C" IN CATALOG NUMBER INCLUDE FLUSH/SURFACE MOUNTED COVER.
 LOAD CENTERS WITH "WG" IN CATALOG NUMBER INCLUDE AN OFFSET INTERIOR.

QO LOAD CENTERS
 GENERAL PURPOSE NEMA TYPE 1 ENCLOSURE
 INDOOR



DWG# PWFDS-SYRS-0207
 NO.