

A

B

C

D

A

B

C

D

**FUNCTIONAL PLATE XPSVC-A0**  
**ENABLING SWITCH MONITORING**  
**SAFETY MODULE XPSVC**

This technical information contained in this document is the exclusive property of Schneider Electric Industries S.A.S and cannot be used or disclosed to third parties of any kind without its written consent. Only those drawings and diagrams permitted after order booking are binding for execution. All devices shown in this diagrams are in open position, drawn out with operating mechanism disassembled and all power sources off.


Les informations techniques contenues dans ce document sont la propriété exclusive de Schneider Electric Industries S.A.S et ne peuvent être utilisées ou divulguées à des tiers quels qu'ils soient sans son accord écrit. Seuls nos engagements pour exécution les plans et schémas remis après enregistrement de la commande. Les appareils représentés sur ce schéma sont en position ouverte, démontés - toutes sources coupées.

00	13/04/2017	Edition originale / First issue	AKKA	O.MEURANT	A.PERRIN														
Ind	Date	Modification / Modification	Nom / Name	Visa	Nom / Name	Visa	Nom / Name	Visa	Archiv.	Code diffusion	Project - No commande	Indice	Folio						
Rev	Date		Dessine / Drawn		Verifie / Checked		Approuve / Approved	Micro-filmed	Distribution code	Project - Order No.	Rev	Sheet							

FUNCTIONAL PLATE  
 XPSVC  
 ENABLING SWITCH MONITORING  
 SAFETY MODULE XPSVC

CELLEAN OFFER

Echelle  
 Scale  
 1/1



Unite / Department



Code diffusion  
 Distribution code

Project - No commande  
 Project - Order No.

**QGH9392903**


Indice  
 Rev  
 00

Folio  
 Sheet  
 001

1	2		3	4	5	6	7	8	9	10
<p>This technical information, contained in this document is the exclusive property of Schneider Electric Industries S.A.S and cannot be used or disclosed to third parties of any kind without its written consent. Only those drawings and diagrams permitted after order booking are binding for execution. All devices shown in this diagrams are in their position. Drawn out with operating mechanism discharged and all power sources off.</p>	<b>Folio</b>	<b>Designation</b>	<b>Indice de modification</b>			<b>Folio</b>	<b>Designation</b>	<b>Indice de modification</b>		
	Sheet	Designation	Revision			Sheet	Designation	Revision		
	001	FRONT PAGE	00							
	002	SUMMARY	00							
	003	FUNCTIONAL PLATE	00							
	004	LAYOUT	00							
	005	WIRE LIST SHEET 001 / 002	00							
	006	WIRE LIST SHEET 002 / 002	00							
007	PART LIST	00								
<p>Les informations techniques contenues dans ce document (y compris les appareils, équipements, Schneider Electric Industries S.A.S) ne peuvent être utilisées ou divulguées à des tiers (y compris les sous-traitants) sans son accord écrit. Seuls ceux autorisés par la commande et les schémas remis après enregistrement de la commande. Les appareils représentés sur ce schéma sont en position ouvert - débranchés - débranchés - toutes sources coupées.</p>										
<p>Archivage Microfilm</p>										
<p>SUMMARY</p>										
<p>CELLEAN OFFER</p>										
<p><b>Schneider Electric</b></p>										
<p>OGH9392903</p>										
<p>Project - No commande</p>										
<p>Project - Order No.</p>										
<p>Indice Rev 00</p>										
<p>Folio Sheet 002</p>										

This technical information is the property of Schneider Electric Industries S.A.S. and cannot be used or disclosed to third parties without its written consent. Only those diagrams and diagrams permitted after order booking are binding for execution. All devices shown in this diagrams are in open position. Drawn out with operating mechanism discharged and all power sources off.

Les informations techniques contenues dans ce document sont la propriété exclusive de Schneider Electric Industries S.A.S. et ne peuvent être utilisées ou divulguées à des tiers sans le consentement écrit de Schneider Electric Industries S.A.S. Seuls ceux des schémas et schémas permis après enregistrement de la commande. Les appareils représentés sur ce schéma sont en position ouverte - débranchés - toutes sources coupées.

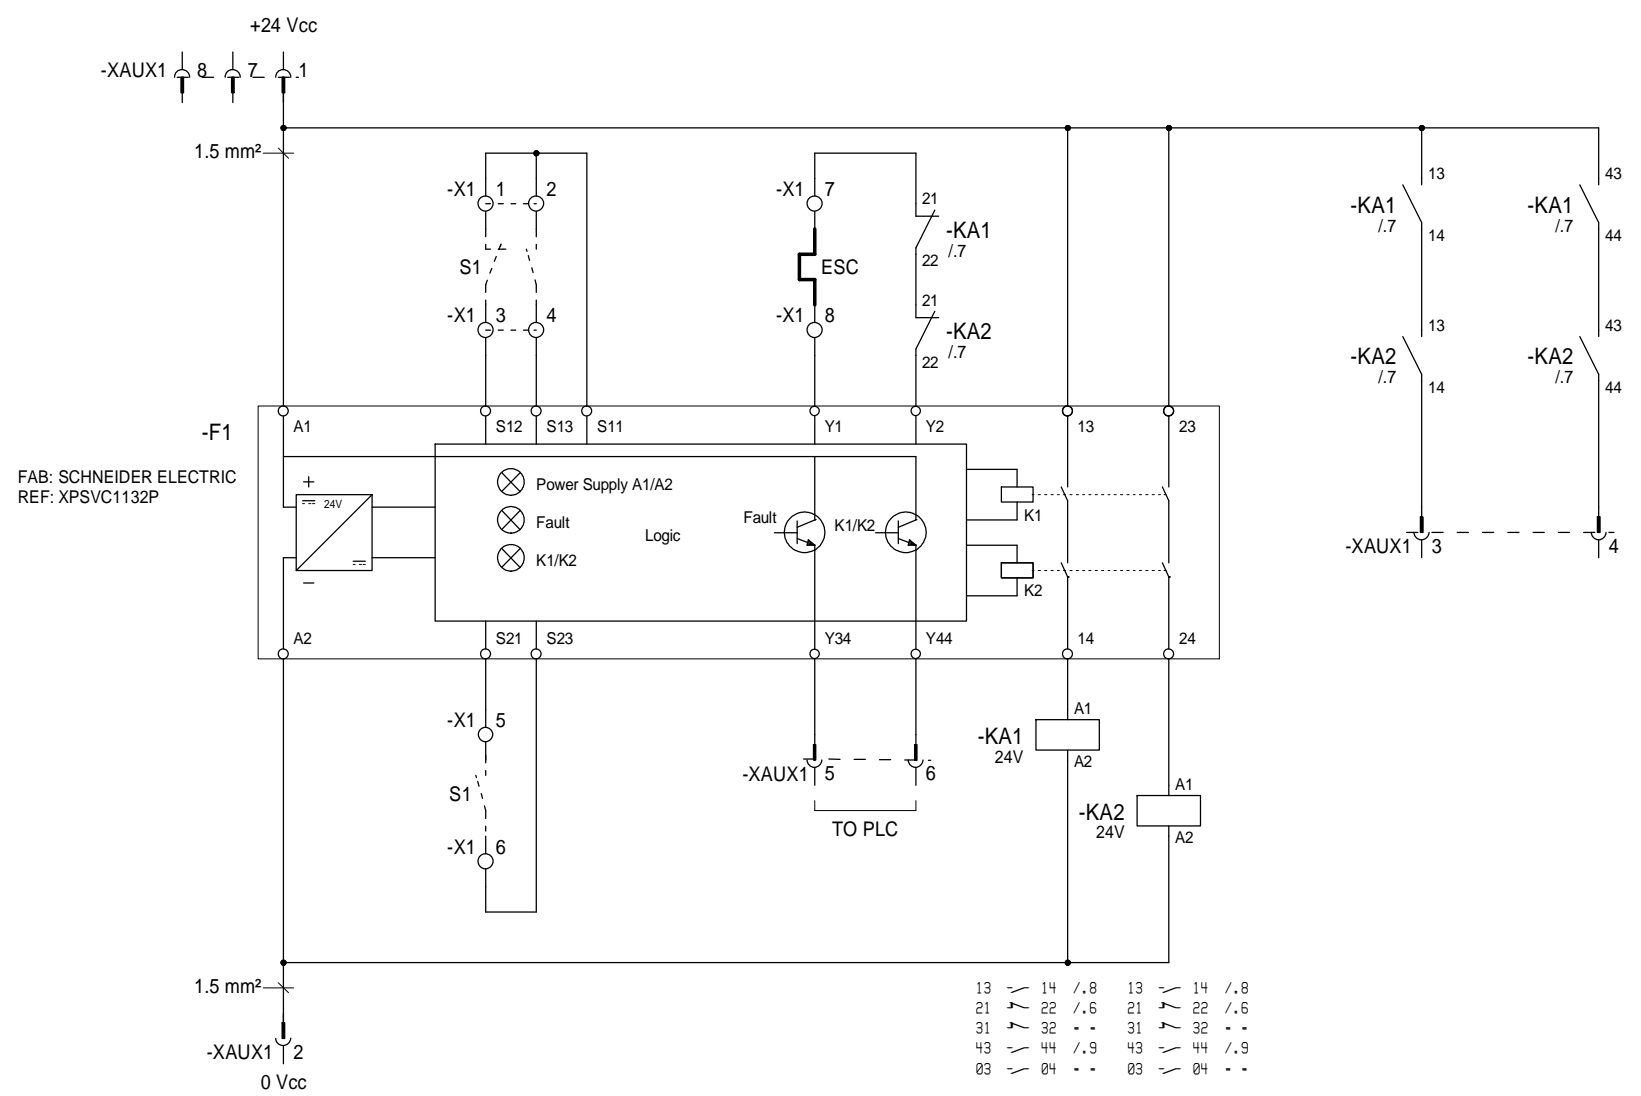

13	↘	14	/,8	13	↘	14	/,8
21	↘	22	/,6	21	↘	22	/,6
31	↘	32	-	31	↘	32	-
43	↘	44	/,9	43	↘	44	/,9
03	↘	04	-	03	↘	04	-

FAB: SCHNEIDER ELECTRIC  
REF: XPSVC1132P

FUNCTIONAL PLATE  
XPSVC  
ENABLING SWITCH MONITORING  
SAFETY MODULE XPSVC

CELLEAN OFFER



OGH9392903  
 Projet - No commande  
 Project - Order No.  
 Indice Rev 00  
 Folio Sheet 003

A

B

C

D

A



B

C


D

This technical information represents the exclusive property of Schneider Electric Industries S.A.S. and cannot be used or disclosed to third parties of any kind without its written consent. Only those drawings and diagrams permitted after order booking are binding for execution. All devices shown in this diagrams are in open position. Drawn out with operating mechanism disassembled and all power sources off.

Les informations techniques contenues dans ce document (y compris les schémas) sont la propriété exclusive de Schneider Electric Industries S.A.S. et ne peuvent être utilisées ou divulguées à des tiers (y compris les sociétés) sans son accord écrit. Seuls ceux autorisés par la commande et les schémas remis après enregistrement de la commande. Les appareils représentés sur ce schéma sont en position ouverte - débranchés - débranchés - toutes sources coupées.

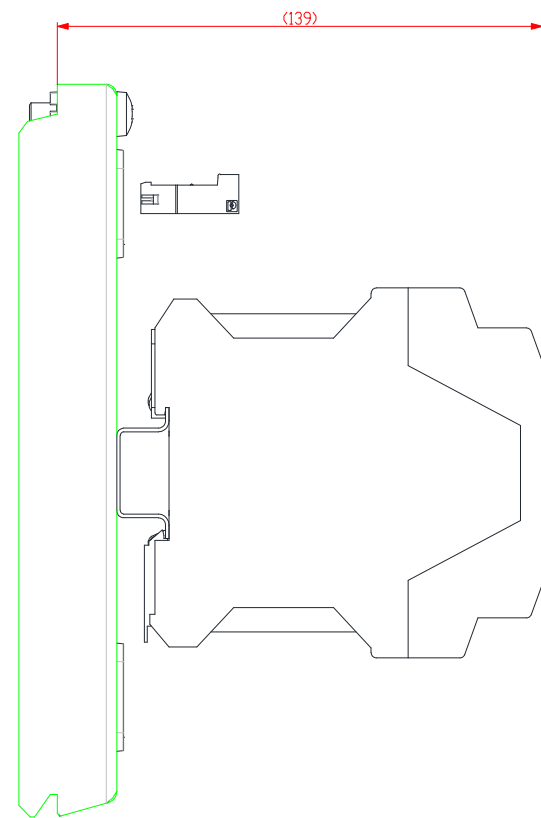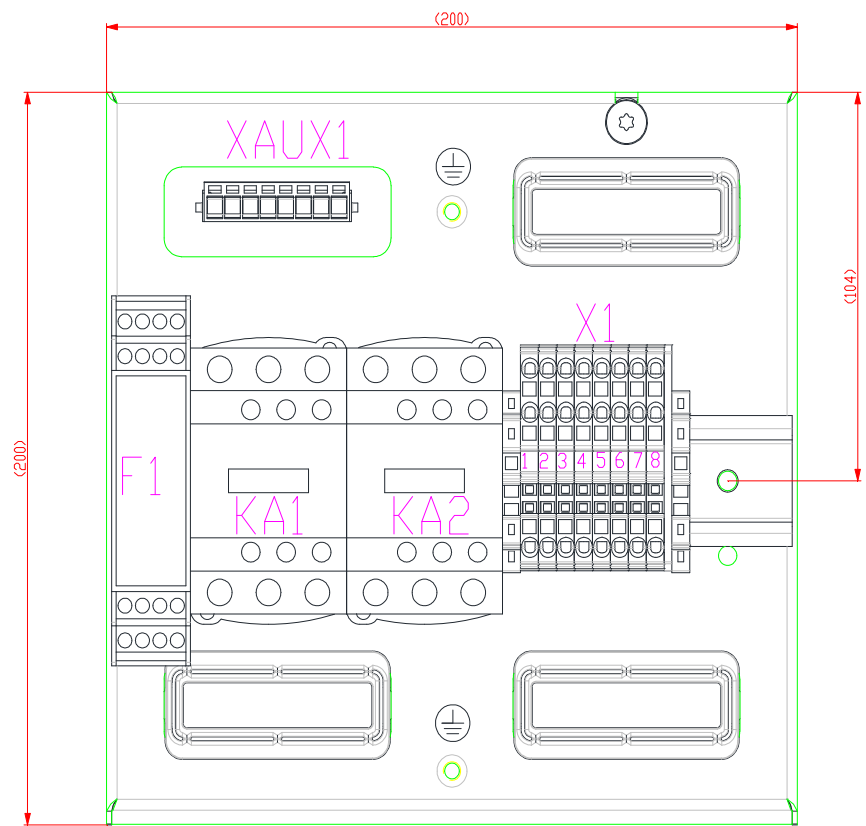

APPROXIMATE WEIGHT : 1500 g



LAYOUT  
XPSVC  
ENABLING SWITCH MONITORING  
SAFETY MODULE XPSVC

CELLEAN OFFER



QGH9392903

Project - No commande  
Project - Order No.

Indice Rev  
00

Folio Sheet  
004

1	2		3		4	5	6	7	8	9		10	
Type of circuit	Electrical Features		Wire Destination		Sheet N°	Designation	Color	Section	Wire Type	Wire routing in cut out	Câble end		
	U (V)	P (W)	From	To							From	To	
AUXILIARY CIRCUIT	24 VDC	2.5 W	XAUX1.1	F1.A1	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K	/	CABLE END INSULATED	CABLE END INSULATED	
			XAUX1.2	F1.A2	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		/	CABLE END INSULATED	CABLE END INSULATED
CONTROL CIRCUIT			F1.A1	F1.13	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K	/	CABLE END INSULATED	CABLE END INSULATED	
			F1.13	F1.23	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		CABLE END INSULATED	CABLE END INSULATED	
			F1.S11	X1.1	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		CABLE END INSULATED	CABLE END INSULATED	
			X1.1	X1.2	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		CABLE END INSULATED	CABLE END INSULATED	
			F1.S12	X1.3	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		CABLE END INSULATED	CABLE END INSULATED	
			F1.S13	X1.4	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		CABLE END INSULATED	CABLE END INSULATED	
			F1.Y1	X1.8	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		CABLE END INSULATED	CABLE END INSULATED	
			X1.7	KA1.21	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		CABLE END INSULATED	CABLE END INSULATED	
			KA1.22	KA2.21	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		ABOTTOM BTOP	CABLE END INSULATED	CABLE END INSULATED
			KA2.22	F1.Y2	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		ABOTTOM BTOP	CABLE END INSULATED	CABLE END INSULATED
			F1.A2	KA1.A2	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		/	CABLE END INSULATED	CABLE END INSULATED
			KA1.A2	KA2.A2	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		/	CABLE END INSULATED	CABLE END INSULATED
			KA1.A1	F1.14	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		BTOP ABOTTOM	CABLE END INSULATED	CABLE END INSULATED
			KA2.A1	F1.24	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		BTOP ABOTTOM	CABLE END INSULATED	CABLE END INSULATED
			F1.S21	X1.5	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		BTOP ABOTTOM	CABLE END INSULATED	CABLE END INSULATED
			F1.S23	X1.6	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		BTOP ABOTTOM	CABLE END INSULATED	CABLE END INSULATED
			F1.23	KA1.13	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		/	CABLE END INSULATED	CABLE END INSULATED
			KA1.13	KA1.43	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		/	CABLE END INSULATED	CABLE END INSULATED
			KA1.14	KA2.13	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		ABOTTOM BTOP	CABLE END INSULATED	CABLE END INSULATED
			KA2.14	XAUX1.3	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K		ABOTTOM BTOP	CABLE END INSULATED	CABLE END INSULATED
KA1.44	KA2.43	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K	ABOTTOM BTOP	CABLE END INSULATED	CABLE END INSULATED				
KA2.44	XAUX1.4	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K	ABOTTOM BTOP	CABLE END INSULATED	CABLE END INSULATED				

This technical information is provided for your reference only. Schneider Electric Industries S.A.S. and cannot be used or disclosed to third parties in any kind without its written consent. Only those drawings and diagrams permitted after order booking are binding for execution. All devices shown in this diagrams are in open position, drawn out with separating mechanism disengaged and all power sources off.

Les informations techniques contenues dans ce document (sauf la portée exclusive de Schneider Electric Industries S.A.S. et ne peuvent être utilisées ou divulguées à des tiers) ou les schémas à des fins autres que celles prévues dans son accord écrit. Seuls nos engagements sur ce schéma sont contraignants. Les appareils représentés sont en position ouverte, débranchés, toutes sources coupées.

WIRE LIST  
XPSVC  
ENABLING SWITCH MONITORING  
SAFETY MODULE XPSVC

CELLEAN OFFER



OGH9392903

Projet - No commande Project - Order No.	Indice Rev 00	Folio Sheet 005
---	---------------------	-----------------------

1	2	3	4	5	6	7	8	9	10			
Type of circuit	Electrical Features		Wire Destination		Sheet N°	Designation	Color	Section	Wire Type	Wire routing in cut out	Câble end	
	U (V)	P (W)	From	To							From	To
CONTROL CIRCUIT			F1.Y34	XAUX1.5	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K	ABOTTOM	CABLE END INSULATED	CABLE END INSULATED
			F1.Y44	XAUX1.6	003	UNIPOLAR INSULATED ELECTRIC CABLE	BLACK	1.5 mm²	H07V-K	ABOTTOM	CABLE END INSULATED	CABLE END INSULATED

This technical information contained in this document is the exclusive property of Schneider Electric Industries S.A.S and cannot be used or disclosed to third parties of any kind without its written consent. Only those drawings and diagrams permitted after order booking are valid for execution. All devices shown in this diagrams are in open position, drawn out with operating mechanism disengaged and all power sources off.

Les informations techniques contenues dans ce document sont la propriété exclusive de Schneider Electric Industries S.A.S et ne peuvent être utilisées ou divulguées à des tiers sans son accord écrit. Seuls ceux autorisés par commande sont valables pour l'exécution. Tous les appareils représentés sont en position ouverte, déconnectés et toutes les sources d'alimentation sont coupées.

WIRE LIST  
XPSVC  
ENABLING SWITCH MONITORING  
SAFETY MODULE XPSVC

CELLEAN OFFER



OGH9392903		
Projet - No commande	Indice	Folio
Project - Order No.	Rev	Sheet
	00	006

This technical information contained in this document is the exclusive property of Schneider Electric Industries S.A.S. It cannot be used or disclosed to third parties in any kind without its written consent. Only those drawings and diagrams permitted after order booking are binding for execution. All devices shown in this diagrams are in open position. Drawn out with operating mechanism disengaged and at power sources off.

TAG	SHEET	DESCRIPTION	MANUFACTURER	MANUFACTURER REF.	QTY
F1	003	MODULE XPSVC - ENABLING SWITCH - 24 V DC	SCHNEIDER ELECTRIC	XPSVC1132P	1
KA1	003	CONTROL RELAY	SCHNEIDER ELECTRIC	CAD32BD	1
KA2	003	CONTROL RELAY	SCHNEIDER ELECTRIC	CAD32BD	1
X1	003	END BRACKET SNAP ON FOR 35 MM DIN RAILS	SCHNEIDER ELECTRIC	NSYTRAAB35	2
X1	003	MARKING FOR TERMINAL BLOK NUMBER 1-10	SCHNEIDER ELECTRIC	NSYTRAB510	1
X1	003	END COVER FOR NSYTRR23-NSYTRR22SC-NSYTRP23 TERMINALS	SCHNEIDER ELECTRIC	NSYTRACR23	1
X1	003	SPRING TERMINAL BLOCK, 2.5mm <sup>2</sup> , 24A, SINGLE-LEVEL 1x2 SPRING, GREY	SCHNEIDER ELECTRIC	NSYTRR23	8
XAUX1	003	MOVING CONNECTOR SINGLE 8P 12A	SCHNEIDER ELECTRIC	LGDC8APM	1
		FUNCTION PLATE H200 x W200 4 WINDOWS VERSION A	SCHNEIDER ELECTRIC	NSYME02024A	1
		DIN RAIL, WIDTH: 35mm, HEIGHT: 15mm, LENGTH: 200mm	-----	DIN RAIL T2	1
		SHUTTER AND CABLE GLAND	SCHNEIDER ELECTRIC	NSYMEWGL	3

A  
B  
C  
D

00	13/04/2017	Edition originale / First issue														
Ind. Rev	Date	Modification /	Modification	Archiv. Micro-fimed	Ind. Rev	Date	Modification /	Modification	Archiv. Micro-fimed							

PART LIST  
XPSVC  
ENABLING SWITCH MONITORING  
SAFETY MODULE XPSVC

CELLEAN OFFER



OGH9392903

Project - No commande Project - Order No.	Indice Rev 00	Folio Sheet 007
--	------------------	--------------------