Product End of Life Instructions

Rack PDU 2G, Metered by Outlet with Switching with Power Cord

Metered-by-outlet with switching Rack PDUs provide real-time remote monitoring of each individual outlet.






A Potential disassembly risks

No specific disassembly risks have been identified for this product

End of Life Instructions

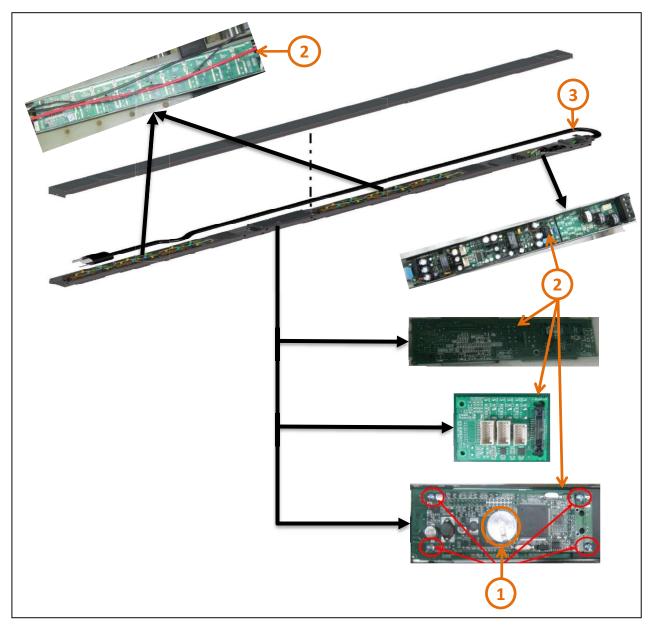

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|----------------------|--------------------------------------|------------------|--------------------------------|
| To be depolluted | 1 | Battery (Lithium metal coil coin) | 3 | 1 x Li-metal coil coin battery |
| To be depolluted | 2 | Electronic Board > 10cm ² | 2500 | 8 x PCBAs |
| To be depolluted | 3 | External Electric Cable | 360 | 1 x Power Cable |

Product description

| Manufacturer identification | Schneider Electric Industries SAS | |
|---------------------------------------|--|--|
| Brand name | APC | |
| Product function | Individual outlet level power metering provides a more granular view of the power distributed to equipment within the enclosure. It also provides the ability to analyze component power trends and perform capacity planning. | |
| Product reference | AP8659 | |
| Additional similar product references | AP86XX Series | |
| Total representative product mass | 6550 g | |
| Representative product dimensions | 1829mm x 56mm x 51mm | |
| Accessories | None | |
| Date of information release | 01/2019 | |

Additional information

| Legal information | and Elec legislation facilities | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | | |
|---|---------------------------------------|--|--|--|
| In case of special transportation: transportation method | None | | | |
| Recyclability potential | 60% | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). | | |

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

© 2018 - Schneider Electric - All rights reserved