

Product End of Life Instructions

APC Smart-UPS RT 6000VA, 220V





Potential disassembly risks

⚠ WARNING


HAZARD OF ARC FLASH OR FIRE

- Disconnect battery terminals before disassembly
- Avoid any electrical connection between the terminals

Failure to follow these instructions can result in death or serious injury.



End of Life Instructions

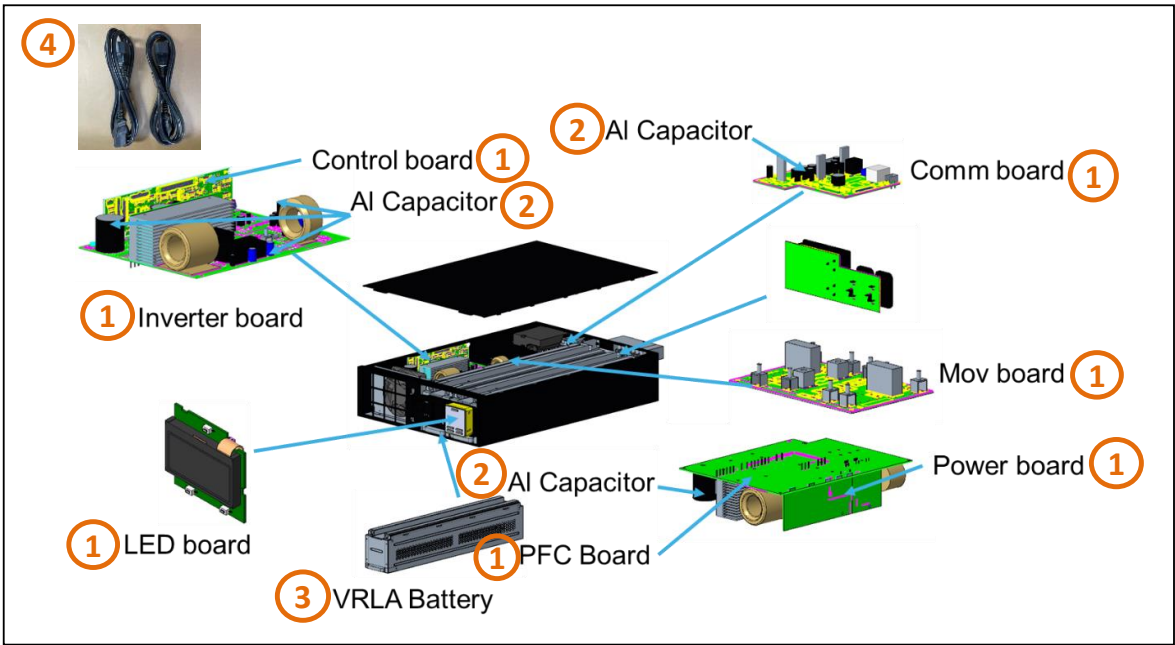

Recommendation	Number on drawing	Component / Material	Weight (g)	Comment
To be depolluted	1	Electronic Board > 10cm ²	4029	8 X PCBs >10cm ²
To be depolluted	2	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	546.3	20 X Electrolyte capacitors
To be depolluted	3	Battery (Lead-acid)	29600	Lead-acid battery
To be depolluted	4	Cable (high current)	1044.8	Cables & Power cord

*Not all batteries, capacitors and PCBAs are pictured here.



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	APC by Schneider Electric
Product function	Smart-UPS™ On-Line provides high-density, true double-conversion online power protection for servers, voice/data networks, medical labs, and light industrial applications.
Product reference	SURT6000XLI-CH
Total representative product mass	52500 g
Representative product dimensions	745.2mm x 438mm x 129.5mm
Date of information release	2023/09/13



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	31%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.schneider-electric.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.se.com

ENVEOLI2304007_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

2023/09/13