
## Product End of Life Instructions Canalis KRC

Canalis KRC from 630 to 6300A



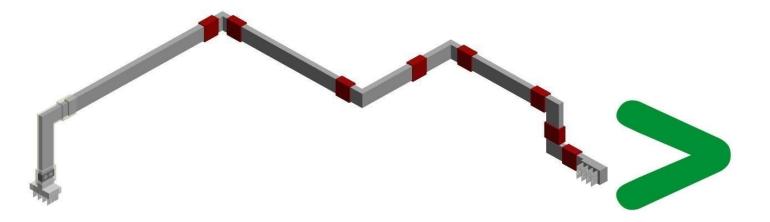


## A Potential disassembly risks

Risks related to moving heavy loads.

When dismantling, parts can fall down.

The use of general safety equipment is recommended (glasses, gloves, helmet, mask, safety shoes, ear gear)

## End of Life Instructions

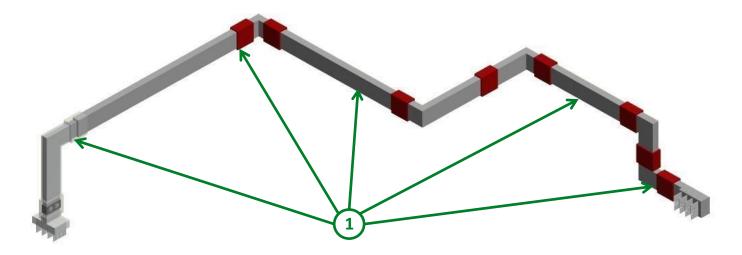

| Recommendation   | Number | Component / Material | Weight (in<br>g) | Comment              |
|------------------|--------|----------------------|------------------|----------------------|
| To be dismantled | 1      | Copper               | 884840           | Moulded in the resin |

| Proc                                      | luct description  |
|---|---|
| Manufacturer identification               | Schneider Electric Industries SAS   |
| Brand name                                | BKS   |
| Product function                          | The Busbar Trunking system is a power distribution system for high power. It provides a safe electrical connection between two electrical devices.  |
| Product reference                         | Busbar Trunking system<br>The representative product used for the analysis is the typical product, KRC 3200A, which consists<br>of:<br>- 1 straight feed unit (cat No. KRC3200ER41)<br>- 3 edgewise elbows (cat No. KRC3200LC4A / KRC3200LC4C)<br>- 3 straight feeder lengths (cat No. KRC3200ET430 / KRC3200ET425 / KRC3200ET420)<br>- 3 flat elbows (cat No. KRC3200LP4C / KRC3200LP4B)<br>- 1 long feed unit (cat No. KRC3200EL41)<br>- 10 junction block (cat No. KRC3200YA4)<br>- 3 casting molds (cat No. KRB0270EM10)<br>- 13 x cast resin material fillers and resin including hardener (cat No. KRB0000RH1 /<br>KRB0000MF1)<br>- 1 demoulding agent (cat No. KRB0000DA1) |
| Additional similar product<br>references  | KRC 630A KRC 800A KRC 1000A KRC 1350A KRC 1600A KRC 1700A KRC 2000A KRC 2500A<br>KRC 3200A KRC 4000A KRC 5000A KRC 6300A  |
| Total representative product mass<br>(kg) | 1911.9  |
| Representative product dimensions<br>(mm) | 6408.5 x 5839 x 1657, vary depending on the assembly of parts   |
| Accessories                               | N/A   |
| Date of information release               | 07/2023   |

| Additional information            |  |   |  |  |
|-----------------------------------|--|---|--|--|
| Eegal information                 | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. Based on "ECO'DEEE recyclability and recoverability |   |  |  |
| Recyclability potential           | 46%  | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |  |  |
| Schneider Electric Industries SAS |  | Energy Management: ADEME).  |  |  |

Country Customer Care Center

## http://www.se.com/contact 35, rue Joseph Monier

CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 928 298 512 € www.se.com

ENVEOLI2307012\_V1

Published by Schneider Electric

 $\ensuremath{\textcircled{O}}$  2016 - Schneider Electric – All rights reserved