

Product End of Life Instructions

VPS VOLTAGE POWER SUPPLY MODULE MICROLOGIC X





Potential disassembly risks

⚠ WARNING


HAZARD OF PARTS EJECTION OR HAND CRUSHING

- Trip the circuit breaker up to discharged state before disassembly.
- Observe instructions to disassemble the spring(s).

Failure to follow these instructions can result in death or serious injury.



End of Life Instructions

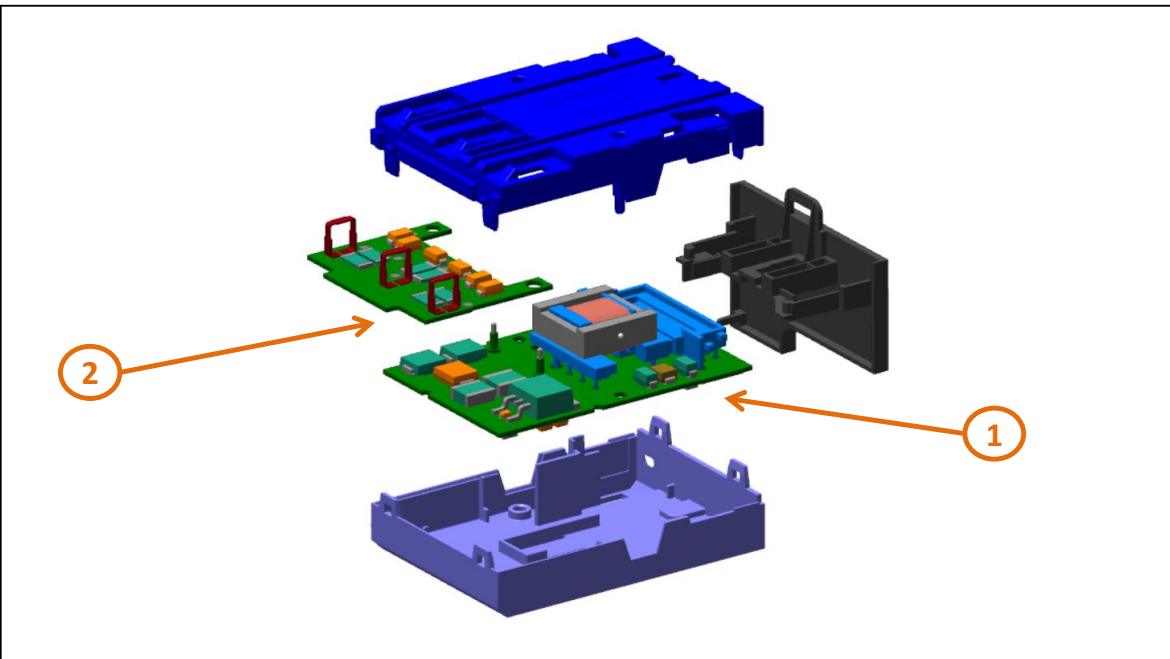

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm ²	8.3625	VPS 3 PHASES 3 WIRES : INPUT BOARD PCBA (HRB73366)
To be depolluted	2	Electronic Board (Communication) > 10cm ²	46.5763	VPS 3 PHASES : OUTPUT BOARD PCBA (NHA20682)



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	<p>When the current is below 20 % of the rated current providing presence of three-phase or two-phase voltage downstream of the circuit breaker (circuit breaker closed), the VPS module ensures the operation and performance of MicroLogic X.</p> <p>The input voltage of the VPS module is limited to 600 V. Above 600 V it shall be supplied from an external voltage by means of the PTE option and voltage transformers. Presence of 24 V on VPS output is signaled by a green LED on the front face of the module.</p>
Product reference	LV850060
Total representative product mass	71.8658 g
Representative product dimensions	22mm x 45mm x 65mm
Accessories	No
Date of information release	11/2023



Additional information

Legal information	<p>This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.</p>	
In case of special transportation: transportation method	No	
Recyclability potential	1%	<p>Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).</p>

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.se.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92500 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 928 298 512 €

www.se.com

ENVEOLI2307033_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

11/2023