
Product End of Life Instructions

Rotary Handle for Compact NSX 100A to 630A



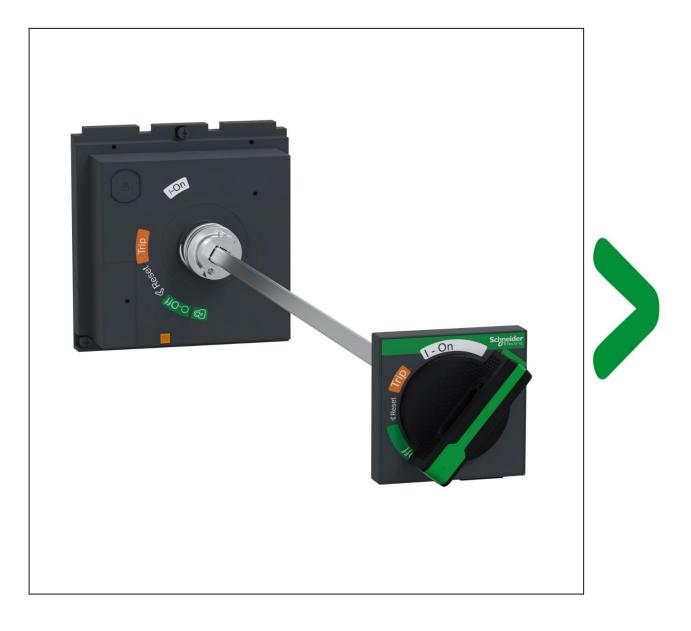

🛕 Potential disassembly risks

Hazard of Parts Ejection or Hand Crushing


Switch OFF / Trip the circuit breaker before disassembly.

Observe instructions to disassemble the spring(s).

Failure to follow these instructions can result in serious injury.

There are several steps to process the products at the End of Life so as to recover components, materials or energy **Reuse --> Depollution --> Dismantling --> Shredding**

End of Life Instructions

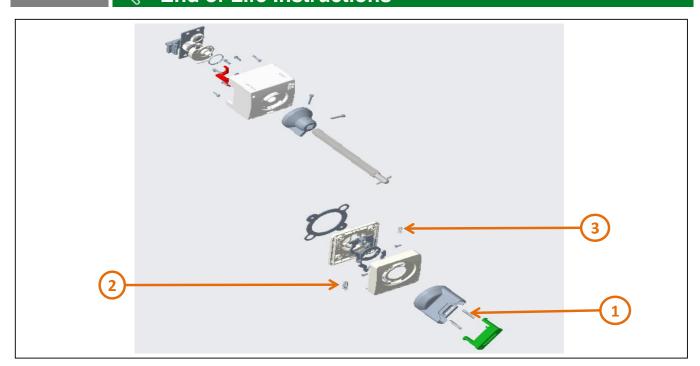

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|-------------------|----------------------|---------------------------------|------------------|---------|
| Potential hazards | 1 | Extended Knob Spring | 4.3 | |
| Potential hazards | 2 | Interlock Spring | 0.2 | |
| Potential hazards | 3 | Slider Sheet Restoration Spring | 0.08 | |

Product description

| Manufacturer identification | Schneider Electric Industries SAS | | |
|---------------------------------------|--|--|--|
| Brand name | Schneider Electric | | |
| Product function | The main function of the Rotary Handle for ComPacT NSX 100A - 630A is to enable Switching ON, Switching OFF, Trip and RESET operation of the MCCB from outside of the panel. In addition to basic functions, it provides safety interlocking feature like panel door interlock, panel door sensor and provision to padlock the MCCB via Rotary Handle. This Range Consists of: | | |
| | ComPacT new generation (ComPacT NSX400 new generation) ComPacT new generation (ComPacT NSX630 new generation) | | |
| Product reference | LV432598T | | |
| Additional similar product references | eferences LV426930T LV426931T LV426932T LV426933T LV426934T LV426935T LV426936T LV426997T LV426998T LV426999T LV429337T LV429338T LV429339T LV429340T LV429341T LV429342T LV429343T LV429343T LV432597T LV432599T LV432600T LV432602T LV432603T LV432606T | | |
| Total representative product mass | 693 g | | |
| Representative product dimensions | 100mm x 485mm x 160mm | | |
| Accessories | No | | |
| Date of information release | 08/2023 | | |

G Additional information

| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | | |
|--|--|---|--|
| In case of special transportation: transportation method | Νο | | |
| Recyclability potential | 65% | Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability). | |
| Country Customer Care Center http://www.se.com/contact 35, rue Joseph Monier CS 30323 F- 92500 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 € | | | |

www.se.com

ENVEOLI2204005_V1

Published by Schneider Electric © 2023 - Schneider Electric – All rights reserved

08/2023