

Product End of Life Instructions


BLOKSET



Marketing Model

The End of Life Instruction (EOLI) covers the entire range of Blokset low voltage switchboard upto 6200A. The switchboards configuration can be different depending on the customer's needs. But some products inside are recommended to be treated separately. The components of the products that optimize the recycling performances are listed, identified and located hereunder.

End of Life Instructions

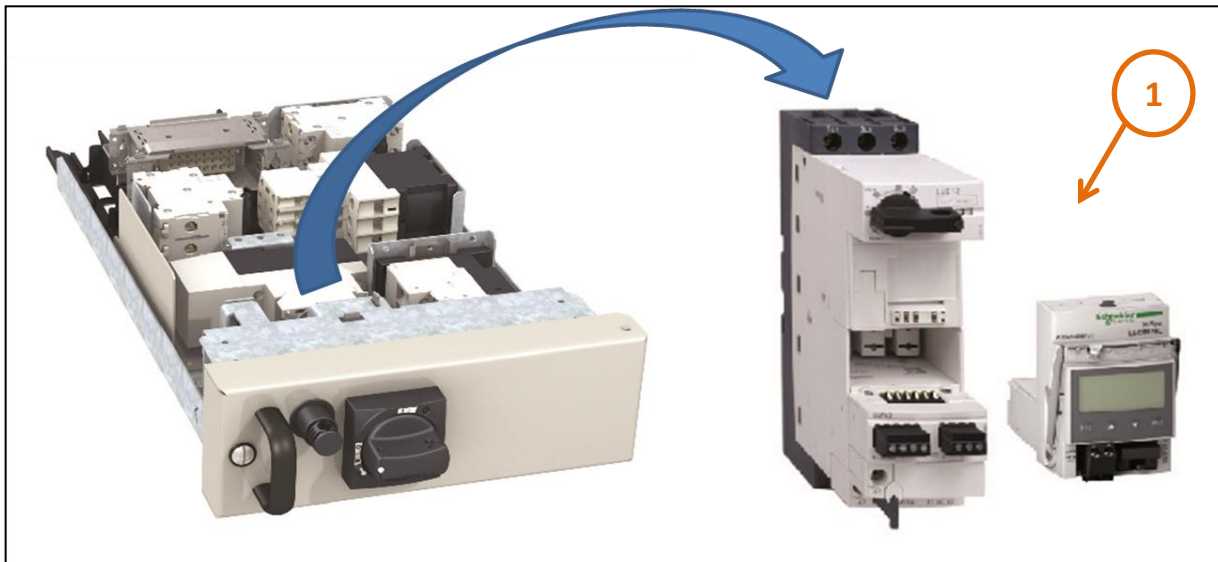

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Tesys Relays - Commercial Reference of LUB*** Series Intelligent motor protection relays	250g	Contains a PCB & LCD. CR changes for different configurations. Equipment may consist more than one relay

Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	BLOKSET is an assembled enclosures with busbars. It is designed to integrate and allow the installation of electric devices such as Circuit breakers (ACB, MCCB & MCB), Switch disconnectors, Fuse, Busbars for connection as per the customer requirement for a maximum current value of up to rated maximum current 6200A/3500A (Horizontal/Vertical).
Total representative product mass in Grams	1678476 g
Representative product dimensions	2400mm X 2375mm X 1200mm
Accessories	Blokset low voltage switchboard also contains other Schneider Electric products sold separately. In order to find their End of Life Instructions, please refer to Schneider Electric website
Date of information release	03/2021



Additional information

Legal information

This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Recyclability potential

84%

Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS
 Country Customer Care Center
<http://www.schneider-electric.com/contact>
 35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1403008

Published by Schneider Electric

© 2021 - Schneider Electric – All rights reserved

03/2021