

# Product End-of-Life Instructions


## Twido Programmable Controller

### Product Range

Twido Programmable Controller

### Marketing Model

TWDLCAE40DRF, TWDLCAA40DRF, TWDLCD40DRF, TWLDCDE40DRF

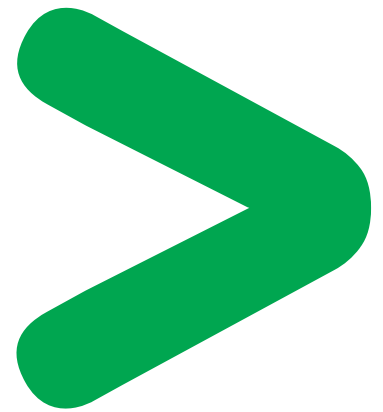

### Size in mm:

H x L x D : 182 x 120 x 102

### Weight in g:

625



**Schneider**  
Electric


## Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇒ Separation for special treatment ⇒ Other Dismantling ⇒ Shredding

**CAUTION:** Risk of electric shock due to electrical components containing energy: capacitors

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

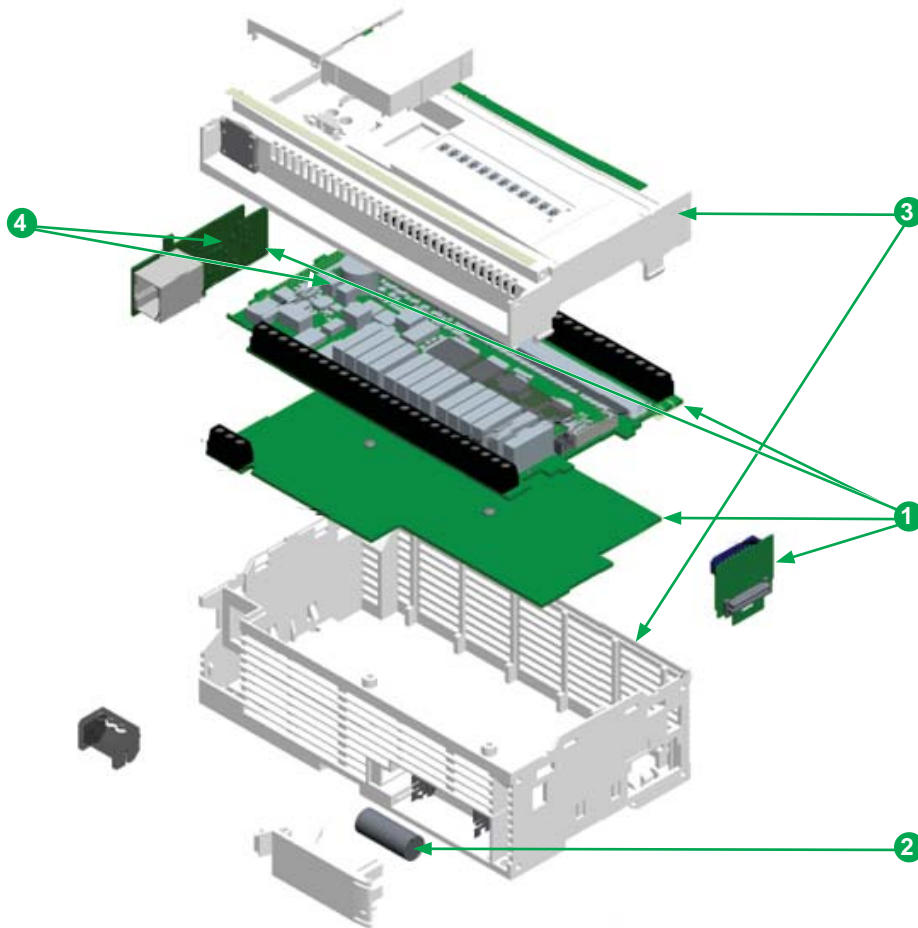

Recommendation	Number on drawing	Components	Weight (g)	Comment
Depollution	1	PCBAs	344	–
	2	Battery	1	–
	4	Electrolytic Capacitor	54.28	Electrolytic Capacitor in Power PCBA
Dismantling	3	Plastic parts	146.1	PC FR

**Schneider Electric Industries SAS**

35, rue Joseph Monier  
CS30323  
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439  
Capital social 896 313 776 €  
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V6.

Publication : Schneider Electric