

# Product End-of-Life Instructions

**Product Range:** Two Position, Oil-Submerged Actuators

**Marketing Model/Name:**



Lexium 05  
Commercial Referenc

## **Purpose:**

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

## **Note :**

This product family is in the scope of EU directive 2002/96/EC, Waste Electrical and Electronic Equipment (WEEE). This is a fixed application.

## **Two-Position, Oil-Submerged Actuators**



## **Product Size in mm:**

H x L x D in mm: **146 x 136 x 167**

## **Weight in g:**

Between **3700** and **4300**


## Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy : Reuse → Separation for special treatment → Other dismantling → Shredding.

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

This MA-418 series contains actuator fluid which should be drained completely during the end of life treatment process.

**BEFORE SERVICING, REMOVE ALL POWER, WAIT 15 MINUTES.**

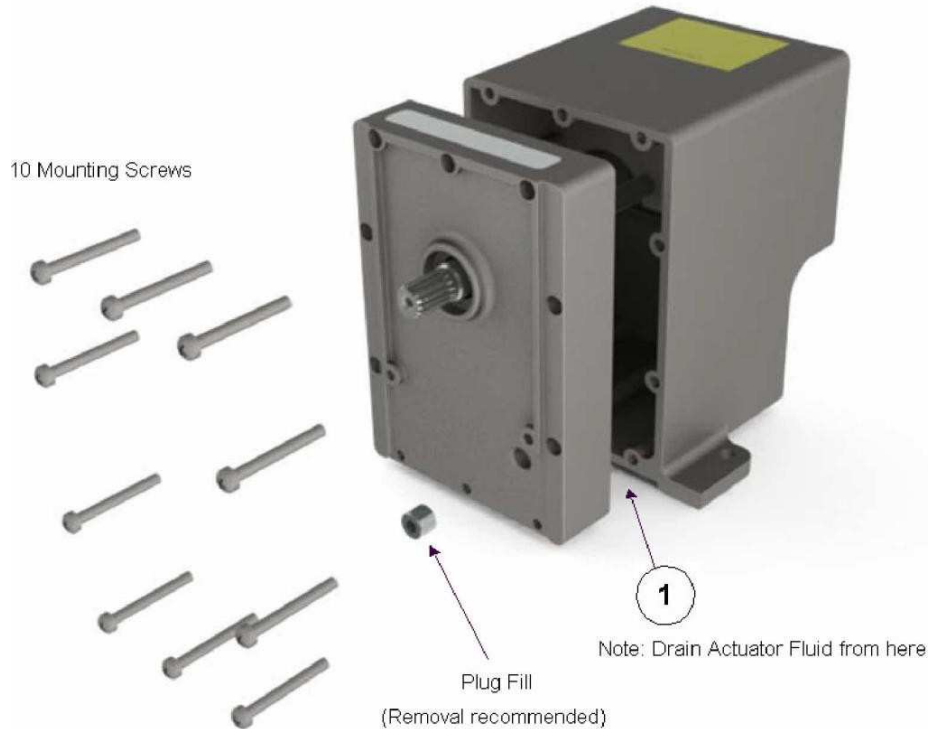

Recommendation	Number on drawing	Components	Weight (g)	Comment
Operating hazards				
Reuse	None	None		
Special treatment	1	Actuator Fluid 3	652	MSDS upon Request: Ester oil, Mineral oil, Zinc phosphate, Lithium soap

**Schneider Electric SA**  
43-45, boulevard Franklin Roosevelt  
F-92500 Rueil-Malmaison Cedex (France)  
Tel.: +33 (0) 1 41 29 70 00  
www.schneider-electric.com

The version of the Guide used to create the document: End of Life  
Instruction Drafting Guide of Schneider Electric version V3

ENVEOLI120809EN

Publication date : 01/22/12