

Product End-of-Life Instructions


Phaseo

Product Range

Regulated switch mode power supplies

Marketing Model

ASI ABLB3002, ASI ABLB3004, ASI ABLD3002, ASI ABLD3004, ASI ABLM3024

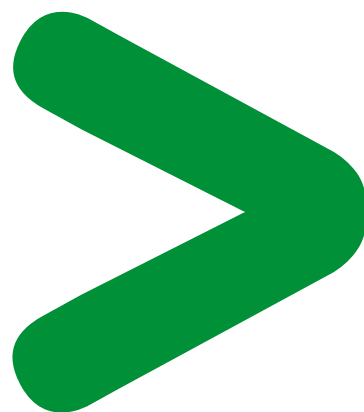

Size in mm (H x L x D):

120 x 120 x 54 for ASI ABLB3002
120 x 120 x 81 for ASI ABLB3004

120 x 120 x 54 for ASI ABLD3002
120 x 120 x 81 for ASI ABLD3004

120 x 120 x 81 for ASI ABLM3024

Weight (excluding packaging) in g:

800 for ASI ABLB3002
1300 for ASI ABLB3004

800 for ASI ABLD3002
1300 for ASI ABLD3004

1300 for ASI ABLM3024




Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇒ **Separation for special treatment** ⇒ **Other dismantling** ⇒ **Shredding**

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

These products contain below printed circuit boards (PCBs), which are recommended to be treated separately during the End of Life operations.

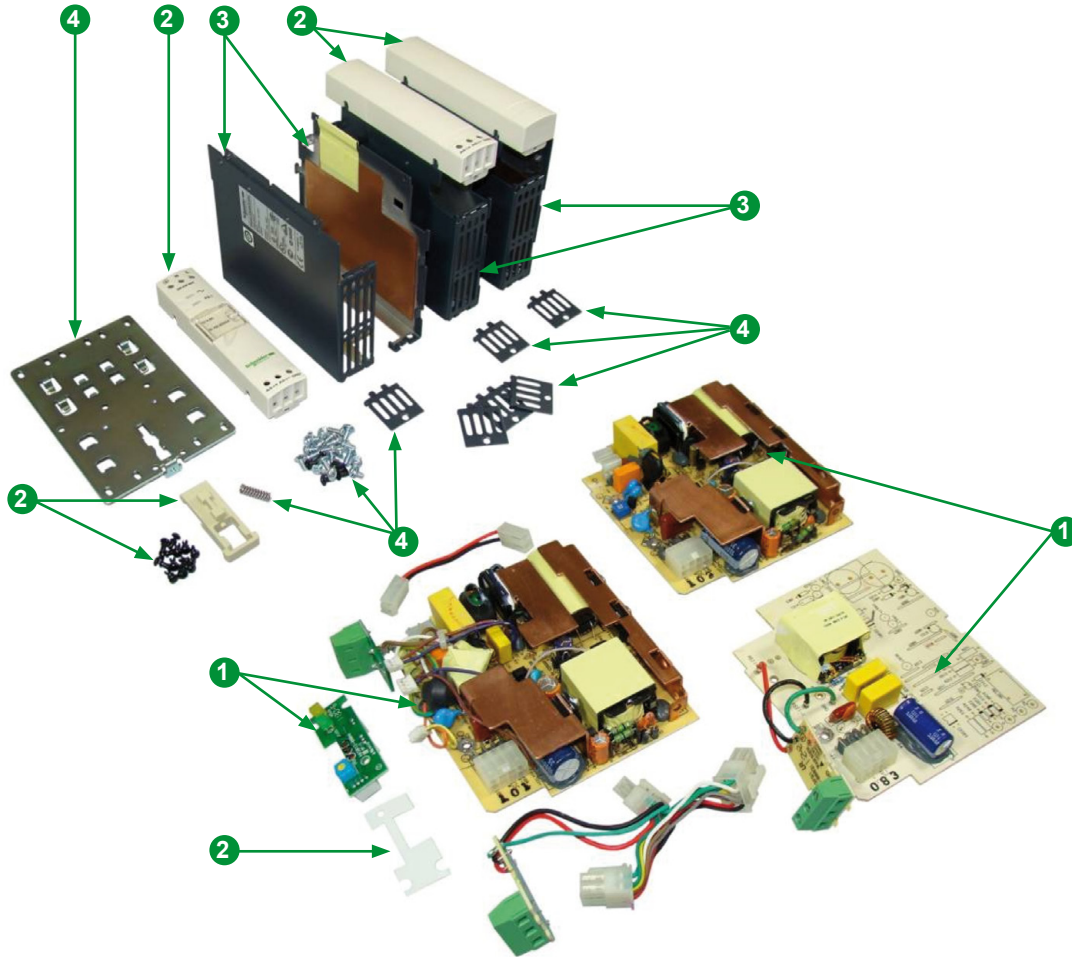

Recommendation	Number on drawing	Components	Weight (g)	Comment
Operating hazards	None	None	–	–
Reuse	None	None	–	–
Special treatment	①	PCBAs	525 – 723	–
Other dismantling	②	Plastic / Polycarbonate	55 – 69	–
	③	Aluminium	115 – 337	–
	④	Steel	105 – 171	–
	None	Cables and Connectors	–	–

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V2.

Publication : Schneider Electric