

Product End-of-Life Instructions


RTC48 Zelio Temperature Controller

Product Range

RTC48 Zelio Temperature Controller

Marketing Model

RTC48PUNCRRLU, RTC48PUN1RNHU, RTC48PUN1RNLU, RTC48PUN1SNHU, RTC48PUN1SNLU, RTC48PUNCRNHU, RTC48PUNCRNLU, RTC48PUNCSNHU, RTC48PUNCSNLU, RTC48PUN1RRHU, RTC48PUN1RRLU, RTC48PUN1SRHU, RTC48PUN1SRLU, RTC48PUN2RNHU, RTC48PUN2RNLU, RTC48PUN2SNHU, RTC48PUN2SNLU, RTC48PUNCRRHU, RTC48PUNCSRHU, RTC48PUNCSRSLU, RTC48PUN1RSHU, RTC48PUN1RSLU, RTC48PUN1SSHU, RTC48PUN1SSLU, RTC48PUNCRSHU, RTC48PUNCRSLU, RTC48PUNCSSHU, RTC48PUNCSSLU, RTCCBL, RTCCOV, RTCACC, RTCACC

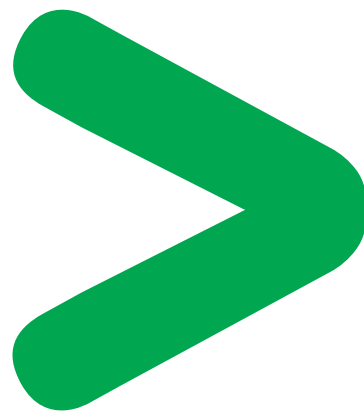

Size in mm :

H x L x D : 48 x 48 x 50

Weight in g (excluding packaging) :

Between 130 and 170 without battery




Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇒ **Separation for special treatment** ⇒ **Other dismantling** ⇒ **Shredding**

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

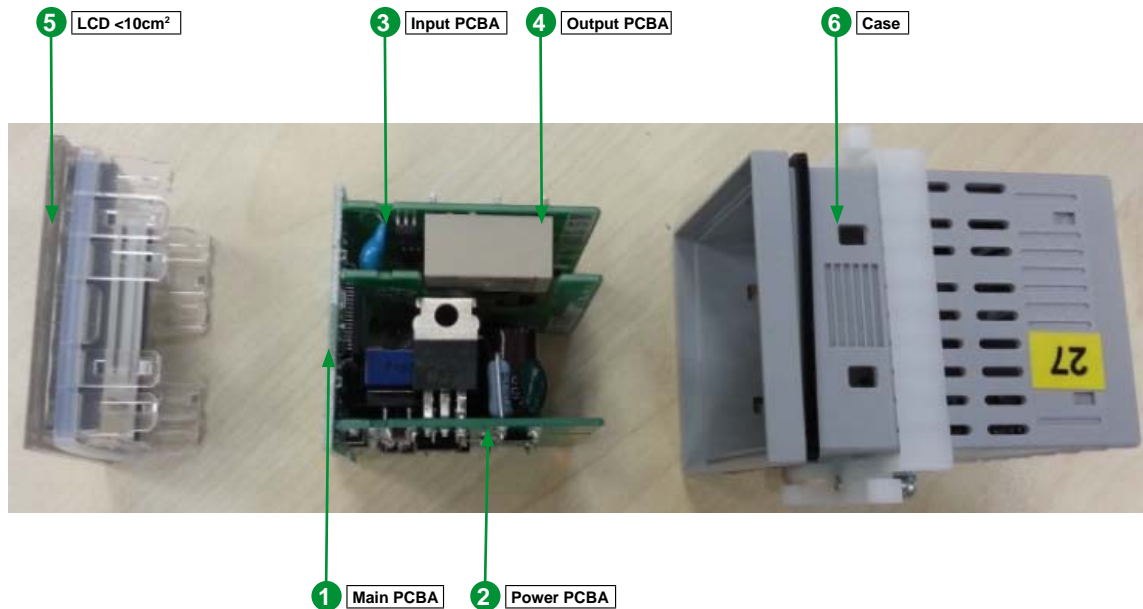

Recommendation	Number on drawing	Components	Weight (g)	Comments
Depollution	1 2 3 4	PCBA	49	-
Depollution	5	LCD <10cm ²	7	-
Shredding	6	Case	42	-

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V3.

Publication : Schneider Electric